
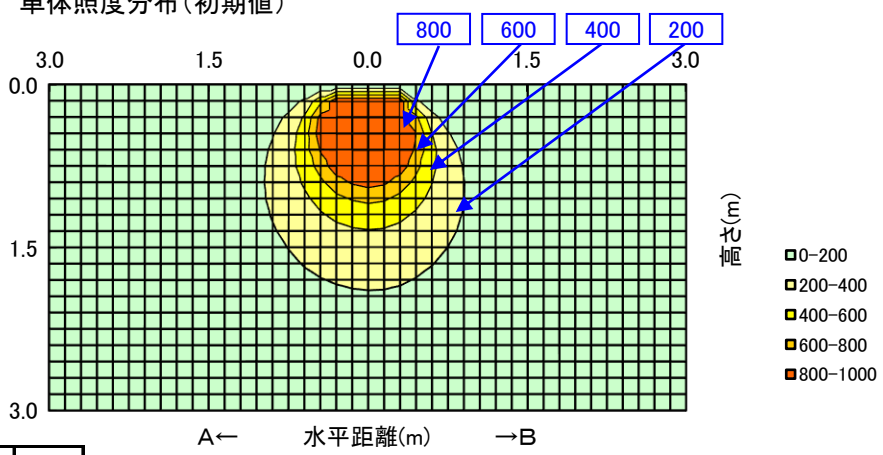
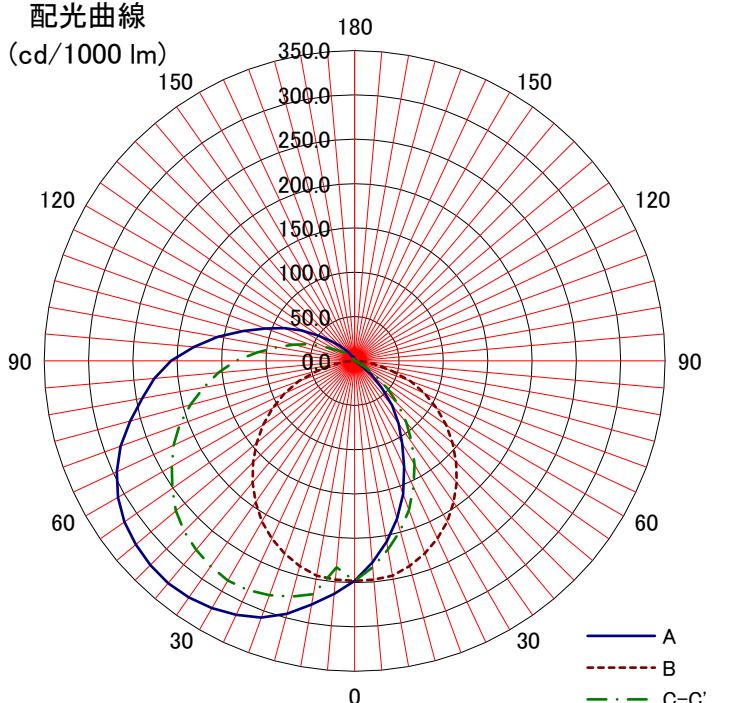


日立照明器具 照明特性

名称: 交換形LED ウォールウォッシャ形	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
形式: NC4D	室指数		固有照明率 S/H=1.0													
〈備考〉	0.6	0.53	0.41	0.33	0.51	0.40	0.32	0.27	0.37	0.31	0.26	0.35	0.29	0.25	0.22	
	0.8	0.62	0.50	0.42	0.60	0.48	0.41	0.35	0.46	0.39	0.34	0.43	0.37	0.33	0.29	
姿図 	1	0.68	0.56	0.48	0.65	0.55	0.47	0.41	0.52	0.45	0.40	0.49	0.43	0.38	0.34	
	1.25	0.74	0.63	0.55	0.71	0.61	0.53	0.48	0.57	0.51	0.46	0.54	0.49	0.44	0.40	
	1.5	0.78	0.68	0.60	0.75	0.66	0.59	0.53	0.62	0.56	0.51	0.59	0.53	0.49	0.44	
	2	0.84	0.75	0.68	0.81	0.73	0.66	0.61	0.69	0.63	0.58	0.65	0.60	0.56	0.51	
	2.5	0.87	0.79	0.73	0.84	0.77	0.71	0.66	0.73	0.68	0.63	0.69	0.64	0.61	0.55	
	3	0.89	0.83	0.77	0.87	0.80	0.75	0.70	0.76	0.71	0.67	0.71	0.68	0.64	0.59	
光源形式 CET403WF-N14A	4	0.93	0.87	0.82	0.90	0.85	0.80	0.76	0.80	0.76	0.73	0.76	0.72	0.69	0.64	
	5	0.95	0.90	0.86	0.92	0.88	0.84	0.80	0.83	0.80	0.77	0.78	0.76	0.73	0.67	
器具光束 2,890 lm	7	0.98	0.94	0.91	0.95	0.92	0.89	0.86	0.87	0.84	0.82	0.82	0.80	0.78	0.72	
	10	1.00	0.97	0.95	0.97	0.95	0.93	0.90	0.90	0.88	0.86	0.85	0.84	0.82	0.76	
器具効率 Ft= 100% 上方光束 Fu= 13.2% 下方光束 Fd= 86.8%		単体照度分布(初期値) 														
最大取付間隔 A-A 1.30 H B-B 1.26 H		配光曲線 (cd/1000 lm) 														
保守率 良 0.86 中 0.81 否 0.72	光度 (cd/1000 lm)	A-0	B-B	C-0	A'-0	C'-0										
		0	248	248	248	248	248	248	248	248	248	248	248	248	248	248
		10	279	246	267	207	216									
		20	308	231	281	160	179									
		30	322	209	286	107	135									
		40	327	179	278	66	91									
		50	322	144	263	25	49									
		60	308	107	238		14									
		70	281	67	210											
		80	243	26	173											
		90	207	3	134											
		100	157	3	89											
		110	107	2	55											
		120	69	1	26											
		130	35	1	13											
		140	17	1	7											
		150	7	1	4											
		160	4	1	2											
		170	4	2	2											
		180														