
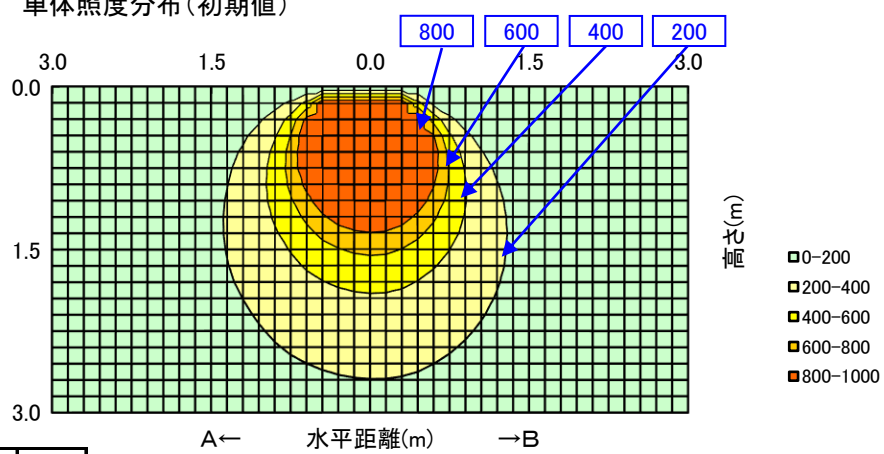
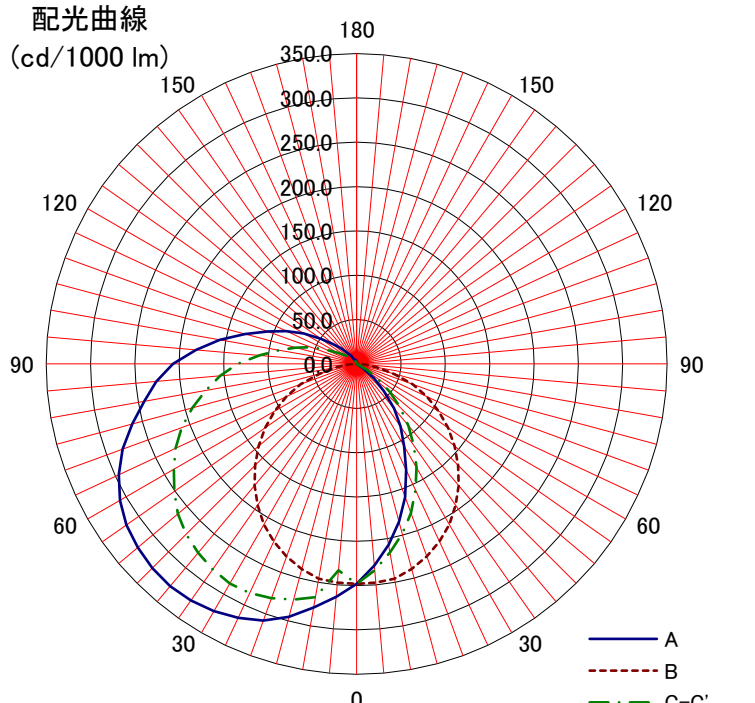
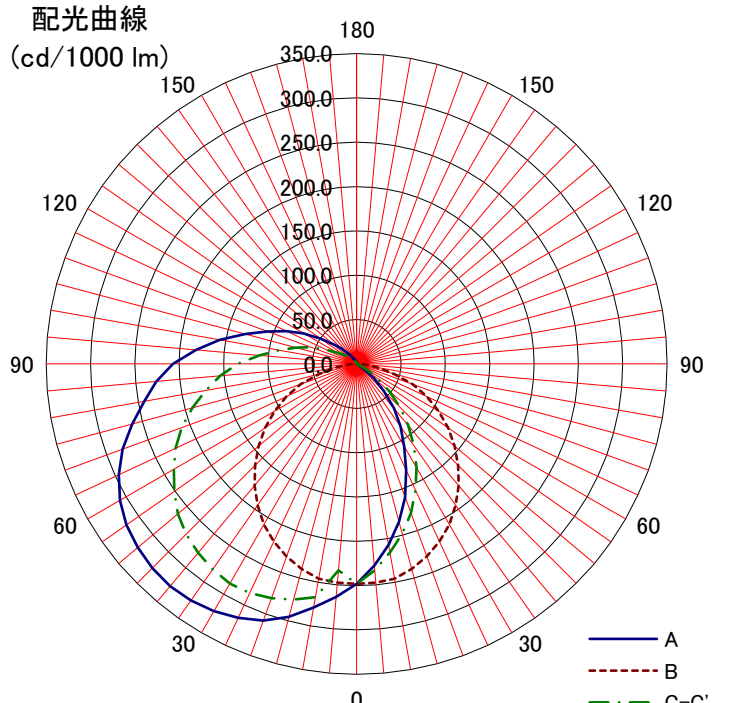


日立照明器具 照明特性

名称: 交換形LED ウォールウォッシュ形		天井	80%			70%				50%			30%			0%				
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
形式: NC4D		床	10%															0%		
			固有照明率 S/H=1.0																	
＜備考＞		室指数	0.6	0.53	0.41	0.33	0.51	0.40	0.32	0.27	0.37	0.31	0.26	0.35	0.29	0.25	0.22			
		0.8 <td>0.62</td> <td>0.50</td> <td>0.42</td> <td>0.60</td> <td>0.48</td> <td>0.41</td> <td>0.35</td> <td>0.46</td> <td>0.39</td> <td>0.34</td> <td>0.43</td> <td>0.37</td> <td>0.33</td> <td>0.29</td> <td></td>	0.62	0.50	0.42	0.60	0.48	0.41	0.35	0.46	0.39	0.34	0.43	0.37	0.33	0.29				
姿図 		1	0.68	0.56	0.48	0.65	0.55	0.47	0.41	0.52	0.45	0.40	0.49	0.43	0.38	0.34				
		1.25	0.74	0.63	0.55	0.71	0.61	0.53	0.48	0.57	0.51	0.46	0.54	0.49	0.44	0.40				
		1.5	0.78	0.68	0.60	0.75	0.66	0.59	0.53	0.62	0.56	0.51	0.59	0.53	0.49	0.44				
		2	0.84	0.75	0.68	0.81	0.73	0.66	0.61	0.69	0.63	0.58	0.65	0.60	0.56	0.51				
		2.5	0.87	0.79	0.73	0.84	0.77	0.71	0.66	0.73	0.68	0.63	0.69	0.64	0.61	0.55				
		3	0.89	0.83	0.77	0.87	0.80	0.75	0.70	0.76	0.71	0.67	0.71	0.68	0.64	0.59				
光源形式 CET406NE-C14A		4	0.93	0.87	0.82	0.90	0.85	0.80	0.76	0.80	0.76	0.73	0.76	0.72	0.69	0.64				
		5	0.95	0.90	0.86	0.92	0.88	0.84	0.80	0.83	0.80	0.77	0.78	0.76	0.73	0.67				
器具光束 5,840 lm		7	0.98	0.94	0.91	0.95	0.92	0.89	0.86	0.87	0.84	0.82	0.82	0.80	0.78	0.72				
		10	1.00	0.97	0.95	0.97	0.95	0.93	0.90	0.90	0.88	0.86	0.85	0.84	0.82	0.76				
器具効率 Ft= 100%			<div>単体照度分布(初期値)</div> 																	
上方光束 Fu= 13.2%																				
下方光束 Fd= 86.8%																				
最大取付間隔			<div>配光曲線</div> 																	
A-A 1.30 H																				
B-B 1.26 H																				
保守率	良	0.86																		
	中	0.81																		
	否	0.72																		
光度 (cd/1000 lm)																		<div>配光曲線</div> 		
	A-0	B-B	C-0	A'-0	C'-0															
0	248	248	248	248	248															
10	279	246	267	207	216															
20	308	231	281	160	179															
30	322	209	286	107	135															
40	327	179	278	66	91															
50	322	144	263	25	49															
60	308	107	238		14															
70	281	67	210																	
80	243	26	173																	
90	207	3	134																	
100	157	3	89																	
110	107	2	55																	
120	69	1	26																	
130	35	1	13																	
140	17	1	7																	
150	7	1	4																	
160	4	1	2																	
170	4	2	2																	
180																				