
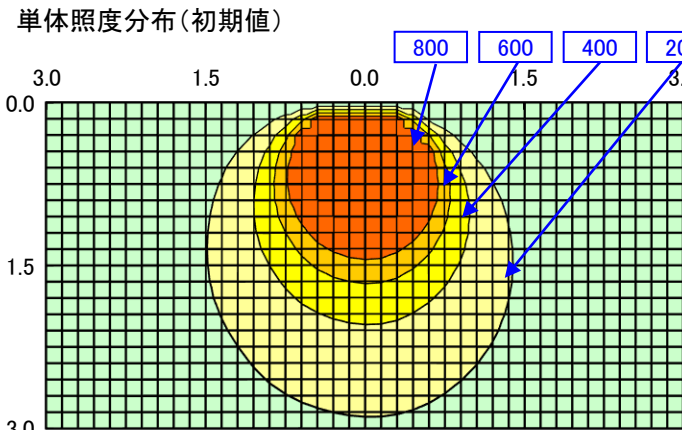
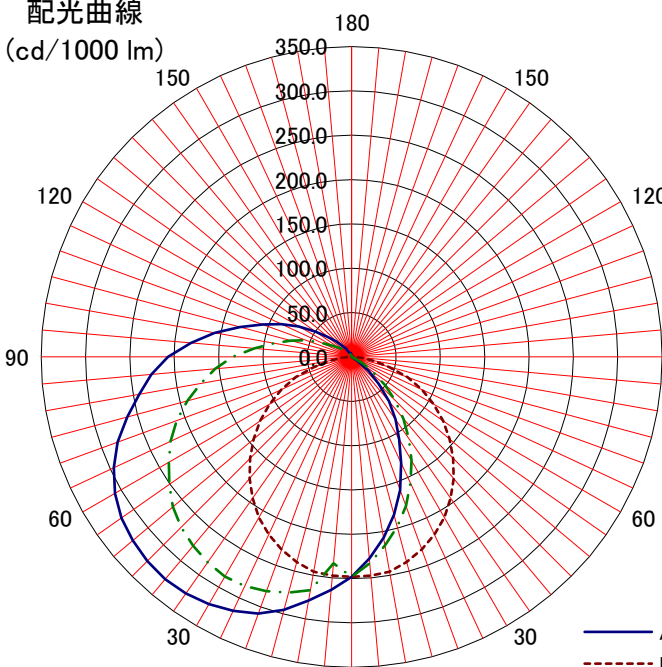
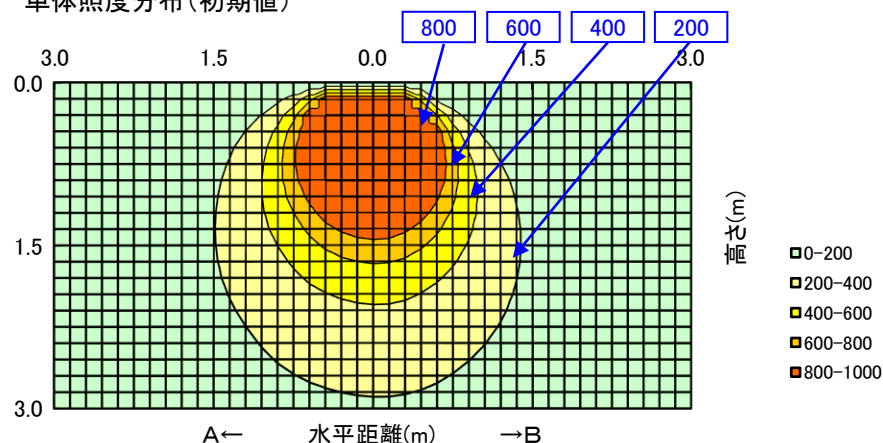


日立照明器具 照明特性

名称: 交換形LED ウォールウォッシュ形	天井 壁 床	80%			70%				50%			30%			0%	
		70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		10%														0%
形式: NC4D	室指数	固有照明率 S/H=1.0														
＜備考＞	0.6	0.53	0.41	0.33	0.51	0.40	0.32	0.27	0.37	0.31	0.26	0.35	0.29	0.25	0.22	
	0.8	0.62	0.50	0.42	0.60	0.48	0.41	0.35	0.46	0.39	0.34	0.43	0.37	0.33	0.29	
姿図 	1	0.68	0.56	0.48	0.65	0.55	0.47	0.41	0.52	0.45	0.40	0.49	0.43	0.38	0.34	
	1.25	0.74	0.63	0.55	0.71	0.61	0.53	0.48	0.57	0.51	0.46	0.54	0.49	0.44	0.40	
	1.5	0.78	0.68	0.60	0.75	0.66	0.59	0.53	0.62	0.56	0.51	0.59	0.53	0.49	0.44	
	2	0.84	0.75	0.68	0.81	0.73	0.66	0.61	0.69	0.63	0.58	0.65	0.60	0.56	0.51	
	2.5	0.87	0.79	0.73	0.84	0.77	0.71	0.66	0.73	0.68	0.63	0.69	0.64	0.61	0.55	
	3	0.89	0.83	0.77	0.87	0.80	0.75	0.70	0.76	0.71	0.67	0.71	0.68	0.64	0.59	
光源形式 CET407WE-N14A	4	0.93	0.87	0.82	0.90	0.85	0.80	0.76	0.80	0.76	0.73	0.76	0.72	0.69	0.64	
	5	0.95	0.90	0.86	0.92	0.88	0.84	0.80	0.83	0.80	0.77	0.78	0.76	0.73	0.67	
器具光束 6,740 lm	7	0.98	0.94	0.91	0.95	0.92	0.89	0.86	0.87	0.84	0.82	0.82	0.80	0.78	0.72	
	10	1.00	0.97	0.95	0.97	0.95	0.93	0.90	0.90	0.88	0.86	0.85	0.84	0.82	0.76	
器具効率 Ft= 100%		<div>単体照度分布 (初期値)</div>  <div>800 600 400 200</div> <div>3.0 1.5 0.0 1.5 3.0</div> <div>0.0 1.5 3.0</div> <div>A ← 水平距離(m) → B</div> <div>(E) lux</div> <div>0-200 200-400 400-600 600-800 800-1000</div>														
上方光束 Fu= 13.2%																
下方光束 Fd= 86.8%																
最大取付間隔		<div>配光曲線</div> <div>(cd/1000 lm)</div>  <div>180 150 120 90 60 30 0</div> <div>350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0</div> <div>A B C-C'</div>														
A-A 1.30 H																
B-B 1.26 H																
保守率																
良	0.86															
中	0.81															
否	0.72															
光度 (cd/1000 lm)																
	A-0 B-B C-0 A'-0 C'-0															
0	248 248 248 248 248															
10	279 246 267 207 216															
20	308 231 281 160 179															
30	322 209 286 107 135															
40	327 179 278 66 91															
50	322 144 263 25 49															
60	308 107 238 14															
70	281 67 210															
80	243 26 173															
90	207 3 134															
100	157 3 89															
110	107 2 55															
120	69 1 26															
130	35 1 13															
140	17 1 7															
150	7 1 4															
160	4 1 2															
170	4 2 2															
180																

単体照度分布(初期値)



配光曲線
(cd/1000 lm)

