

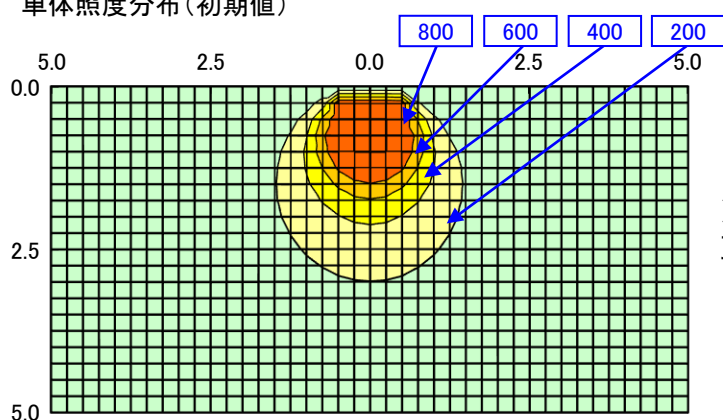


日立照明器具 照明特性

名称: 交換形LED逆富士形	天井	80%			70%				50%			30%			0%													
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%												
			床	10%													0%											
形式: NC8B	反射率	固有照明率 S/H=1.0																										
<備考>	室指数																											
	0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28													
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37													
姿図 	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43													
	1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50													
	1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55													
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63													
	2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68													
	3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71													
光源形式	4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76													
CE806LE-N14A	5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80													
器具光束	7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84													
5,630 lm	10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88													
器具効率 Ft= 100%		単体照度分布(初期値) 																										
上方光束 Fu= 3.5%																												
下方光束 Fd= 96.5%																												
最大取付間隔																												
A-A 1.28 H																												
B-B 1.26 H																												
保守率	良	0.88																										
	中	0.86																										
	否	0.81																										
光度 (cd/1000 lm)																												
	A-0	B-B	C-0	A'-0	C'-0																							
0	318	318	318																									
10	312	313	313																									
20	296	295	296																									
30	271	268	268																									
40	239	232	235																									
50	197	189	191																									
60	154	136	148																									
70	110	89	102																									
80	69	35	54																									
90	41	5	25																									
100	21	5	12																									
110	13	3	6																									
120	5	2	1																									
130																												
140																												
150																												
160																												
170																												
180																												

配光曲線
(cd/1000 lm)

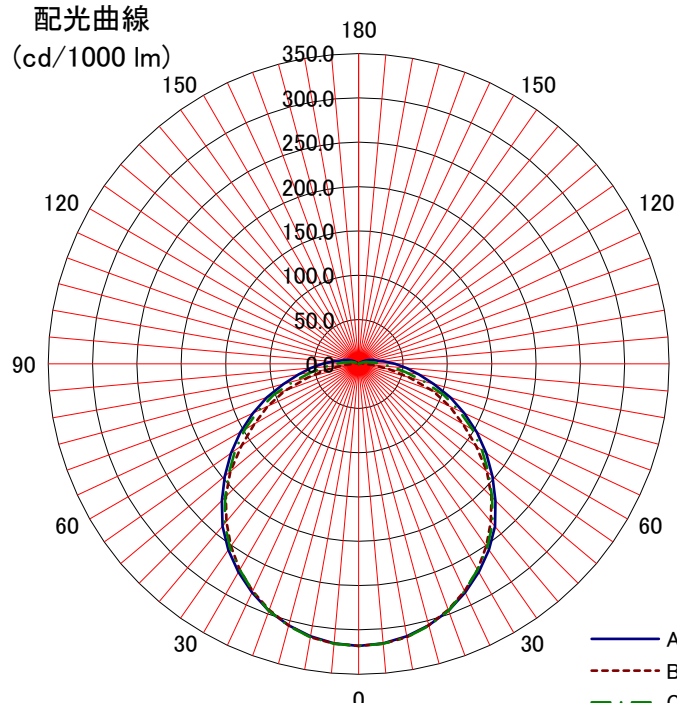

— A
- - - B
· · · C-C'