
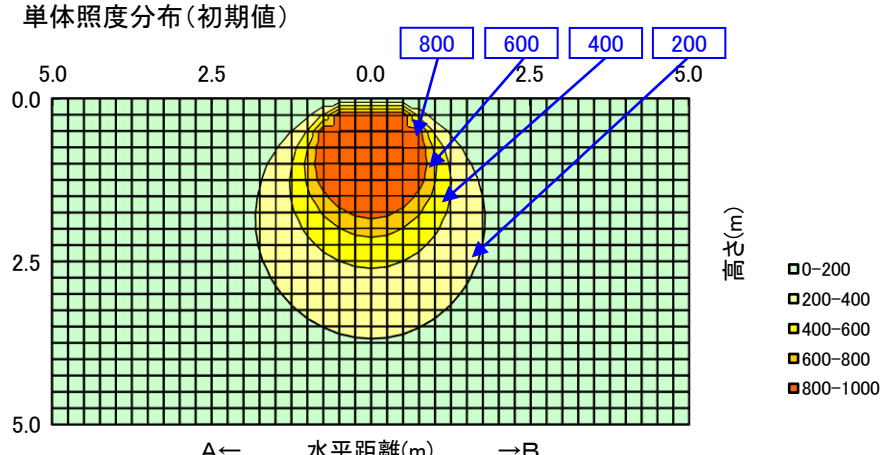
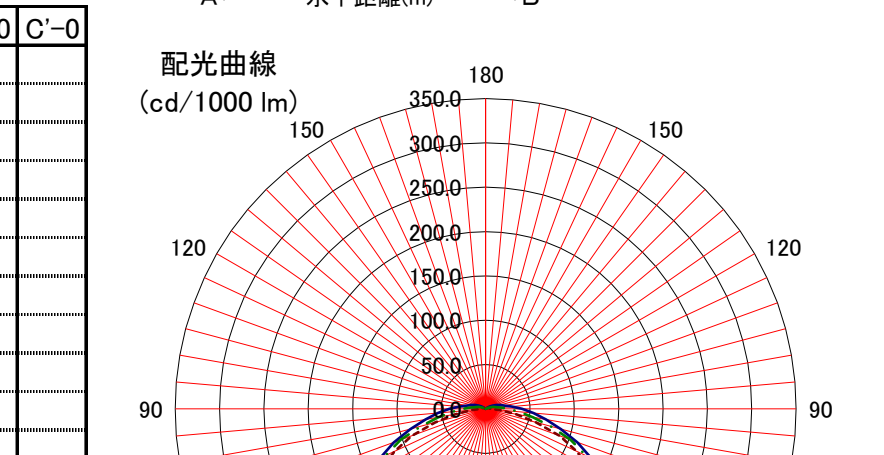
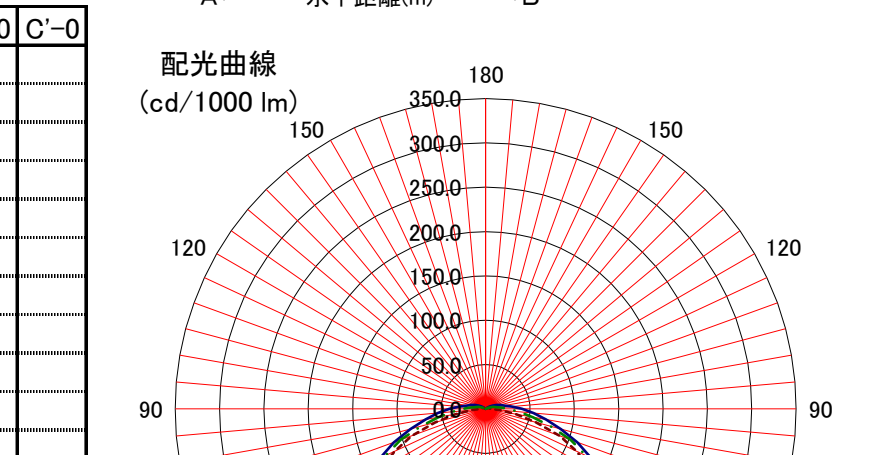


日立照明器具 照明特性

名称: 交換形LED逆富士形	反射率	天井	80%			70%				50%			30%			0%			
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%														0%		
形式: NC8B	室指数	固有照明率 S/H=1.0																	
〈備考〉	0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28				
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37				
姿図 	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43				
	1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50				
	1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55				
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63				
	2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68				
	3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71				
光源形式	4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76				
CE808WWE-N14A	5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80				
器具光束	7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84				
8,540 lm	10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88				
器具効率 Ft= 100%		単体照度分布(初期値) 																	
上方光束 Fu= 3.5%																			
下方光束 Fd= 96.5%																			
最大取付間隔		A← 水平距離(m) →B 配光曲線 (cd/1000 lm) 																	
A-A 1.28 H																			
B-B 1.26 H																			
保守率	良	0.88	A — B - - - C-C' - · -																
	中	0.86																	
	否	0.81																	
光度 (cd/1000 lm)		A← 水平距離(m) →B 配光曲線 (cd/1000 lm) 																	
	A-0															B-B	C-0	A'-0	C'-0
	0	318	318	318															
	10	312	313	313															
	20	296	295	296															
	30	271	268	268															
	40	239	232	235															
	50	197	189	191															
	60	154	136	148															
	70	110	89	102															
	80	69	35	54															
	90	41	5	25															
	100	21	5	12															
	110	13	3	6															
	120	5	2	1															
	130																		
	140																		
	150																		
	160																		
	170																		
	180																		