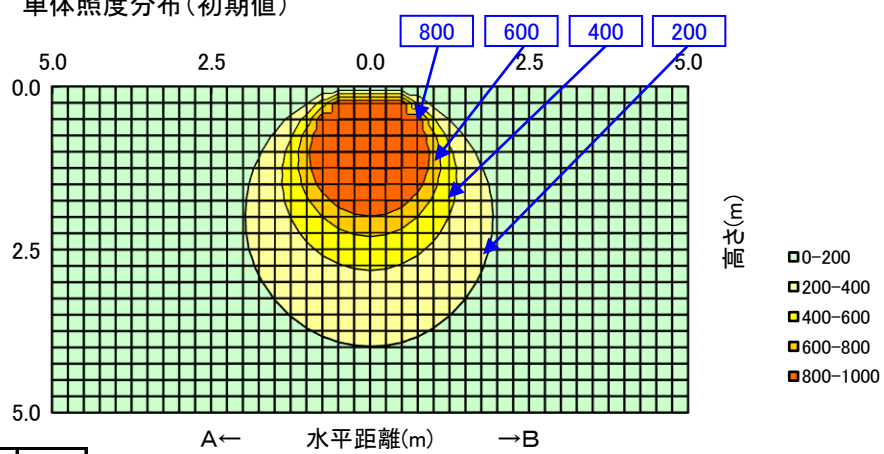


日立照明器具 照明特性

名称: 交換形LED逆富士形	天井	反射率	80%			70%				50%			30%			0%																										
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																									
			床	10%														0%																								
形式: NC8B		室指数	固有照明率 S/H=1.0																																							
<備考>	0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28																											
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37																											
姿図	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43																											
	1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50																											
	1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55																											
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63																											
	2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68																											
	3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71																											
光源形式	4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76																											
CE810NE-C24A	5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80																											
器具光束	7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84																											
10,000 lm	10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88																											
器具効率 Ft= 100%		単体照度分布(初期値)																																								
上方光束 Fu= 3.5%																																										
下方光束 Fd= 96.5%																																										
最大取付間隔																																										
A-A 1.28 H																																										
B-B 1.26 H																																										
保守率	良	0.88																																								
	中	0.86																																								
	否	0.81																																								
光度 (cd/1000 lm)																																										
	A-0	B-B	C-0	A'-0	C'-0																																					
0	318	318	318																																							
10	312	313	313																																							
20	296	295	296																																							
30	271	268	268																																							
40	239	232	235																																							
50	197	189	191																																							
60	154	136	148																																							
70	110	89	102																																							
80	69	35	54																																							
90	41	5	25																																							
100	21	5	12																																							
110	13	3	6																																							
120	5	2	1																																							
130																																										
140																																										
150																																										
160																																										
170																																										
180																																										
配光曲線 (cd/1000 lm)																																										