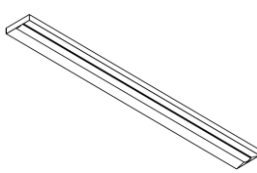
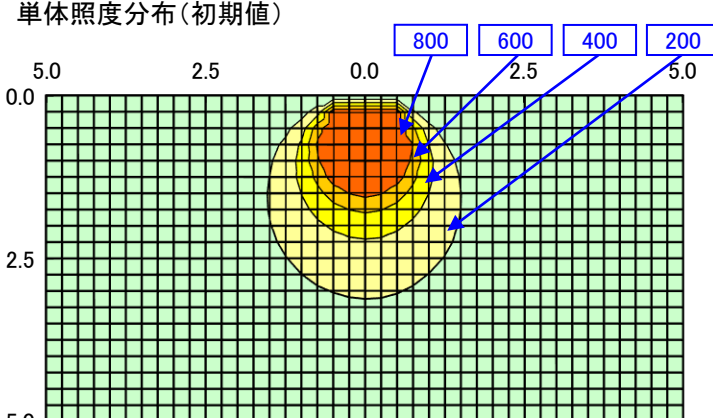
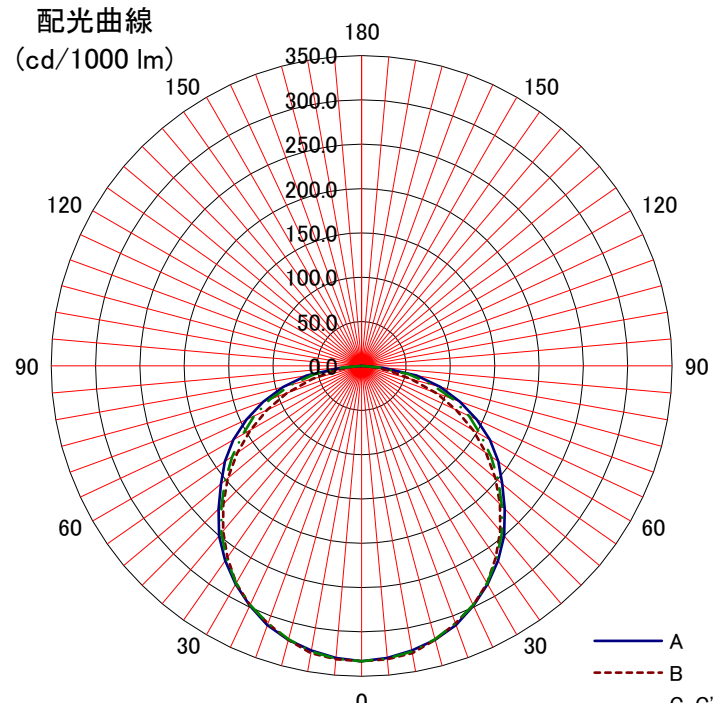


日立照明器具 照明特性

名称: 交換形LED下面開放形	天井	80%			70%				50%			30%			0%					
		反射率	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
			床	10%														0%		
形式: NC8C	室指数	固有照明率 S/H=1.0																		
〈備考〉	0.6	0.57	0.45	0.37	0.56	0.45	0.37	0.32	0.43	0.37	0.32	0.42	0.36	0.32	0.30					
	0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.52	0.46	0.41	0.39					
姿図 	1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.60	0.53	0.48	0.58	0.52	0.48	0.45					
	1.25	0.79	0.69	0.62	0.77	0.68	0.61	0.56	0.66	0.60	0.55	0.65	0.59	0.55	0.52					
	1.5	0.83	0.74	0.67	0.82	0.73	0.67	0.62	0.71	0.66	0.61	0.70	0.65	0.60	0.58					
	2	0.89	0.82	0.75	0.87	0.80	0.75	0.70	0.78	0.73	0.69	0.76	0.72	0.68	0.66					
	2.5	0.92	0.86	0.81	0.91	0.85	0.80	0.75	0.83	0.78	0.74	0.81	0.77	0.74	0.71					
	3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75					
	4	0.98	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.80					
光源形式 CE806NE-X14A	5	1.00	0.96	0.93	0.98	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.88	0.86	0.83					
器具光束 5,840 lm	7	1.02	1.00	0.97	1.01	0.99	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88					
	10	1.04	1.02	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92					
器具効率 Ft= 100%		<div>単体照度分布 (初期値)</div> 																		
上方光束 Fu= 0%																				
下方光束 Fd= 100%																				
最大取付間隔		A← 水平距離(m) →B																		
A-A 1.28 H																				
B-B 1.26 H																				
保守率	良	0.86																		
	中	0.81																		
	否	0.72																		
光度 (cd/1000 lm)		<div>配光曲線 (cd/1000 lm)</div> 																		
	A-0																B-B	C-0	A'-0	C'-0
0	333																333	333		
10	326																329	327		
20	311																309	309		
30	284																283	283		
40	250																243	246		
50	207																197	201		
60	167																145	155		
70	118																90	110		
80	63																32	54		
90																				
100																				
110																				
120																				
130																				
140																				
150																				
160																				
170																				
180																				