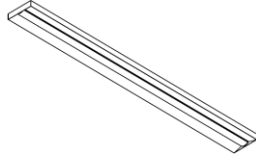
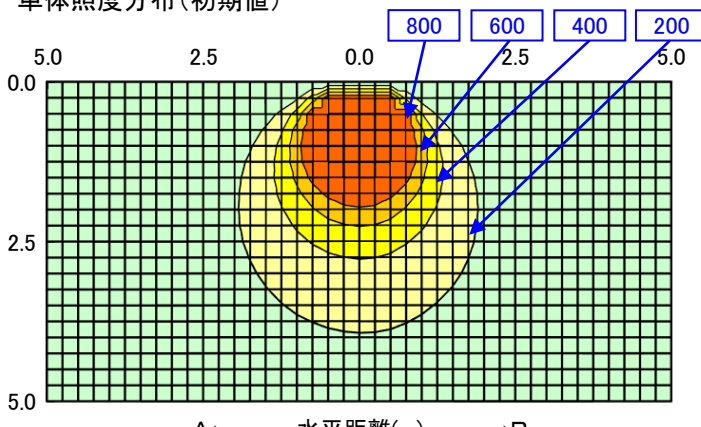
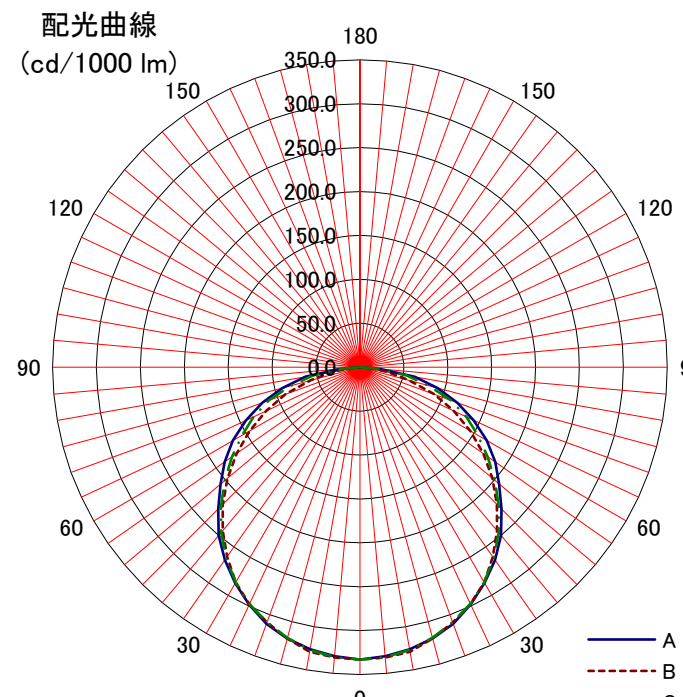


日立照明器具 照明特性

| | | | | | | | | | | | | | | | | | |
|---|----------------------------|--|------|------|------|------|------|------|------|------|------|------|------|------|------|----|----|
| 名称: 交換形LED下面開放形 | 反射率 | 天井 | 80% | | | | 70% | | | | 50% | | | 30% | | | 0% |
| | | 壁 | 70% | 50% | 30% | 70% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0% | |
| | | 床 | 10% | | | | | | | | | | | | | | 0% |
| 形式: NC8C | 室指数 | 固有照明率 S/H=1.0 | | | | | | | | | | | | | | | |
| 〈備考〉 | 0.6 | 0.57 | 0.45 | 0.37 | 0.56 | 0.45 | 0.37 | 0.32 | 0.43 | 0.37 | 0.32 | 0.42 | 0.36 | 0.32 | 0.30 | | |
| | 0.8 | 0.67 | 0.55 | 0.47 | 0.65 | 0.54 | 0.47 | 0.41 | 0.53 | 0.46 | 0.41 | 0.52 | 0.46 | 0.41 | 0.39 | | |
| 姿図  | 1 | 0.73 | 0.62 | 0.54 | 0.71 | 0.61 | 0.54 | 0.48 | 0.60 | 0.53 | 0.48 | 0.58 | 0.52 | 0.48 | 0.45 | | |
| | 1.25 | 0.79 | 0.69 | 0.62 | 0.77 | 0.68 | 0.61 | 0.56 | 0.66 | 0.60 | 0.55 | 0.65 | 0.59 | 0.55 | 0.52 | | |
| | 1.5 | 0.83 | 0.74 | 0.67 | 0.82 | 0.73 | 0.67 | 0.62 | 0.71 | 0.66 | 0.61 | 0.70 | 0.65 | 0.60 | 0.58 | | |
| | 2 | 0.89 | 0.82 | 0.75 | 0.87 | 0.80 | 0.75 | 0.70 | 0.78 | 0.73 | 0.69 | 0.76 | 0.72 | 0.68 | 0.66 | | |
| | 2.5 | 0.92 | 0.86 | 0.81 | 0.91 | 0.85 | 0.80 | 0.75 | 0.83 | 0.78 | 0.74 | 0.81 | 0.77 | 0.74 | 0.71 | | |
| | 3 | 0.95 | 0.89 | 0.84 | 0.93 | 0.88 | 0.83 | 0.79 | 0.86 | 0.82 | 0.78 | 0.84 | 0.80 | 0.77 | 0.75 | | |
| 光源形式 | 4 | 0.98 | 0.93 | 0.89 | 0.96 | 0.92 | 0.88 | 0.85 | 0.90 | 0.87 | 0.84 | 0.88 | 0.85 | 0.83 | 0.80 | | |
| CE810DG-C24A | 5 | 1.00 | 0.96 | 0.93 | 0.98 | 0.95 | 0.92 | 0.89 | 0.93 | 0.90 | 0.88 | 0.91 | 0.88 | 0.86 | 0.83 | | |
| 器具光束 | 7 | 1.02 | 1.00 | 0.97 | 1.01 | 0.99 | 0.96 | 0.94 | 0.96 | 0.94 | 0.92 | 0.94 | 0.92 | 0.91 | 0.88 | | |
| 9,260 lm | 10 | 1.04 | 1.02 | 1.01 | 1.03 | 1.01 | 1.00 | 0.98 | 0.99 | 0.98 | 0.96 | 0.97 | 0.96 | 0.95 | 0.92 | | |
| 器具効率 Ft= 100% | | <div>単体照度分布 (初期値)</div>  <div>5.0 2.5 0.0 2.5 5.0</div> <div>0.0 2.5 5.0</div> <div>水平距離(m)</div> <div>垂直距離(m)</div> <div>0-200 200-400 400-600 600-800 800-1000</div> | | | | | | | | | | | | | | | |
| 上方光束 Fu= 0% | | | | | | | | | | | | | | | | | |
| 下方光束 Fd= 100% | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| 最大取付間隔 | | <div>配光曲線 (cd/1000 lm)</div>  <div>350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0</div> <div>180 150 120 90 60 30 0 30 60 90 120 150 180</div> <div>水平距離(m)</div> <div>垂直距離(m)</div> <div>A B C-C'</div> | | | | | | | | | | | | | | | |
| A-A 1.28 H | | | | | | | | | | | | | | | | | |
| B-B 1.26 H | | | | | | | | | | | | | | | | | |
| 保守率 | 良 0.86 中 0.81 否 0.72 | | | | | | | | | | | | | | | | |
| 光度 (cd/1000 lm) | | | | | | | | | | | | | | | | | |
| | A-0 | B-B | C-0 | A'-0 | C'-0 | | | | | | | | | | | | |
| 0 | 333 | 333 | 333 | | | | | | | | | | | | | | |
| 10 | 326 | 329 | 327 | | | | | | | | | | | | | | |
| 20 | 311 | 309 | 309 | | | | | | | | | | | | | | |
| 30 | 284 | 283 | 283 | | | | | | | | | | | | | | |
| 40 | 250 | 243 | 246 | | | | | | | | | | | | | | |
| 50 | 207 | 197 | 201 | | | | | | | | | | | | | | |
| 60 | 167 | 145 | 155 | | | | | | | | | | | | | | |
| 70 | 118 | 90 | 110 | | | | | | | | | | | | | | |
| 80 | 63 | 32 | 54 | | | | | | | | | | | | | | |
| 90 | | | | | | | | | | | | | | | | | |
| 100 | | | | | | | | | | | | | | | | | |
| 110 | | | | | | | | | | | | | | | | | |
| 120 | | | | | | | | | | | | | | | | | |
| 130 | | | | | | | | | | | | | | | | | |
| 140 | | | | | | | | | | | | | | | | | |
| 150 | | | | | | | | | | | | | | | | | |
| 160 | | | | | | | | | | | | | | | | | |
| 170 | | | | | | | | | | | | | | | | | |
| 180 | | | | | | | | | | | | | | | | | |