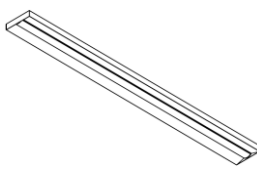
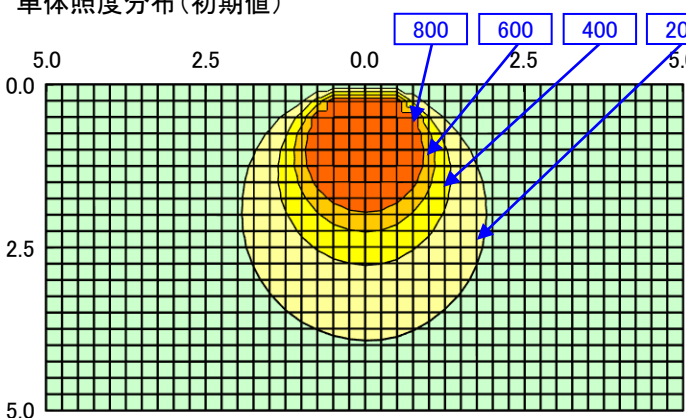
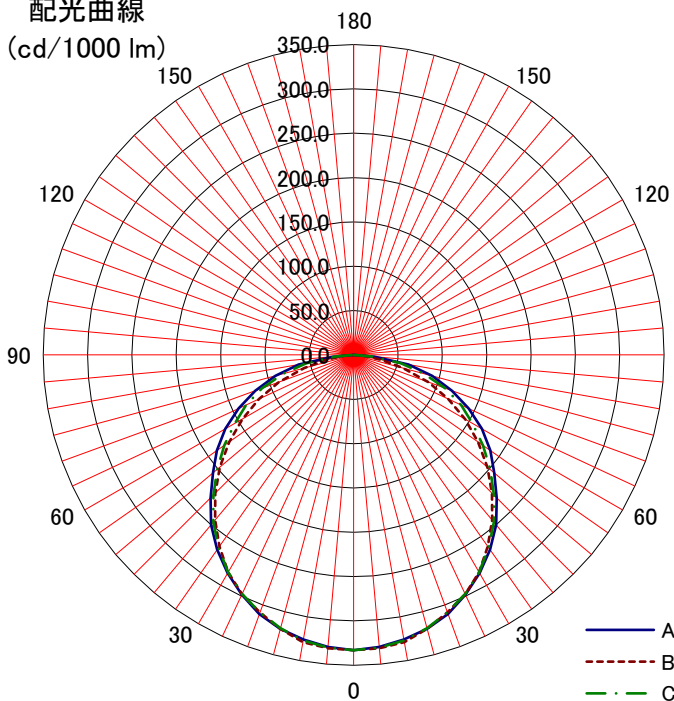


日立照明器具 照明特性

名称: 交換形LED下面開放形			天井	80%			70%				50%			30%			0%		
				壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
					床	10%													
形式: NC8C			反射率	固有照明率 S/H=1.0															
				室指数															
〈備考〉			0.6	0.57	0.45	0.37	0.56	0.45	0.37	0.32	0.43	0.37	0.32	0.42	0.36	0.32	0.30		
			0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.52	0.46	0.41	0.39		
姿図 			1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.60	0.53	0.48	0.58	0.52	0.48	0.45		
			1.25	0.79	0.69	0.62	0.77	0.68	0.61	0.56	0.66	0.60	0.55	0.65	0.59	0.55	0.52		
			1.5	0.83	0.74	0.67	0.82	0.73	0.67	0.62	0.71	0.66	0.61	0.70	0.65	0.60	0.58		
			2	0.89	0.82	0.75	0.87	0.80	0.75	0.70	0.78	0.73	0.69	0.76	0.72	0.68	0.66		
			2.5	0.92	0.86	0.81	0.91	0.85	0.80	0.75	0.83	0.78	0.74	0.81	0.77	0.74	0.71		
			3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75		
光源形式			4	0.98	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.80		
CE810DE-N24A			5	1.00	0.96	0.93	0.98	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.88	0.86	0.83		
器具光束			7	1.02	1.00	0.97	1.01	0.99	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88		
9,260 lm			10	1.04	1.02	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92		
器具効率 Ft= 100%			<div>単体照度分布 (初期値)</div> 																
上方光束 Fu= 0%																			
下方光束 Fd= 100%																			
最大取付間隔			<div>A← 水平距離(m) →B</div> 																
A-A 1.28 H																			
B-B 1.26 H																			
保守率	良	0.86																	
	中	0.81																	
	否	0.72																	
光度 (cd/1000 lm)																			
	A-0	B-B	C-0	A'-0	C'-0														
0	333	333	333																
10	326	329	327																
20	311	309	309																
30	284	283	283																
40	250	243	246																
50	207	197	201																
60	167	145	155																
70	118	90	110																
80	63	32	54																
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			