


日立照明器具 照明特性

名称:交換形LED ウォールウォッシャ形		天井	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
形式:NC8D		床	10%															0%
			固有照明率 S/H=1.0															
＜備考＞		0.6	0.53	0.41	0.33	0.51	0.40	0.32	0.27	0.37	0.31	0.26	0.35	0.29	0.25	0.22		
		0.8	0.62	0.50	0.42	0.60	0.48	0.41	0.35	0.46	0.39	0.34	0.43	0.37	0.33	0.29		
姿図 		1	0.68	0.56	0.48	0.65	0.55	0.47	0.41	0.52	0.45	0.40	0.49	0.43	0.38	0.34		
		1.25	0.74	0.63	0.55	0.71	0.61	0.53	0.48	0.57	0.51	0.46	0.54	0.49	0.44	0.40		
		1.5	0.78	0.68	0.60	0.75	0.66	0.59	0.53	0.62	0.56	0.51	0.59	0.53	0.49	0.44		
		2	0.84	0.75	0.68	0.81	0.73	0.66	0.61	0.69	0.63	0.58	0.65	0.60	0.56	0.51		
		2.5	0.87	0.79	0.73	0.84	0.77	0.71	0.66	0.73	0.68	0.63	0.69	0.64	0.61	0.55		
		3	0.89	0.83	0.77	0.87	0.80	0.75	0.70	0.76	0.71	0.67	0.71	0.68	0.64	0.59		
光源形式 CE810DE-C24A		4	0.93	0.87	0.82	0.90	0.85	0.80	0.76	0.80	0.76	0.73	0.76	0.72	0.69	0.64		
		5	0.95	0.90	0.86	0.92	0.88	0.84	0.80	0.83	0.80	0.77	0.78	0.76	0.73	0.67		
器具光束 9,260 lm		7	0.98	0.94	0.91	0.95	0.92	0.89	0.86	0.87	0.84	0.82	0.82	0.80	0.78	0.72		
		10	1.00	0.97	0.95	0.97	0.95	0.93	0.90	0.90	0.88	0.86	0.85	0.84	0.82	0.76		
器具効率 Ft= 100%		単位照度分布 (初期値)																
上方光束 Fu= 13.2%																		
下方光束 Fd= 86.8%																		
最大取付間隔																		
A-A 1.30 H																		
B-B 1.26 H																		
保守率	良	0.86																
	中	0.81																
	否	0.72																
光度 (cd/1000 lm)																		
	A-0	B-B	C-0	A'-0	C'-0													
0	248	248	248	248	248													
10	279	246	267	207	216													
20	308	231	281	160	179													
30	322	209	286	107	135													
40	327	179	278	66	91													
50	322	144	263	25	49													
60	308	107	238		14													
70	281	67	210															
80	243	26	173															
90	207	3	134															
100	157	3	89															
110	107	2	55															
120	69	1	26															
130	35	1	13															
140	17	1	7															
150	7	1	4															
160	4	1	2															
170	4	2	2															
180																		

配光曲線 (cd/1000 lm)		180		150		120		90		60		30		0	
350.0		300.0		250.0		200.0		150.0		100.0		50.0		0.0	
150		120		90		60		30		0		30		60	
90		60		30		0		30		60		90		120	
60		30		0		30		60		90		120		150	
30		0		30		60		90		120		150		180	
0		30		60		90		120		150		180			
A		B		C-C'											
—		- - -		- · -											

単体照度分布(初期値)

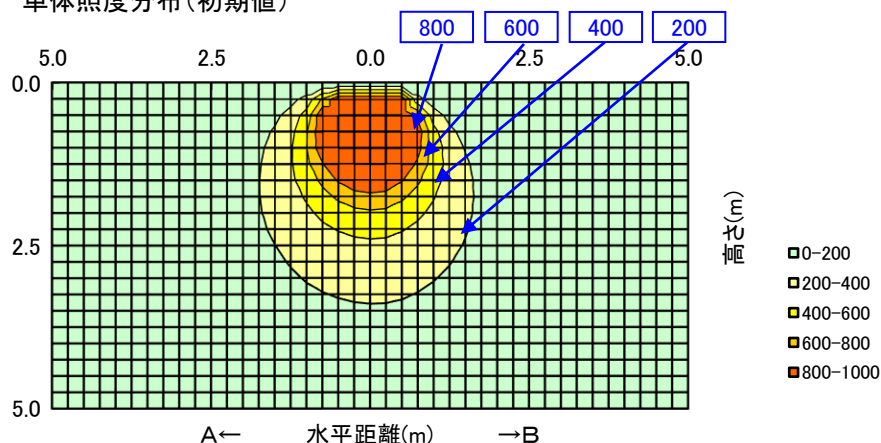

配光曲線
(cd/1000 lm)

