


日立照明器具 照明特性

名称: 交換形LED ウォールウォッシュ形		天井 壁 床	80%			70%				50%			30%			0%				
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
形式: NC8D		室指数	固有照明率 S/H=1.0																	
			10%																	
＜備考＞		0.6	0.53	0.41	0.33	0.51	0.40	0.32	0.27	0.37	0.31	0.26	0.35	0.29	0.25	0.22				
		0.8	0.62	0.50	0.42	0.60	0.48	0.41	0.35	0.46	0.39	0.34	0.43	0.37	0.33	0.29				
姿図 		1	0.68	0.56	0.48	0.65	0.55	0.47	0.41	0.52	0.45	0.40	0.49	0.43	0.38	0.34				
		1.25	0.74	0.63	0.55	0.71	0.61	0.53	0.48	0.57	0.51	0.46	0.54	0.49	0.44	0.40				
		1.5	0.78	0.68	0.60	0.75	0.66	0.59	0.53	0.62	0.56	0.51	0.59	0.53	0.49	0.44				
		2	0.84	0.75	0.68	0.81	0.73	0.66	0.61	0.69	0.63	0.58	0.65	0.60	0.56	0.51				
		2.5	0.87	0.79	0.73	0.84	0.77	0.71	0.66	0.73	0.68	0.63	0.69	0.64	0.61	0.55				
		3	0.89	0.83	0.77	0.87	0.80	0.75	0.70	0.76	0.71	0.67	0.71	0.68	0.64	0.59				
光源形式 CE814DE-C24A		4	0.93	0.87	0.82	0.90	0.85	0.80	0.76	0.80	0.76	0.73	0.76	0.72	0.69	0.64				
		5	0.95	0.90	0.86	0.92	0.88	0.84	0.80	0.83	0.80	0.77	0.78	0.76	0.73	0.67				
器具光束 12,960 lm		7	0.98	0.94	0.91	0.95	0.92	0.89	0.86	0.87	0.84	0.82	0.82	0.80	0.78	0.72				
		10	1.00	0.97	0.95	0.97	0.95	0.93	0.90	0.90	0.88	0.86	0.85	0.84	0.82	0.76				
器具効率 Ft= 100%		単位照度分布 (初期値) <div>800 600 400 200</div> <div>5.0 2.5 0.0 2.5 5.0</div> <div>0.0 2.5 5.0</div> <div>単位照度分布 (初期値)</div> <div>0-200 200-400 400-600 600-800 800-1000</div>																		
上方光束 Fu= 13.2%																				
下方光束 Fd= 86.8%																				
最大取付間隔		単位照度分布 (初期値) <div>800 600 400 200</div> <div>5.0 2.5 0.0 2.5 5.0</div> <div>0.0 2.5 5.0</div> <div>単位照度分布 (初期値)</div> <div>0-200 200-400 400-600 600-800 800-1000</div>																		
A-A 1.30 H																				
B-B 1.26 H																				
保守率	良	0.86	単位照度分布 (初期値) <div>800 600 400 200</div> <div>5.0 2.5 0.0 2.5 5.0</div> <div>0.0 2.5 5.0</div> <div>単位照度分布 (初期値)</div> <div>0-200 200-400 400-600 600-800 800-1000</div>																	
	中	0.81																		
	否	0.72																		
光度 (cd/1000 lm)		単位照度分布 (初期値) <div>800 600 400 200</div> <div>5.0 2.5 0.0 2.5 5.0</div> <div>0.0 2.5 5.0</div> <div>単位照度分布 (初期値)</div> <div>0-200 200-400 400-600 600-800 800-1000</div>																		
A-0	B-B																C-0	A'-0	C'-0	
0	248																248	248	248	248
10	279																246	267	207	216
20	308	231	281	160	179															
30	322	209	286	107	135															
40	327	179	278	66	91															
50	322	144	263	25	49															
60	308	107	238		14															
70	281	67	210																	
80	243	26	173																	
90	207	3	134																	
100	157	3	89																	
110	107	2	55																	
120	69	1	26																	
130	35	1	13																	
140	17	1	7																	
150	7	1	4																	
160	4	1	2																	
170	4	2	2																	
180																				

配光曲線 (cd/1000 lm)					
<div>180 150 120 90 60 30 0</div> <div>350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0</div> <div>0 30 60 90 120 150 180</div> <div>配光曲線 (cd/1000 lm)</div> <div>A B C-C'</div>					

単体照度分布(初期値)

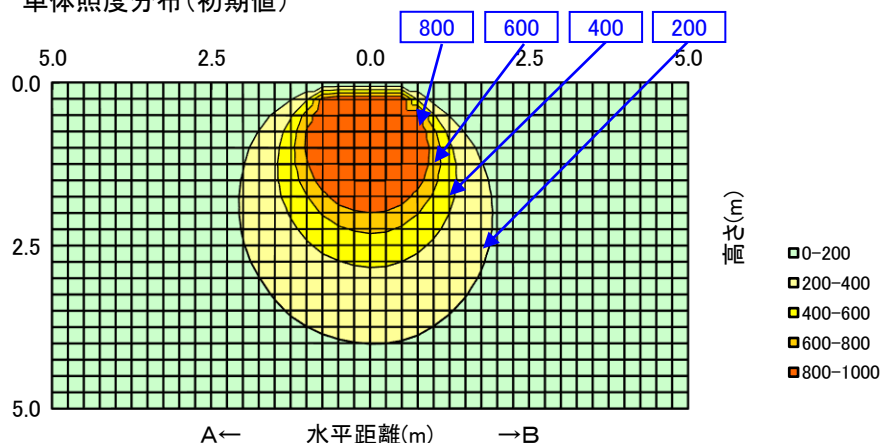

配光曲線
(cd/1000 lm)

