


日立照明器具 照明特性

名称: 交換形LED ウォールウォッシュ形	天井	80%				70%				50%			30%			0%				
	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%					
	床	10%														0%				
形式: NC8D	室指数	固有照明率 S/H=1.0																		
＜備考＞	0.6	0.53	0.41	0.33	0.51	0.40	0.32	0.27	0.37	0.31	0.26	0.35	0.29	0.25	0.22					
	0.8	0.62	0.50	0.42	0.60	0.48	0.41	0.35	0.46	0.39	0.34	0.43	0.37	0.33	0.29					
姿図 	1	0.68	0.56	0.48	0.65	0.55	0.47	0.41	0.52	0.45	0.40	0.49	0.43	0.38	0.34					
	1.25	0.74	0.63	0.55	0.71	0.61	0.53	0.48	0.57	0.51	0.46	0.54	0.49	0.44	0.40					
	1.5	0.78	0.68	0.60	0.75	0.66	0.59	0.53	0.62	0.56	0.51	0.59	0.53	0.49	0.44					
	2	0.84	0.75	0.68	0.81	0.73	0.66	0.61	0.69	0.63	0.58	0.65	0.60	0.56	0.51					
	2.5	0.87	0.79	0.73	0.84	0.77	0.71	0.66	0.73	0.68	0.63	0.69	0.64	0.61	0.55					
	3	0.89	0.83	0.77	0.87	0.80	0.75	0.70	0.76	0.71	0.67	0.71	0.68	0.64	0.59					
光源形式 CE814WWE-X24A	4	0.93	0.87	0.82	0.90	0.85	0.80	0.76	0.80	0.76	0.73	0.76	0.72	0.69	0.64					
	5	0.95	0.90	0.86	0.92	0.88	0.84	0.80	0.83	0.80	0.77	0.78	0.76	0.73	0.67					
器具光束 13,210 lm	7	0.98	0.94	0.91	0.95	0.92	0.89	0.86	0.87	0.84	0.82	0.82	0.80	0.78	0.72					
	10	1.00	0.97	0.95	0.97	0.95	0.93	0.90	0.90	0.88	0.86	0.85	0.84	0.82	0.76					
器具効率 Ft= 100%		<div>単体照度分布 (初期値)</div> <div>0-200 200-400 400-600 600-800 800-1000</div>																		
上方光束 Fu= 13.2%																				
下方光束 Fd= 86.8%																				
最大取付間隔		<div>配光曲線</div> <div>(cd/1000 lm)</div> <div>0-200 200-400 400-600 600-800 800-1000</div>																		
A-A 1.30 H																				
B-B 1.26 H																				
保守率	良	0.86	<div>配光曲線</div> <div>(cd/1000 lm)</div> <div>0-200 200-400 400-600 600-800 800-1000</div>																	
	中	0.81																		
	否	0.72																		
光度 (cd/1000 lm)		<div>配光曲線</div> <div>(cd/1000 lm)</div> <div>0-200 200-400 400-600 600-800 800-1000</div>																		
	A-0																B-B	C-0	A'-0	C'-0
0	248																248	248	248	248
10	279																246	267	207	216
20	308																231	281	160	179
30	322																209	286	107	135
40	327																179	278	66	91
50	322																144	263	25	49
60	308																107	238		14
70	281																67	210		
80	243																26	173		
90	207																3	134		
100	157																3	89		
110	107																2	55		
120	69																1	26		
130	35																1	13		
140	17																1	7		
150	7																1	4		
160	4	1	2																	
170	4	2	2																	
180																				

単体照度分布(初期値)

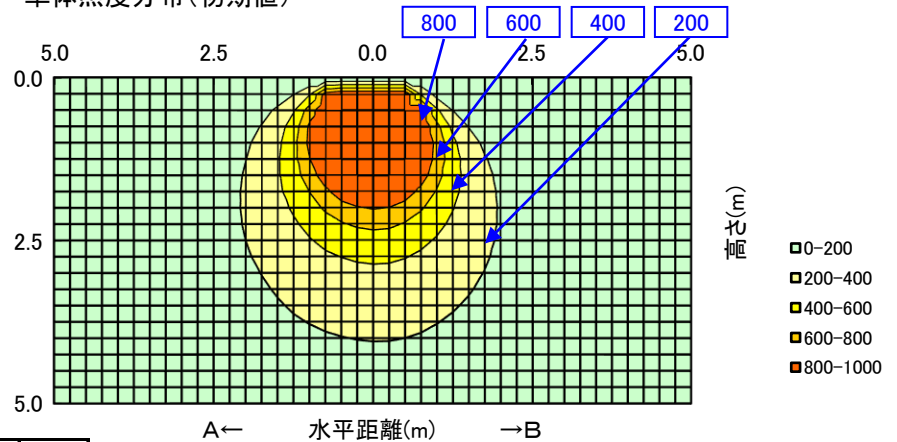

配光曲線
(cd/1000 lm)

