
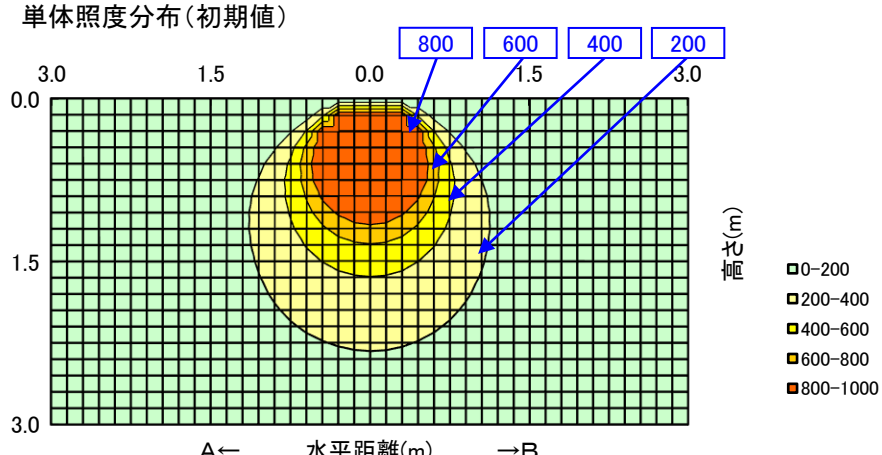
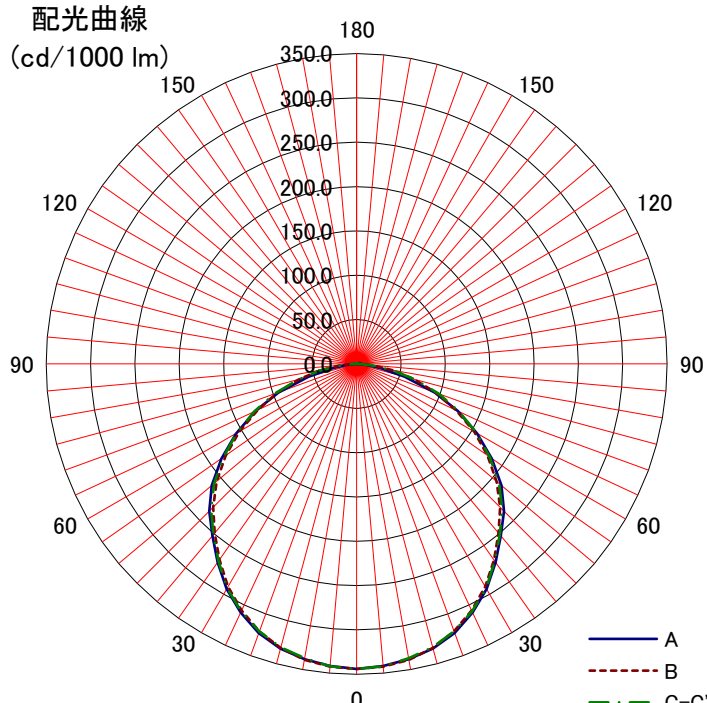


日立照明器具 照明特性

名称: 交換形LED笠付形	反射率	天井	80%				70%				50%			30%			0%													
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%														
		床	10%														0%													
形式: PC2B1	室指数	固有照明率 S/H=1.0																												
〈備考〉	0.6	0.58	0.46	0.38	0.57	0.46	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31															
	0.8	0.68	0.56	0.49	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40															
姿図 	1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47															
	1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54															
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60															
	2	0.90	0.83	0.77	0.88	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.67															
	2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.72															
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.81	0.79	0.76															
光源形式	4	0.99	0.94	0.90	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81															
CE203NE-N14A	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.91	0.89	0.87	0.84															
器具光束	7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89															
3,140 lm	10	1.05	1.03	1.02	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.97	0.96	0.95	0.92															
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> 																												
上方光束 Fu= 0.5%																														
下方光束 Fd= 99.5%																														
最大取付間隔																														
A-A		1.28	H																											
B-B		1.26	H																											
保守率	良	0.86																												
	中	0.81																												
	否	0.72																												
光度 (cd/1000 lm)		<div>配光曲線</div> <div>(cd/1000 lm)</div> 																												
	A-0															B-B	C-0	A'-0	C'-0											
0	344	344	344																											
10	338	339	337																											
20	323	321	321																											
30	293	290	292																											
40	253	249	251																											
50	213	206	210																											
60	157	153	156																											
70	94	95	99																											
80	28	43	41																											
90		5	1																											
100		5	1																											
110		3	1																											
120		2	1																											
130																														
140																														
150																														
160																														
170																														
180																														