
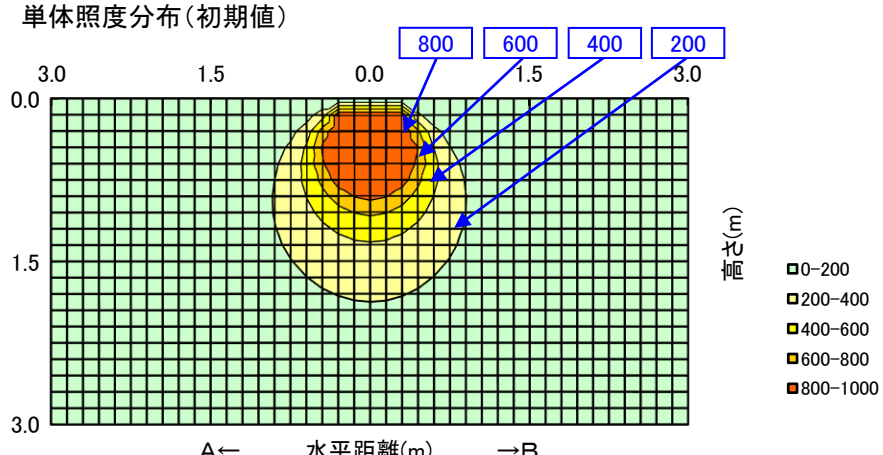
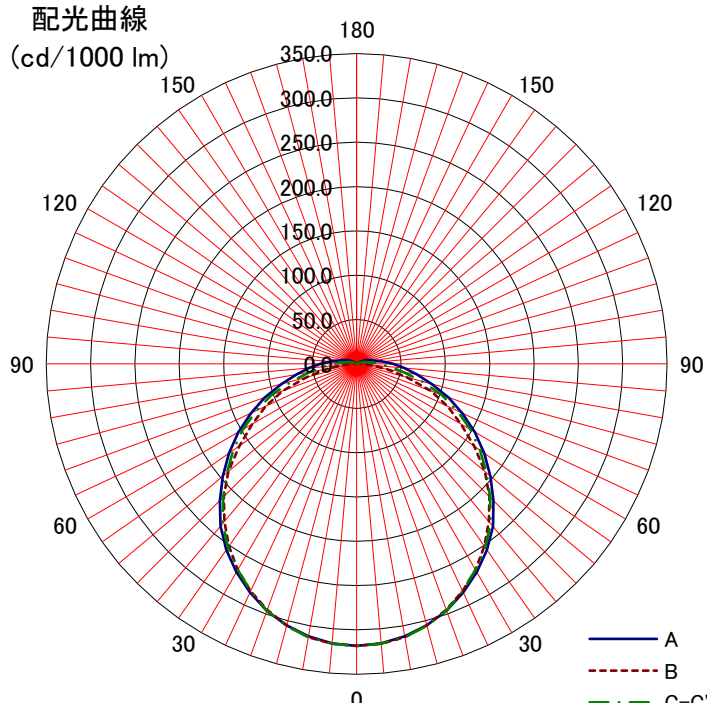


# 日立照明器具 照明特性

名称: 交換形LEDトラフ形	天井	80%				70%				50%			30%			0%															
	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																
	床	10%														0%															
形式: PC4A1	室指数	固有照明率 S/H=1.0																													
＜備考＞	0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28																
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37																
姿図 	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43																
	1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50																
	1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55																
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63																
	2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68																
	3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71																
光源形式	4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76																
CE402NE-N14A	5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80																
器具光束	7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84																
2,200 lm	10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88																
器具効率 Ft= 100%		単体照度分布(初期値) 																													
上方光束 Fu= 3.5%																															
下方光束 Fd= 96.5%																															
最大取付間隔		配光曲線 (cd/1000 lm) 																													
A-A 1.28 H																															
B-B 1.26 H																															
保守率	良	0.88																													
	中	0.86																													
	否	0.81																													
光度 (cd/1000 lm)		A-0	B-B	C-0	A'-0	C'-0																									
	0	318	318	318																											
	10	312	313	313																											
	20	296	295	296																											
	30	271	268	268																											
	40	239	232	235																											
	50	197	189	191																											
	60	154	136	148																											
	70	110	89	102																											
	80	69	35	54																											
	90	41	5	25																											
	100	21	5	12																											
	110	13	3	6																											
	120	5	2	1																											
	130																														
	140																														
	150																														
	160																														
	170																														
	180																														