
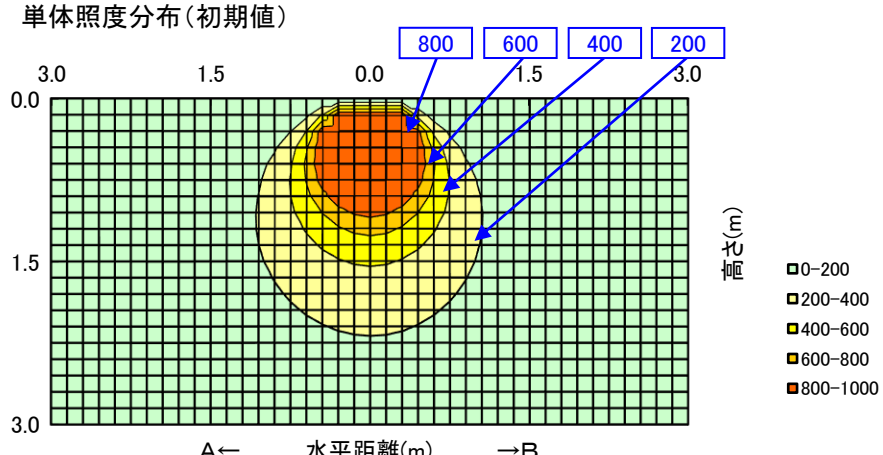
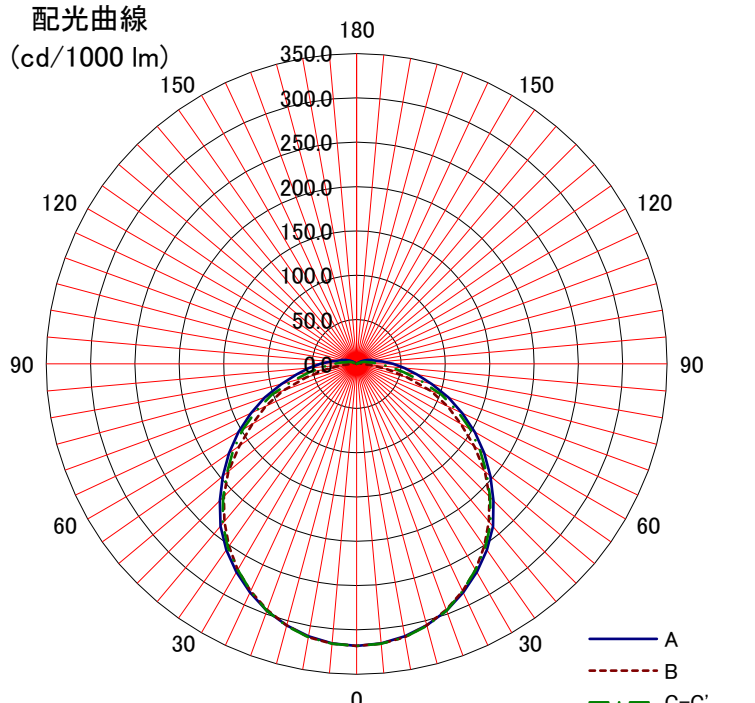


日立照明器具 照明特性

名称: 交換形LEDトラフ形		反射率	天井	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
形式: PC4A1		室指数	床	10%													0%		
			固有照明率 S/H=1.0																
＜備考＞		0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28			
		0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37			
姿図		1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43			
		1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50			
		1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55			
		2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63			
		2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68			
		3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71			
光源形式		4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76			
CE403NF-N14A		5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80			
器具光束		7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84			
3,000 lm		10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88			
器具効率 Ft= 100%			<div>単体照度分布(初期値)</div> 																
上方光束 Fu= 3.5%																			
下方光束 Fd= 96.5%																			
最大取付間隔																			
A-A 1.28 H																			
B-B 1.26 H																			
保守率	良	0.88																	
	中	0.86																	
	否	0.81																	
光度 (cd/1000 lm)			<div>配光曲線 (cd/1000 lm)</div> 																
	A-0	B-B															C-0	A'-0	C'-0
0	318	318															318		
10	312	313															313		
20	296	295															296		
30	271	268															268		
40	239	232															235		
50	197	189															191		
60	154	136															148		
70	110	89															102		
80	69	35															54		
90	41	5															25		
100	21	5															12		
110	13	3															6		
120	5	2															1		
130																			
140																			
150																			
160																			
170																			
180																			