

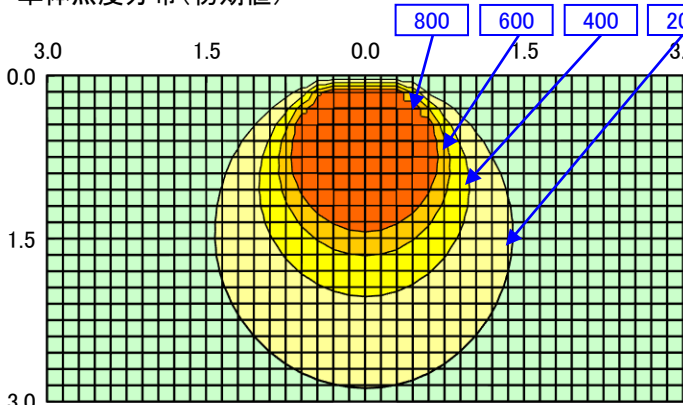
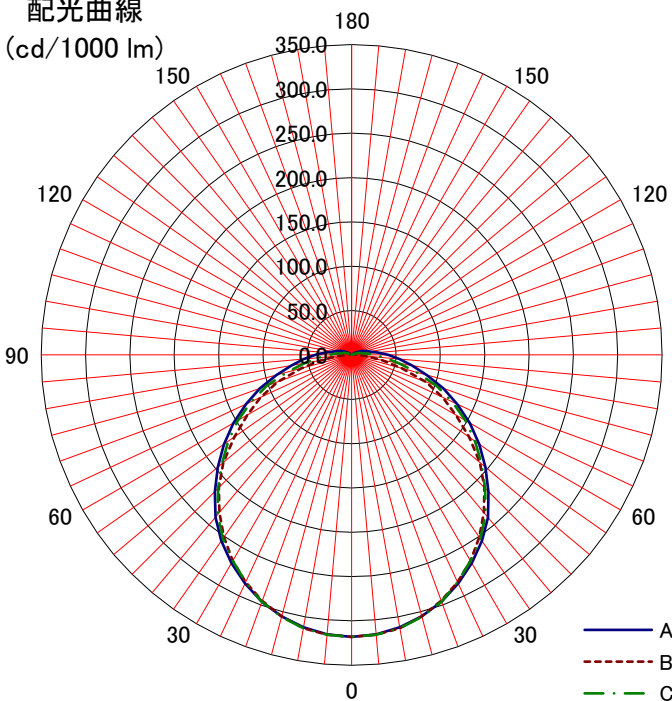
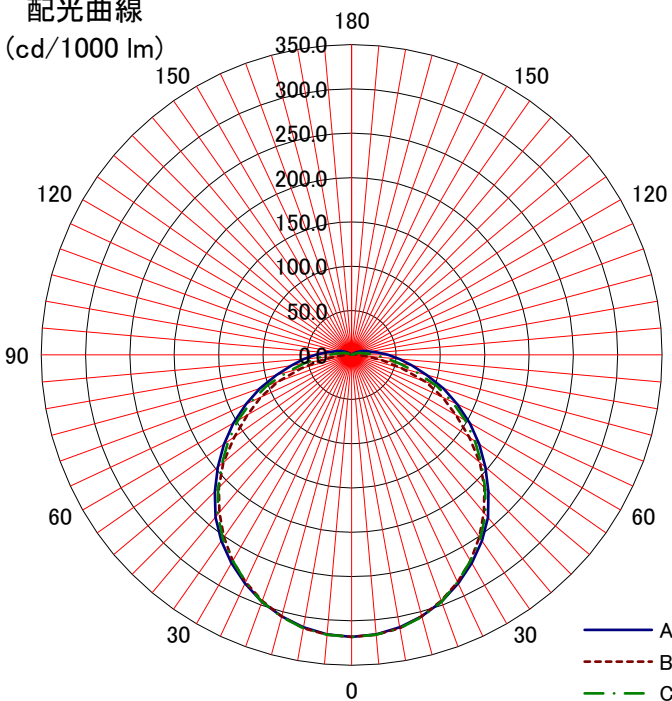
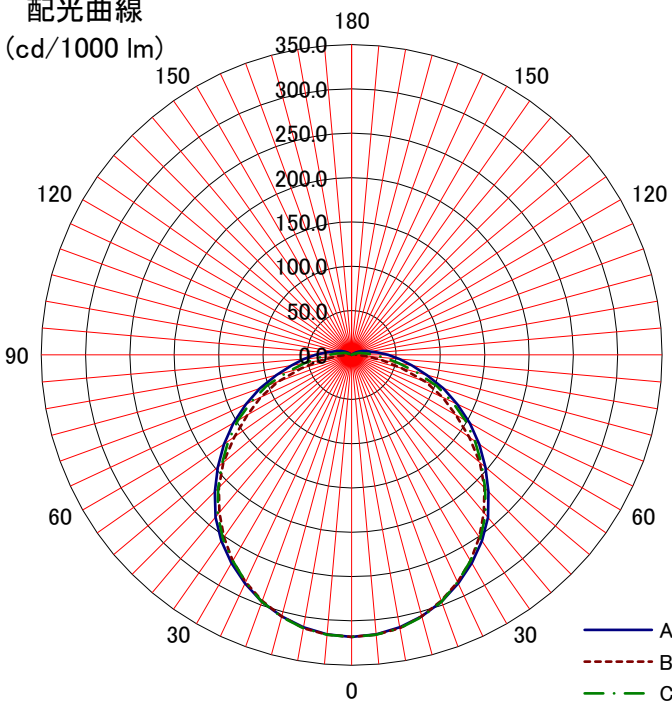


日立照明器具 照明特性

名称: 交換形LEDトラフ形	反射率	天井	80%			70%				50%			30%			0%		
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
	床	10%														0%		
形式: PC4A1	室指数	固有照明率 S/H=1.0																
〈備考〉	0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28			
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37			
姿図 	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43			
	1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50			
	1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55			
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63			
	2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68			
	3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71			
光源形式	4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76			
CE405NE-C14A	5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80			
器具光束	7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84			
5,200 lm	10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88			
器具効率 Ft= 100%		単体照度分布 (初期値) 																
上方光束 Fu= 3.5%																		
下方光束 Fd= 96.5%																		
最大取付間隔		A← 水平距離(m) →B 																
A-A 1.28 H																		
B-B 1.26 H																		
保守率	良 0.88	配光曲線 (cd/1000 lm) 																
中 0.86																		
否 0.81																		
光度 (cd/1000 lm)		A← 水平距離(m) →B 																
A-0	B-B															C-0	A'-0	C'-0
0	318															318	318	
10	312															313	313	
20	296	295	296															
30	271	268	268															
40	239	232	235															
50	197	189	191															
60	154	136	148															
70	110	89	102															
80	69	35	54															
90	41	5	25															
100	21	5	12															
110	13	3	6															
120	5	2	1															
130																		
140																		
150																		
160																		
170																		
180																		

単体照度分布(初期値)

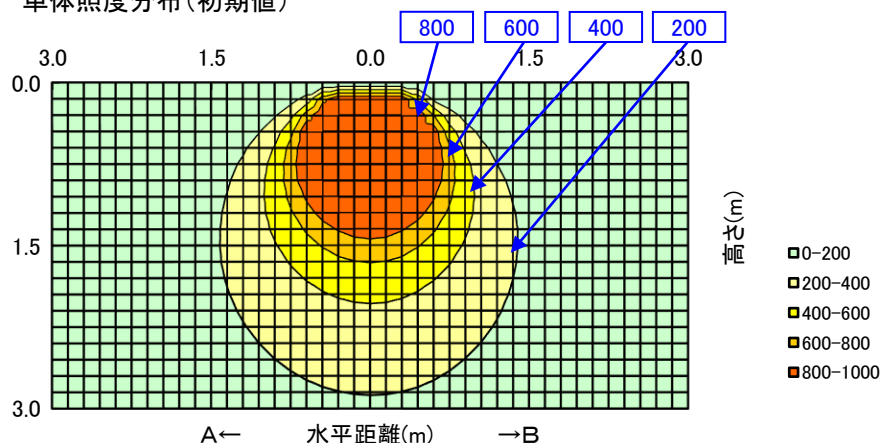

配光曲線
(cd/1000 lm)

