
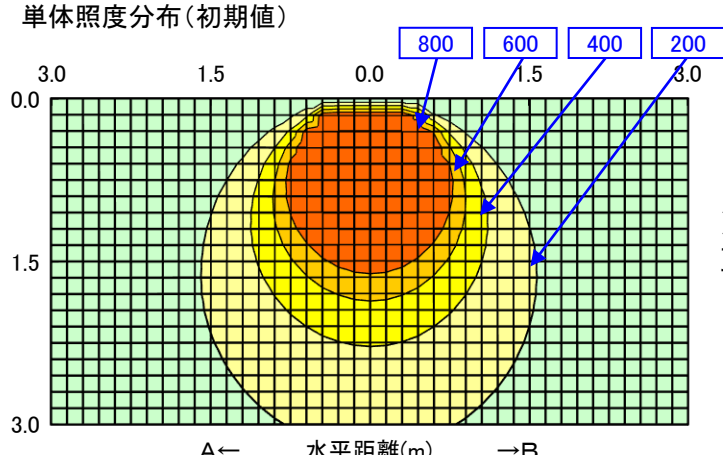
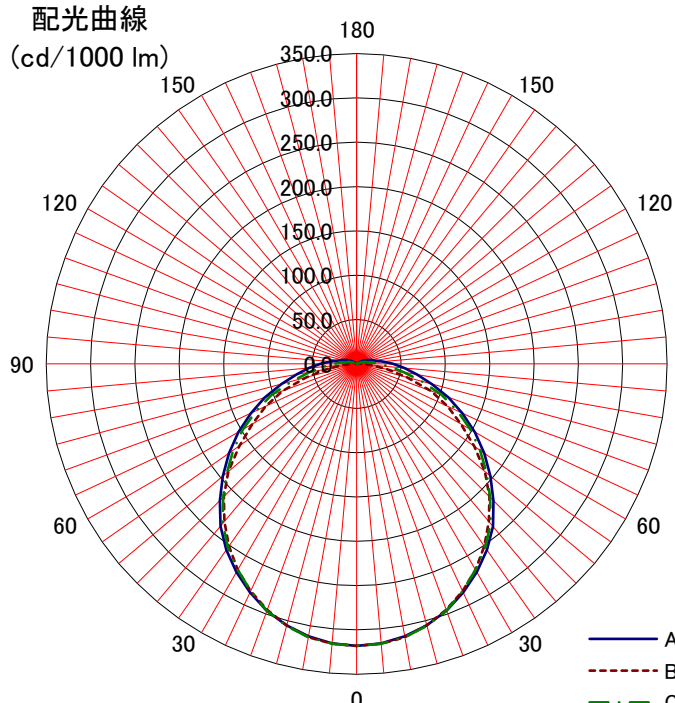


日立照明器具 照明特性

名称: 交換形LEDトラフ形	反射率	天井	80%			70%				50%			30%			0%													
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%													
	床	10%														0%													
形式: PC4A1	室指数	固有照明率 S/H=1.0																											
＜備考＞	0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28														
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37														
姿図 	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43														
	1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50														
	1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55														
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63														
	2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68														
	3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71														
光源形式	4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76														
CE407LE-N14A	5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80														
器具光束	7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84														
6,560 lm	10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88														
器具効率 Ft= 100%		単体照度分布(初期値) 																											
上方光束 Fu= 3.5%																													
下方光束 Fd= 96.5%																													
最大取付間隔		(E)lx ■0-200 ■200-400 ■400-600 ■600-800 ■800-1000																											
A-A 1.28 H																													
B-B 1.26 H																													
保守率	良	0.88	配光曲線 (cd/1000 lm) 																										
	中	0.86																											
	否	0.81																											
光度 (cd/1000 lm)																													
	A-0	B-B															C-0	A'-0	C'-0										
0	318	318															318												
10	312	313															313												
20	296	295															296												
30	271	268															268												
40	239	232															235												
50	197	189	191																										
60	154	136	148																										
70	110	89	102																										
80	69	35	54																										
90	41	5	25																										
100	21	5	12																										
110	13	3	6																										
120	5	2	1																										
130																													
140																													
150																													
160																													
170																													
180																													