
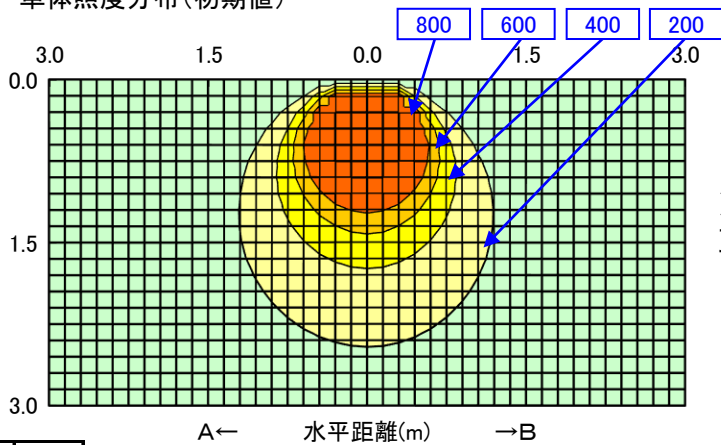
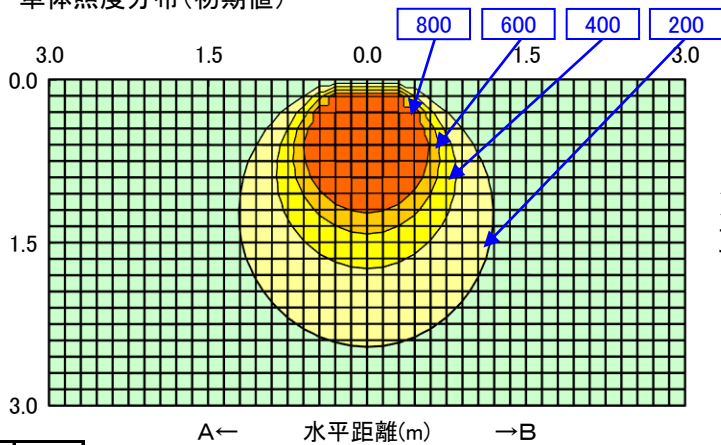


# 日立照明器具 照明特性

名称: 人感センサー付 交換形ベース器具 (トランプ形)	天井	80%				70%				50%				30%				0%		
	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%					
	床	10%														0%				
	室指数	固有照明率 S/H=1.0																		
形式: PC4A1SL	反射率	0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28				
<div>&lt;備考&gt;</div> <div>姿図</div> <div></div>		0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37				
	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43					
	1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50					
	1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55					
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63					
	2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68					
	3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71					
光源形式 CE403NE-X14A	4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76					
器具光束 3,800 lm	5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80					
	7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84					
	10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88					
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> <div></div> <div>水平距離(m)</div>																		
上方光束 Fu= 3.5%																				
下方光束 Fd= 96.5%																				
最大取付間隔		<div>配光曲線</div> <div>(cd/1000 lm)</div> <div></div> <div>A ← 水平距離(m) → B</div>																		
A-A 1.28 H																				
B-B 1.26 H																				
保守率	良	0.88	<div>0-200</div> <div>200-400</div> <div>400-600</div> <div>600-800</div> <div>800-1000</div>																	
	中	0.86																		
	否	0.81																		
光度 (cd/1000 lm)		<div>0-200</div> <div>200-400</div> <div>400-600</div> <div>600-800</div> <div>800-1000</div>																		
	A-0																B-B	C-0	A'-0	C'-0
0	318																318	318		
10	312																313	313		
20	296																295	296		
30	271																268	268		
40	239																232	235		
50	197																189	191		
60	154																136	148		
70	110																89	102		
80	69																35	54		
90	41																5	25		
100	21																5	12		
110	13																3	6		
120	5																2	1		
130																				
140																				
150																				
160																				
170																				
180																				