
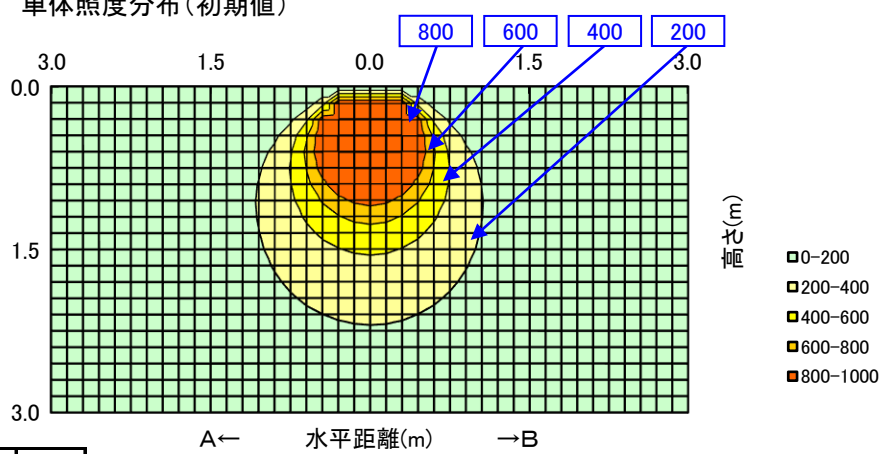
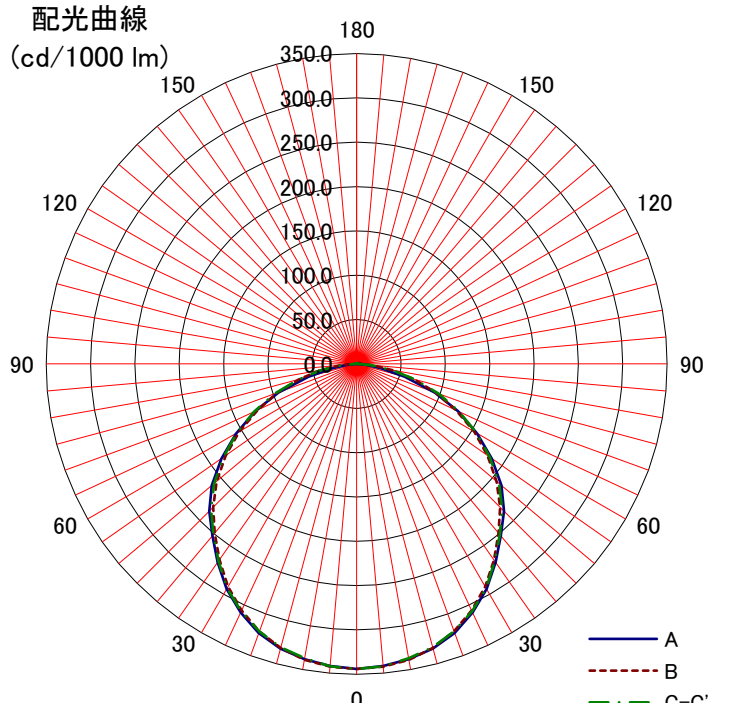


# 日立照明器具 照明特性

名称: 交換形LED笠付形		反射率	天井	80%			70%			50%			30%			0%				
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
形式: PC4B1		室指数	床	10%													0%			
			固有照明率 S/H=1.0																	
<備考>		0.6	0.58	0.46	0.38	0.57	0.46	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31				
		0.8	0.68	0.56	0.49	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40				
姿図 		1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47				
		1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54				
		1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60				
		2	0.90	0.83	0.77	0.88	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.67				
		2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.72				
		3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.81	0.79	0.76				
光源形式 CE403DF-X14A		4	0.99	0.94	0.90	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81				
		5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.91	0.89	0.87	0.84				
器具光束 2,800 lm		7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89				
		10	1.05	1.03	1.02	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.97	0.96	0.95	0.92				
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> 																		
上方光束 Fu= 0.5%																				
下方光束 Fd= 99.5%																				
最大取付間隔																				
A-A																	1.28	H		
B-B																	1.26	H		
保守率	良	0.86																		
	中	0.81																		
	否	0.72																		
光度 (cd/1000 lm)		<div>配光曲線 (cd/1000 lm)</div> 																		
	A-0																B-B	C-0	A'-0	C'-0
0	344																344	344		
10	338																339	337		
20	323																321	321		
30	293																290	292		
40	253																249	251		
50	213																206	210		
60	157																153	156		
70	94																95	99		
80	28																43	41		
90																	5	1		
100																	5	1		
110																	3	1		
120																	2	1		
130																				
140																				
150																				
160																				
170																				
180																				