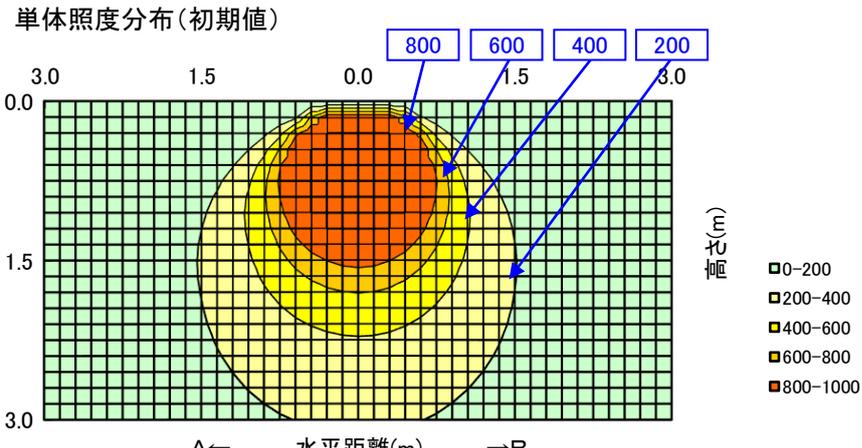
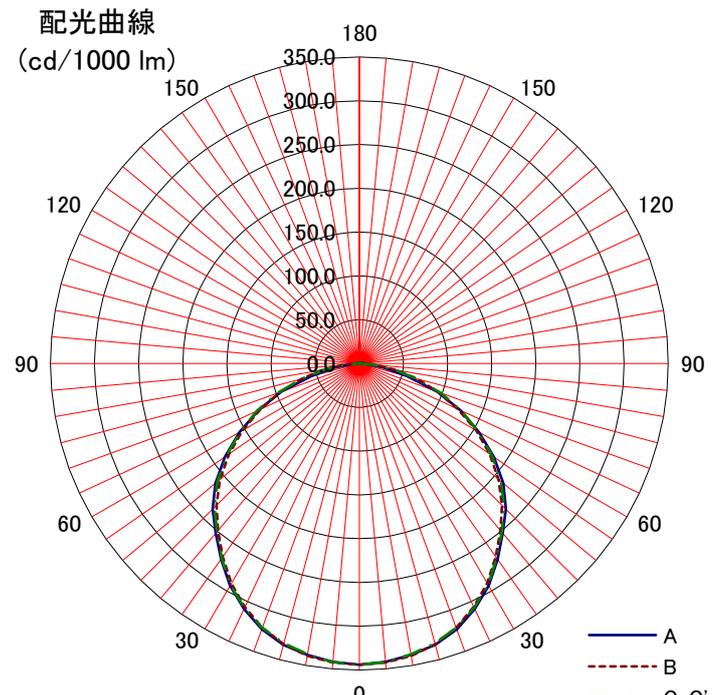


## 日立照明器具 照明特性

名称: 交換形LED笠付形	反射率	天井			80%				70%				50%				30%				0%			
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
形式: PC4B1		床	10%																				0%	
室指数	固有照明率 S/H=1.0																							
〈備考〉	0.6	0.58	0.46	0.38	0.57	0.46	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31									
	0.8	0.68	0.56	0.49	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40									
姿図 	1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47									
	1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54									
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60									
	2	0.90	0.83	0.77	0.88	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.67									
	2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.72									
光源形式	4	0.99	0.94	0.90	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81									
CE406WWG-X14A	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.91	0.89	0.87	0.84									
器具光束	7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89									
5,710 lm	10	1.05	1.03	1.02	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.97	0.96	0.95	0.92									
器具効率 Ft= 100%																								
上方光束 Fu= 0.5%																								
下方光束 Fd= 99.5%																								
最大取付間隔																								
A-A	1.28	H																						
B-B	1.26	H																						
保守率	良	0.86																						
	中	0.81																						
	否	0.72																						
光度 (cd/1000 lm)																								
	A-0	B-B	C-0	A'-0	C'-0																			
0	344	344	344																					
10	338	339	337																					
20	323	321	321																					
30	293	290	292																					
40	253	249	251																					
50	213	206	210																					
60	157	153	156																					
70	94	95	99																					
80	28	43	41																					
90		5	1																					
100		5	1																					
110		3	1																					
120		2	1																					
130																								
140																								
150																								
160																								
170																								
180																								