
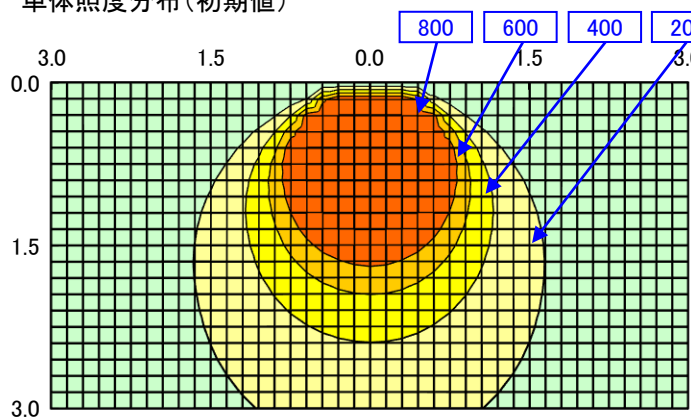


# 日立照明器具 照明特性

名称: 交換形LED笠付形	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: PC4B1	室指数	固有照明率 S/H=1.0														
＜備考＞	0.6	0.58	0.46	0.38	0.57	0.46	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31	
	0.8	0.68	0.56	0.49	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40	
姿図 	1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47	
	1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54	
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60	
	2	0.90	0.83	0.77	0.88	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.67	
	2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.72	
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.81	0.79	0.76	
光源形式	4	0.99	0.94	0.90	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81	
CE407WWE-N14A	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.91	0.89	0.87	0.84	
器具光束	7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89	
6,670 lm	10	1.05	1.03	1.02	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.97	0.96	0.95	0.92	
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div>  <div>800 600 400 200</div> <div>3.0 1.5 0.0 1.5 3.0</div> <div>0.0 1.5 3.0</div> <div>A← 水平距離(m) →B</div> <div>(m) 高さ</div> <div>0-200 200-400 400-600 600-800 800-1000</div>														
上方光束 Fu= 0.5%																
下方光束 Fd= 99.5%																
最大取付間隔																
A-A 1.28 H																
B-B 1.26 H																
保守率	良	0.86														
	中	0.81														
	否	0.72														
光度 (cd/1000 lm)																
	A-0 B-B C-0 A'-0 C'-0															
	0 344 344 344															
	10 338 339 337															
	20 323 321 321															
	30 293 290 292															
	40 253 249 251															
	50 213 206 210															
	60 157 153 156															
	70 94 95 99															
	80 28 43 41															
	90 5 1															
	100 5 1															
	110 3 1															
	120 2 1															
	130															
	140															
	150															
	160															
	170															
	180															

配光曲線 (cd/1000 lm)		180		150		120		90		60		30		0	
		350.0		300.0		250.0		200.0		150.0		100.0		50.0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120		90		60		30		0		0	
		150		120											

