
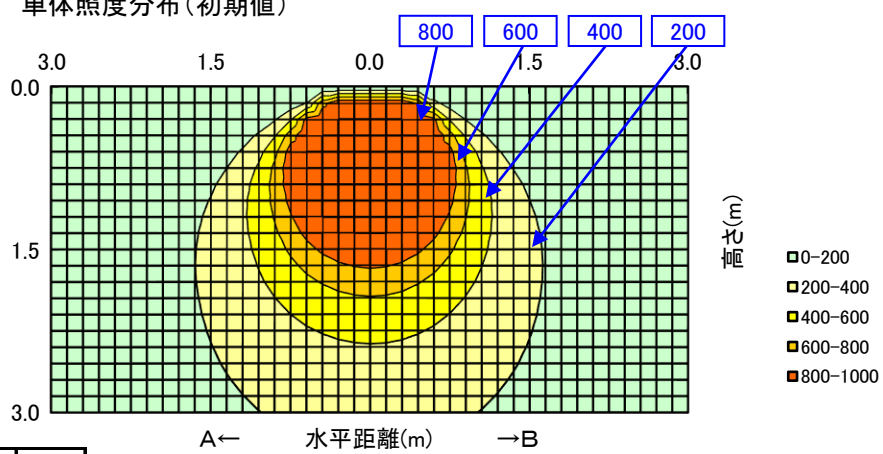
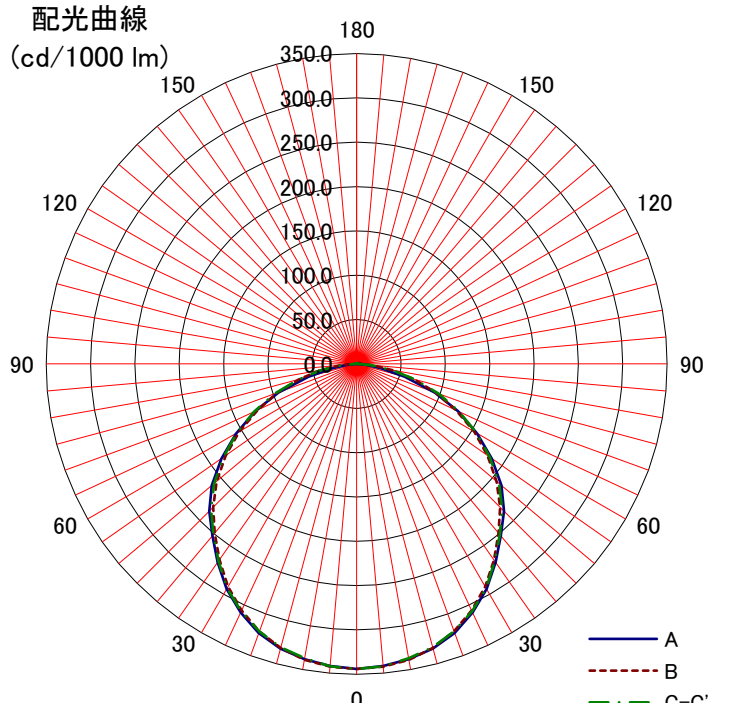
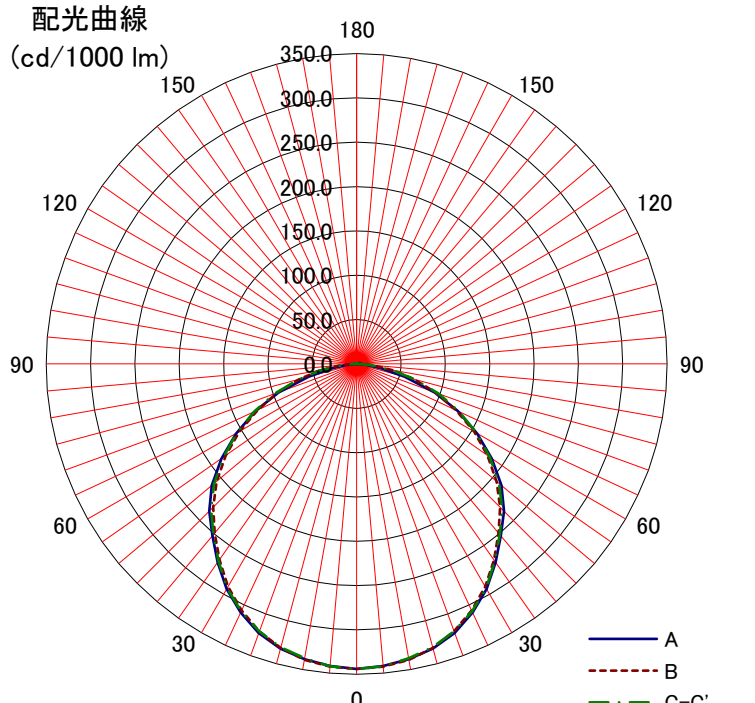


日立照明器具 照明特性

名称: 交換形LED笠付形	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
形式: PC4B1	室指数	床	10%													0%	
		固有照明率 S/H=1.0															
＜備考＞	0.6	0.58	0.46	0.38	0.57	0.46	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31		
	0.8	0.68	0.56	0.49	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40		
姿図 	1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47		
	1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54		
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60		
	2	0.90	0.83	0.77	0.88	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.67		
	2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.72		
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.81	0.79	0.76		
光源形式 CE407DE-N14A	4	0.99	0.94	0.90	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81		
	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.91	0.89	0.87	0.84		
器具光束 6,530 lm	7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89		
	10	1.05	1.03	1.02	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.97	0.96	0.95	0.92		
器具効率 Ft= 100%		単体照度分布(初期値) 															
上方光束 Fu= 0.5%																	
下方光束 Fd= 99.5%																	
最大取付間隔		光度 (cd/1000 lm) 															
A-A 1.28 H																	
B-B 1.26 H																	
保守率	良	0.86	配光曲線 (cd/1000 lm) 														
	中	0.81															
	否	0.72															
光度 (cd/1000 lm)		A-0	B-B	C-0	A'-0	C'-0											
0		344	344	344													
10		338	339	337													
20		323	321	321													
30		293	290	292													
40		253	249	251													
50		213	206	210													
60		157	153	156													
70		94	95	99													
80		28	43	41													
90			5	1													
100			5	1													
110			3	1													
120			2	1													
130																	
140																	
150																	
160																	
170																	
180																	