
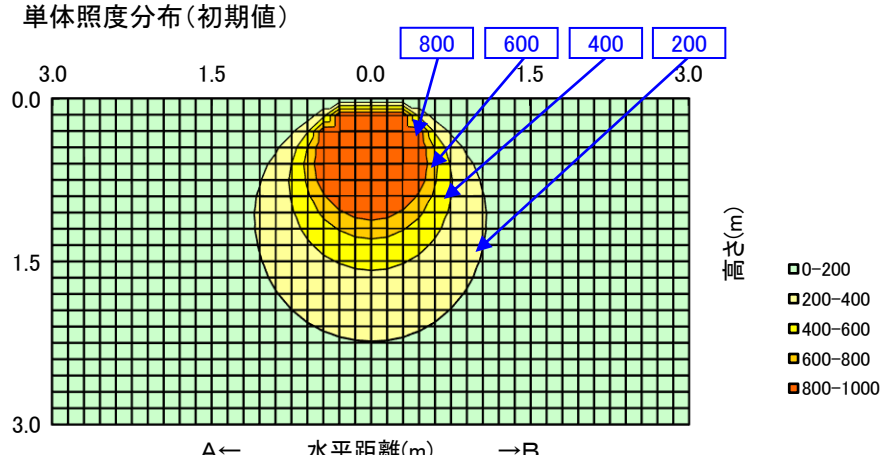
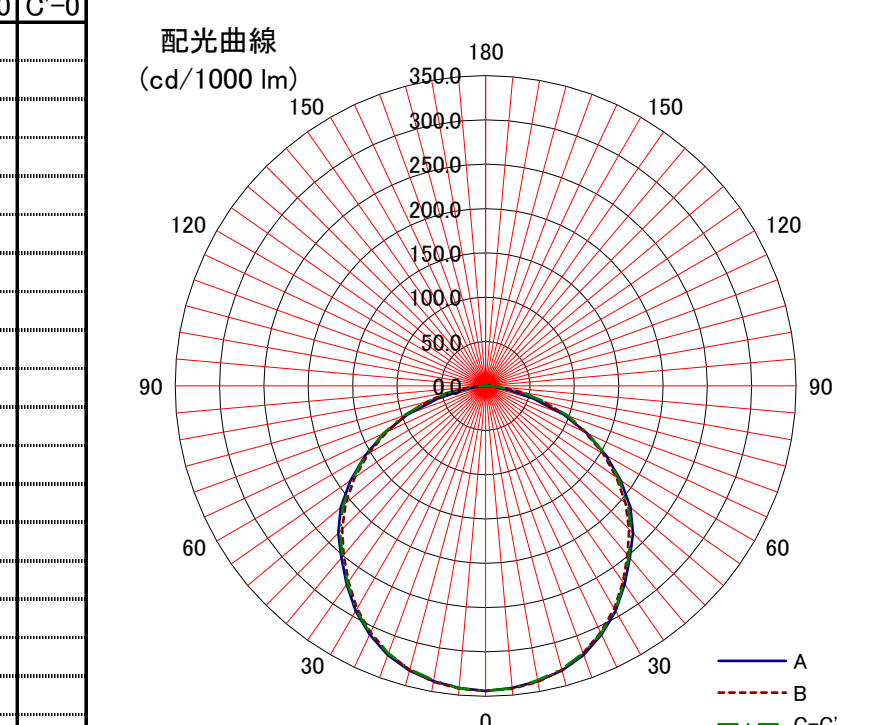
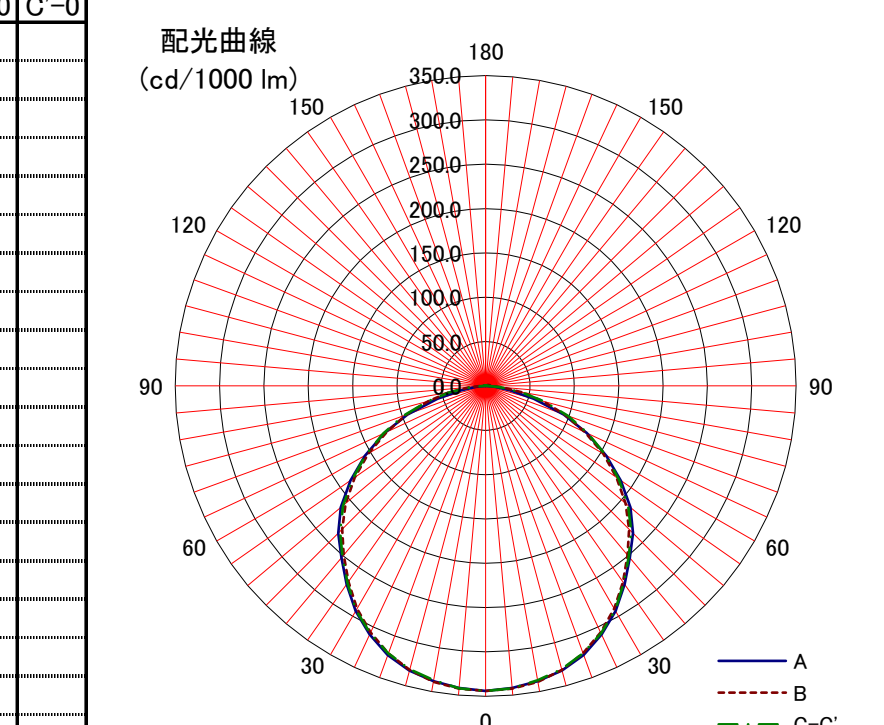
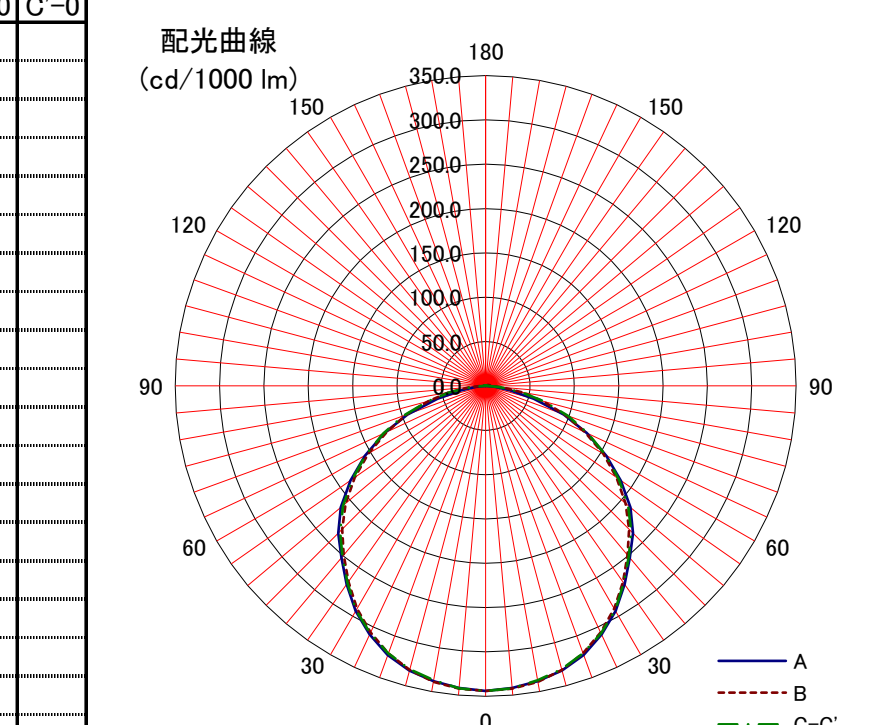


日立照明器具 照明特性

名称: 交換形LED笠付形 CP付	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%													0%	
形式: PC4B1CP	室指数	固有照明率 S/H=1.0															
<備考>	0.6	0.58	0.46	0.38	0.57	0.46	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31		
	0.8	0.68	0.56	0.49	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40		
姿図 	1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47		
	1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54		
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60		
	2	0.90	0.83	0.77	0.88	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.67		
	2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.72		
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.81	0.79	0.76		
光源形式	4	0.99	0.94	0.90	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81		
CE403WF-N14A	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.91	0.89	0.87	0.84		
器具光束	7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89		
2,910 lm	10	1.05	1.03	1.02	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.97	0.96	0.95	0.92		
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> 															
上方光束 Fu= 0.5%																	
下方光束 Fd= 99.5%																	
最大取付間隔		<div>配光曲線</div> <div>(cd/1000 lm)</div> 															
A-A 1.28 H																	
B-B 1.26 H																	
保守率	良	0.86	<div>配光曲線</div> <div>(cd/1000 lm)</div> 														
	中	0.81															
	否	0.72															
光度 (cd/1000 lm)		<div>配光曲線</div> <div>(cd/1000 lm)</div> 															
A-0 B-B C-0 A'-0 C'-0																	
0	344 344 344																
10	338 339 337																
20	323 321 321																
30	293 290 292																
40	253 249 251																
50	213 206 210																
60	157 153 156																
70	94 95 99																
80	28 43 41																
90	5 5 1																
100	5 5 1																
110	3 3 1																
120	2 1																
130																	
140																	
150																	
160																	
170																	
180																	