
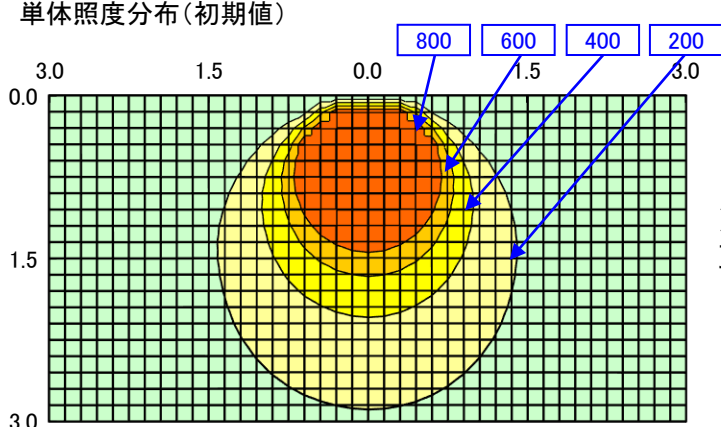
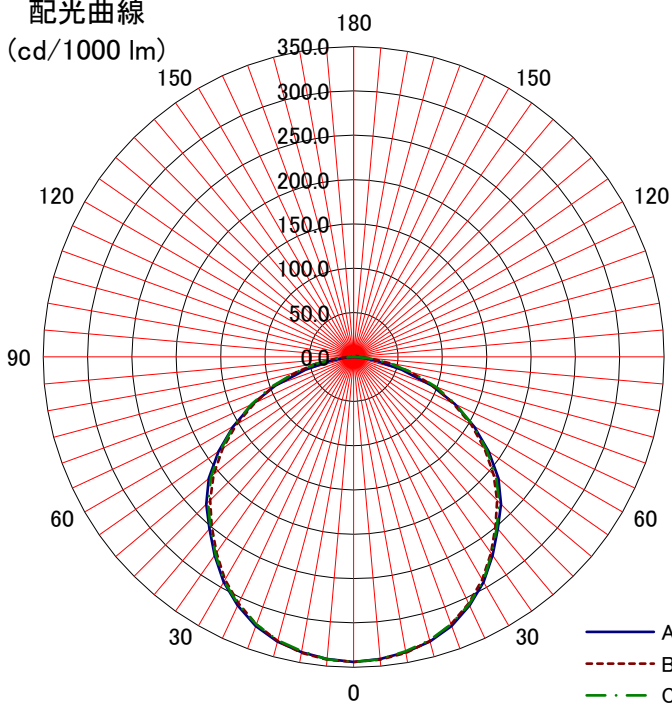
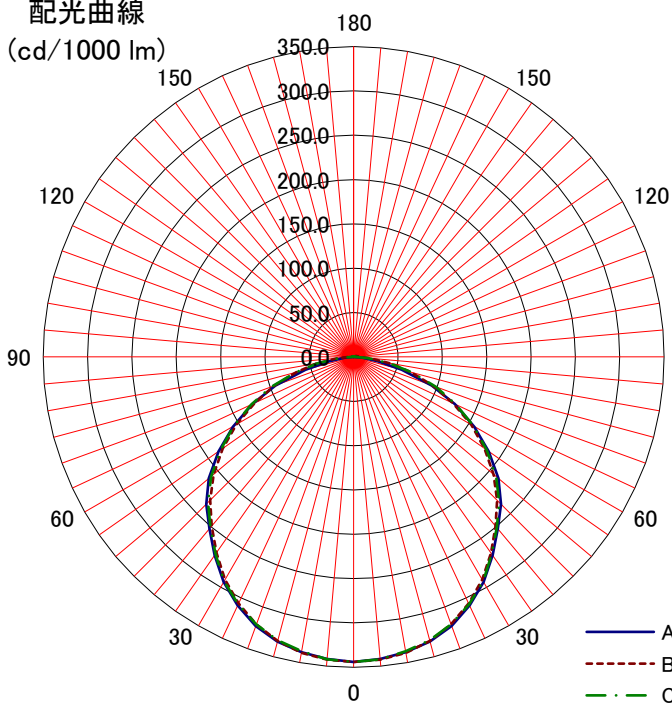


日立照明器具 照明特性

名称: 交換形LED笠付形 CP付	天井 反射率	80%			70%				50%			30%			0%					
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
形式: PC4B1CP	床	10%															0%			
		固有照明率 S/H=1.0																		
＜備考＞	室指数	0.6	0.58	0.46	0.38	0.57	0.46	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31				
		0.8	0.68	0.56	0.49	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40				
姿図 	1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47					
	1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54					
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60					
	2	0.90	0.83	0.77	0.88	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.67					
	2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.72					
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.81	0.79	0.76					
光源形式 CE405DE-N14A	4	0.99	0.94	0.90	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81					
	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.91	0.89	0.87	0.84					
器具光束 4,850 lm	7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89					
	10	1.05	1.03	1.02	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.97	0.96	0.95	0.92					
器具効率 Ft= 100%		<div>単体照度分布 (初期値)</div>  <div>0-200 200-400 400-600 600-800 800-1000</div>																		
上方光束 Fu= 0.5%																				
下方光束 Fd= 99.5%																				
最大取付間隔		<div>A← 水平距離(m) →B</div>  <div>A B C-C'</div>																		
A-A 1.28 H																				
B-B 1.26 H																				
保守率	良	0.86																		
	中	0.81																		
	否	0.72																		
光度 (cd/1000 lm)																				
	A-0																B-B	C-0	A'-0	C'-0
0	344																344	344		
10	338																339	337		
20	323																321	321		
30	293																290	292		
40	253																249	251		
50	213																206	210		
60	157																153	156		
70	94																95	99		
80	28																43	41		
90																	5	1		
100																	5	1		
110																	3	1		
120																	2	1		
130																				
140																				
150																				
160																				
170																				
180																				