
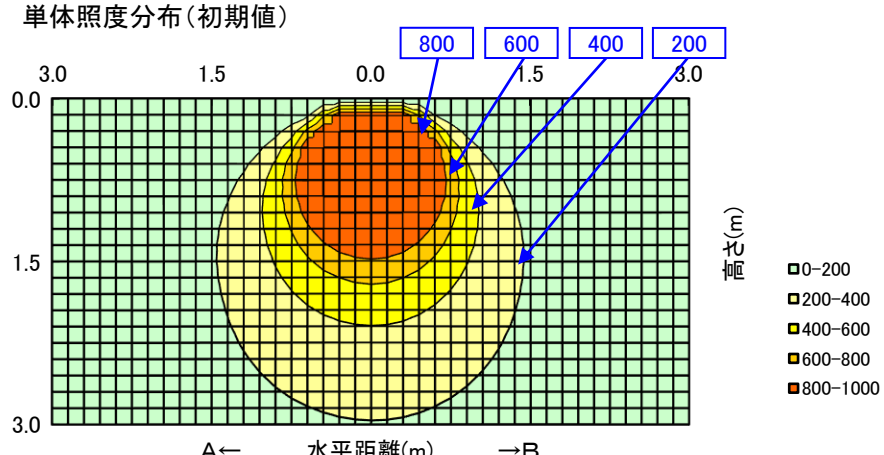
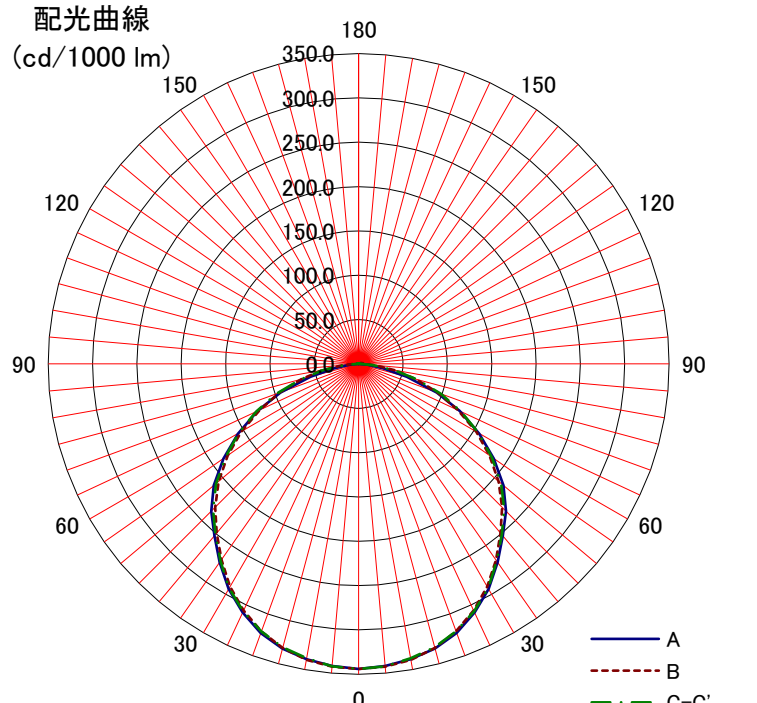


日立照明器具 照明特性

名称: 交換形LED笠付形 CP付	反射率	天井	80%			70%				50%			30%			0%													
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%													
		床	10%														0%												
形式: PC4B1CP	室指数	固有照明率 S/H=1.0																											
<備考>	0.6	0.58	0.46	0.38	0.57	0.46	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31														
	0.8	0.68	0.56	0.49	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40														
	1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47														
姿図 	1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54														
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60														
	2	0.90	0.83	0.77	0.88	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.67														
	2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.72														
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.81	0.79	0.76														
光源形式 CE405NE-X14A	4	0.99	0.94	0.90	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81														
器具光束 5,100 lm	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.91	0.89	0.87	0.84														
	7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89														
	10	1.05	1.03	1.02	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.97	0.96	0.95	0.92														
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> 																											
上方光束 Fu= 0.5%																													
下方光束 Fd= 99.5%																													
最大取付間隔																													
A-A 1.28 H																													
B-B 1.26 H																													
保守率	良	0.86																											
	中	0.81																											
	否	0.72																											
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm)																											
	A-0	B-B														C-0	A'-0	C'-0											
0	344	344														344													
10	338	339														337													
20	323	321														321													
30	293	290														292													
40	253	249														251													
50	213	206														210													
60	157	153														156													
70	94	95														99													
80	28	43														41													
90		5														1													
100		5														1													
110		3														1													
120		2														1													
130																													
140																													
150																													
160																													
170																													
180																													