
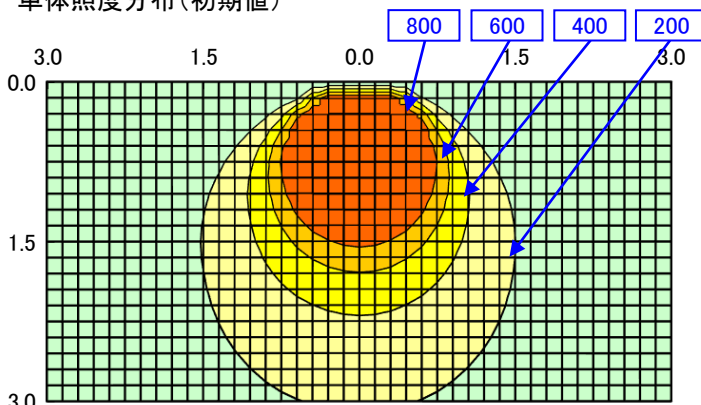







日立照明器具 照明特性

名称: 交換形LED笠付形 CP付	反射率	天井	80%			70%				50%			30%			0%													
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%													
		床	10%													0%													
形式: PC4B1CP	室指数	固有照明率 S/H=1.0																											
＜備考＞	0.6	0.58	0.46	0.38	0.57	0.46	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31														
<div>姿図</div> 	0.8	0.68	0.56	0.49	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40														
	1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47														
	1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54														
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60														
	2	0.90	0.83	0.77	0.88	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.67														
	2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.72														
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.81	0.79	0.76														
光源形式	4	0.99	0.94	0.90	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81														
CE406DG-X14A	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.91	0.89	0.87	0.84														
器具光束	7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89														
5,600 lm	10	1.05	1.03	1.02	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.97	0.96	0.95	0.92														
器具効率 Ft= 100%		<div>単体照度分布 (初期値)</div> 																											
上方光束 Fu= 0.5%																													
下方光束 Fd= 99.5%																													
最大取付間隔		<div>（m）</div> 																											
A-A 1.28 H																													
B-B 1.26 H																													
保守率	良	0.86	<div>光度 (cd/1000 lm)</div> 																										
	中	0.81																											
	否	0.72																											
		<div>配光曲線 (cd/1000 lm)</div> 																											
		<div>光度 (cd/1000 lm)</div> 																											
	A-0	B-B	C-0	A'-0	C'-0	<div>（m）</div> 																							
0	344	344	344																										
10	338	339	337																										
20	323	321	321																										
30	293	290	292																										
40	253	249	251																										
50	213	206	210																										
60	157	153	156																										
70	94	95	99																										
80	28	43	41																										
90		5	1																										
100		5	1																										
110		3	1																										
120		2	1																										
130																													
140																													
150																													
160																													
170																													
180																													