
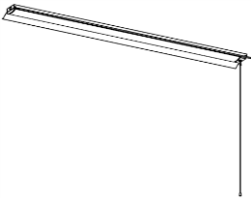


# 日立照明器具 照明特性

名称: 交換形LED笠付形 CP付	反 射 率	天井	80%				70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
形式: PC4B1CP	室指数	固有照明率 S/H=1.0															
<備考>	0.6	0.58	0.46	0.38	0.57	0.46	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31		
	0.8	0.68	0.56	0.49	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40		
姿図 	1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47		
	1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54		
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60		
	2	0.90	0.83	0.77	0.88	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.67		
	2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.72		
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.81	0.79	0.76		
光源形式 CE407DE-N14A	4	0.99	0.94	0.90	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81		
器具光束 6,530 lm	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.91	0.89	0.87	0.84		
	7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89		
	10	1.05	1.03	1.02	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.97	0.96	0.95	0.92		

器具効率 Ft= 100%					
上方光束 Fu= 0.5%					
下方光束 Fd= 99.5%					
最大取付間隔					
A-A		1.28 H			
B-B		1.26 H			
保守率	良	0.86			
	中	0.81			
	否	0.72			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	344	344	344		
10	338	339	337		
20	323	321	321		
30	293	290	292		
40	253	249	251		
50	213	206	210		
60	157	153	156		
70	94	95	99		
80	28	43	41		
90		5	1		
100		5	1		
110		3	1		
120		2	1		
130					
140					
150					
160					
170					
180					

単体照度分布(初期値)

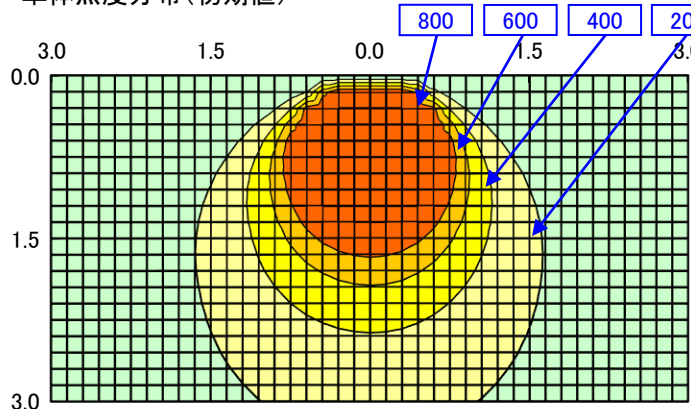

800 600 400 200

3.0 1.5 0.0 1.5 3.0


0.0 1.5 3.0

A← 水平距離(m) →B

(m) 高さ

0-200  
200-400  
400-600  
600-800  
800-1000

配光曲線  
(cd/1000 lm)

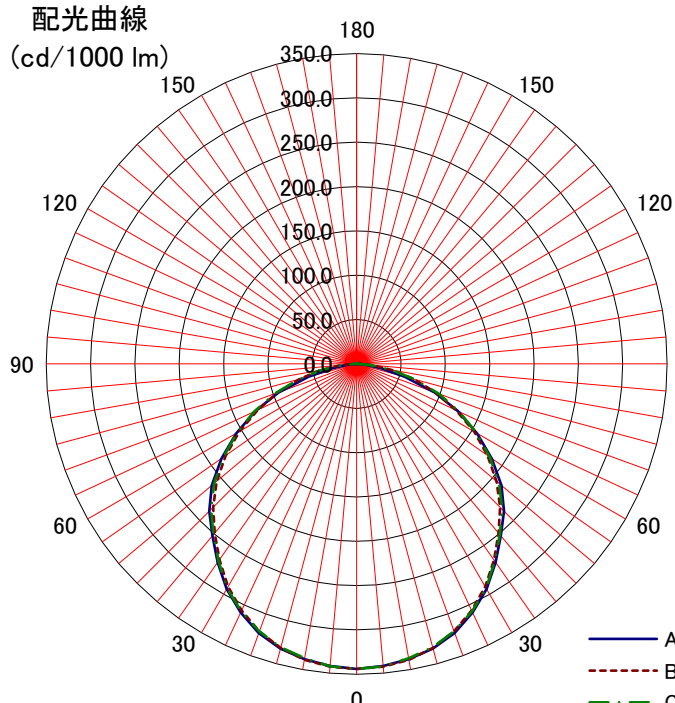

180 150 120 90 60 30 0

350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0

A  
B  
C-C'