
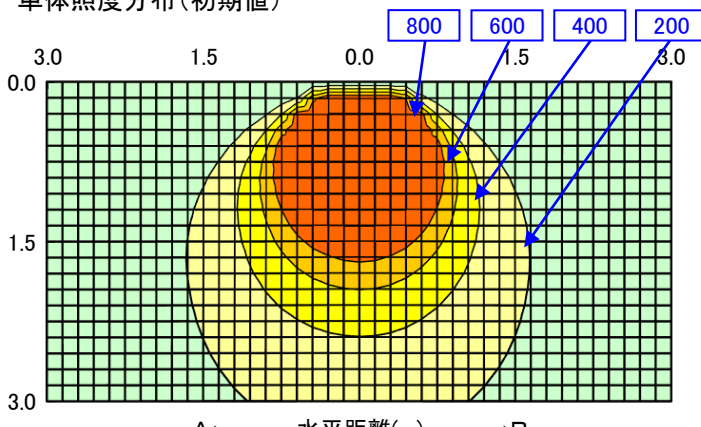



日立照明器具 照明特性

名称: 交換形LED笠付形 CP付	反射率	天井	80%				70%				50%			30%			0%																																																																																																																										
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																											
		床	10%														0%																																																																																																																										
形式: PC4B1CP	室指数	固有照明率 S/H=1.0																																																																																																																																									
<備考>	0.6	0.58	0.46	0.38	0.57	0.46	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31																																																																																																																												
	0.8	0.68	0.56	0.49	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40																																																																																																																												
姿図 	1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47																																																																																																																												
	1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54																																																																																																																												
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60																																																																																																																												
	2	0.90	0.83	0.77	0.88	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.67																																																																																																																												
	2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.72																																																																																																																												
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.81	0.79	0.76																																																																																																																												
	4	0.99	0.94	0.90	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81																																																																																																																												
光源形式	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.91	0.89	0.87	0.84																																																																																																																												
CE407WWG-N14A	7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89																																																																																																																												
器具光束	10	1.05	1.03	1.02	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.97	0.96	0.95	0.92																																																																																																																												
6,670 lm																																																																																																																																											
器具効率 Ft= 100%		<div>単体照度分布 (初期値)</div> 																																																																																																																																									
上方光束 Fu= 0.5%																																																																																																																																											
下方光束 Fd= 99.5%																																																																																																																																											
最大取付間隔		<div>配光曲線 (cd/1000 lm)</div> 																																																																																																																																									
A-A 1.28 H																																																																																																																																											
B-B 1.26 H																																																																																																																																											
保守率	良	0.86	<table><tr><td colspan="2">光度 (cd/1000 lm)</td><td>A-0</td><td>B-B</td><td>C-0</td><td>A'-0</td><td>C'-0</td></tr><tr><td>0</td><td>344</td><td>344</td><td>344</td><td></td><td></td></tr><tr><td>10</td><td>338</td><td>339</td><td>337</td><td></td><td></td></tr><tr><td>20</td><td>323</td><td>321</td><td>321</td><td></td><td></td></tr><tr><td>30</td><td>293</td><td>290</td><td>292</td><td></td><td></td></tr><tr><td>40</td><td>253</td><td>249</td><td>251</td><td></td><td></td></tr><tr><td>50</td><td>213</td><td>206</td><td>210</td><td></td><td></td></tr><tr><td>60</td><td>157</td><td>153</td><td>156</td><td></td><td></td></tr><tr><td>70</td><td>94</td><td>95</td><td>99</td><td></td><td></td></tr><tr><td>80</td><td>28</td><td>43</td><td>41</td><td></td><td></td></tr><tr><td>90</td><td></td><td>5</td><td>1</td><td></td><td></td></tr><tr><td>100</td><td></td><td>5</td><td>1</td><td></td><td></td></tr><tr><td>110</td><td></td><td>3</td><td>1</td><td></td><td></td></tr><tr><td>120</td><td></td><td>2</td><td>1</td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>																光度 (cd/1000 lm)		A-0	B-B	C-0	A'-0	C'-0	0	344	344	344			10	338	339	337			20	323	321	321			30	293	290	292			40	253	249	251			50	213	206	210			60	157	153	156			70	94	95	99			80	28	43	41			90		5	1			100		5	1			110		3	1			120		2	1			130						140						150						160						170						180					
	光度 (cd/1000 lm)																		A-0	B-B	C-0	A'-0	C'-0																																																																																																																				
	0	344																	344	344																																																																																																																							
10	338	339																	337																																																																																																																								
20	323	321																	321																																																																																																																								
30	293	290																	292																																																																																																																								
40	253	249																	251																																																																																																																								
50	213	206																	210																																																																																																																								
60	157	153																	156																																																																																																																								
70	94	95																	99																																																																																																																								
80	28	43																	41																																																																																																																								
90		5																	1																																																																																																																								
100		5																	1																																																																																																																								
110		3																	1																																																																																																																								
120		2																	1																																																																																																																								
130																																																																																																																																											
140																																																																																																																																											
150																																																																																																																																											
160																																																																																																																																											
170																																																																																																																																											
180																																																																																																																																											
中	0.81																																																																																																																																										
否	0.72																																																																																																																																										