
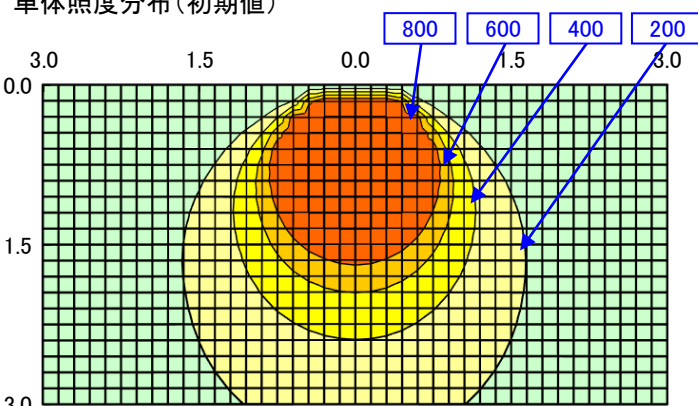
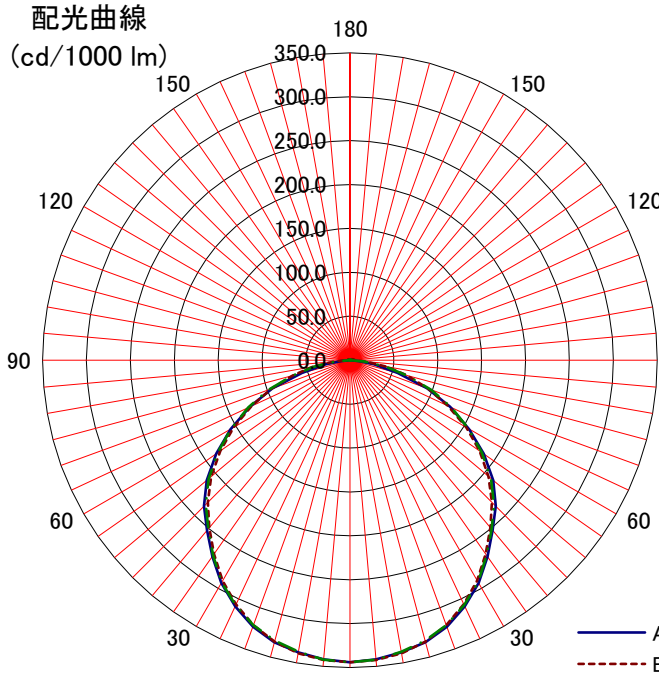


日立照明器具 照明特性

名称: 交換形LED笠付形 CP付	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
		室指数	固有照明率 S/H=1.0														
形式: PC4B1CP																	
<備考>	0.6	0.58	0.46	0.38	0.57	0.46	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31		
	0.8	0.68	0.56	0.49	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40		
姿図 	1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47		
	1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54		
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60		
	2	0.90	0.83	0.77	0.88	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.67		
	2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.72		
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.81	0.79	0.76		
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.81	0.79	0.76		
光源形式	4	0.99	0.94	0.90	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81		
CE407WWG-X14A	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.91	0.89	0.87	0.84		
器具光束	7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89		
6,670 lm	10	1.05	1.03	1.02	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.97	0.96	0.95	0.92		
器具効率 Ft= 100%		<div>単体照度分布 (初期値)</div>  <div>(m) 高さ</div> <div>0-200 200-400 400-600 600-800 800-1000</div> <div>A← 水平距離(m) →B</div>															
上方光束 Fu= 0.5%																	
下方光束 Fd= 99.5%																	
最大取付間隔		(m) 高さ															
A-A 1.28 H																	
B-B 1.26 H																	
保守率	良	0.86	0-200 200-400 400-600 600-800 800-1000														
	中	0.81															
	否	0.72															
光度 (cd/1000 lm)		A← 水平距離(m) →B															
	A-0															B-B	C-0
0	344	344	344			<div>配光曲線</div> <div>(cd/1000 lm)</div>  <div>— A - - - B - · - C-C'</div>											
10	338	339	337														
20	323	321	321														
30	293	290	292														
40	253	249	251														
50	213	206	210														
60	157	153	156														
70	94	95	99														
80	28	43	41														
90		5	1														
100		5	1														
110		3	1														
120		2	1														
130																	
140																	
150																	
160																	
170																	
180																	