

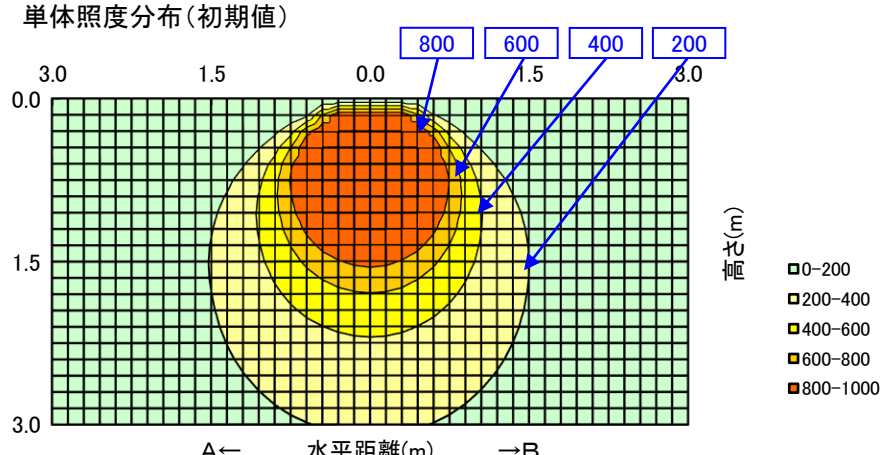


# 日立照明器具 照明特性

名称: 人感センサー付 交換形ベース器具 (笠付形)		反射率	天井	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
形式: PC4B1SL		室指数	固有照明率 S/H=1.0																
<備考>			0.6	0.58	0.46	0.38	0.57	0.46	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31		
<div>姿図</div> 		0.8	0.68	0.56	0.49	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40			
		1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47			
		1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54			
		1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60			
		2	0.90	0.83	0.77	0.88	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.67			
		2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.72			
		3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.81	0.79	0.76			
光源形式		4	0.99	0.94	0.90	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81			
CE406DE-X14A		5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.91	0.89	0.87	0.84			
器具光束		7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89			
5,600 lm		10	1.05	1.03	1.02	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.97	0.96	0.95	0.92			
器具効率 Ft= 100%			<div>単体照度分布(初期値)</div> 																
上方光束 Fu= 0.5%																			
下方光束 Fd= 99.5%																			
最大取付間隔																			
A-A 1.28 H																			
B-B 1.26 H																			
保守率	良	0.86																	
	中	0.81																	
	否	0.72																	
光度 (cd/1000 lm)			<div>配光曲線</div> <div>(cd/1000 lm)</div> 																
	A-0	B-B															C-0	A'-0	C'-0
0	344	344															344		
10	338	339															337		
20	323	321															321		
30	293	290															292		
40	253	249															251		
50	213	206															210		
60	157	153															156		
70	94	95															99		
80	28	43															41		
90		5															1		
100		5															1		
110		3															1		
120		2															1		
130																			
140																			
150																			
160																			
170																			
180																			

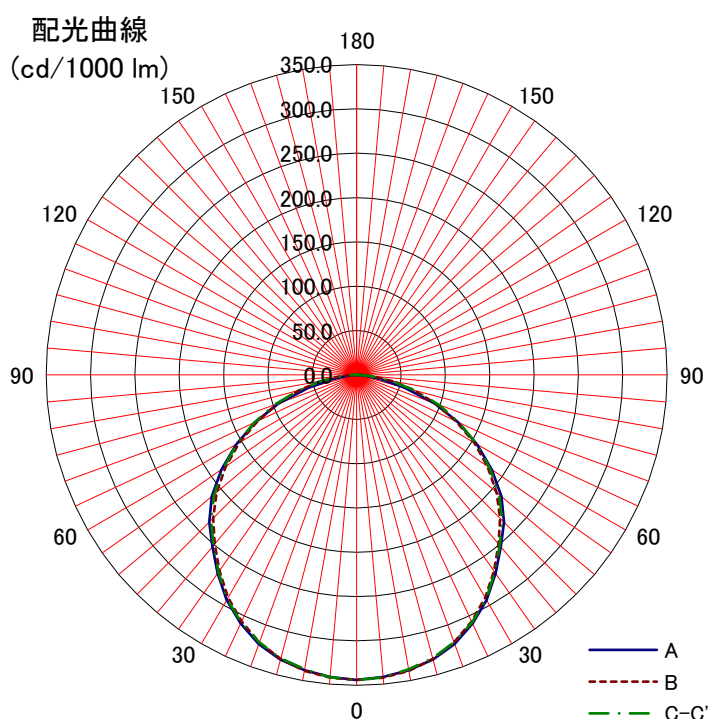