

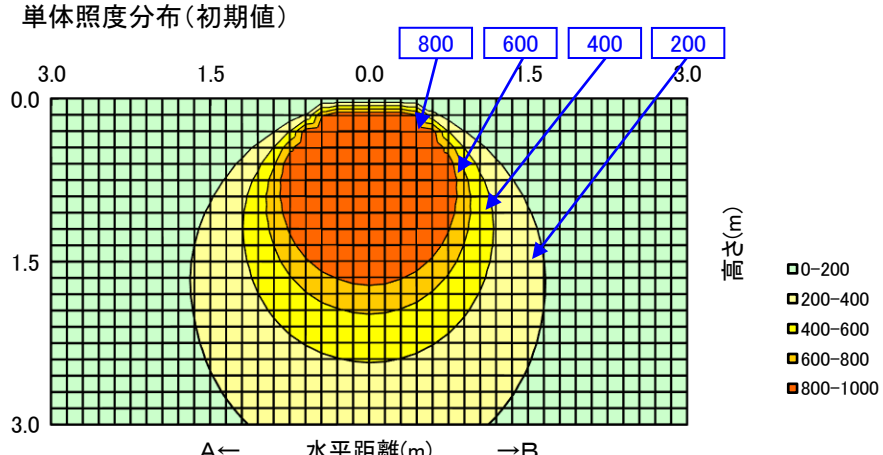


日立照明器具 照明特性

名称: 人感センサー付 交換形ベース器具 (笠付形)		反 射 率	天井	80%			70%			50%			30%			0%				
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
			床	10%														0%		
形式: PC4B1SL		室指数	固有照明率 S/H=1.0																	
<備考>		0.6	0.58	0.46	0.38	0.57	0.46	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31				
		0.8	0.68	0.56	0.49	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40				
姿図 		1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47				
		1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54				
		1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60				
		2	0.90	0.83	0.77	0.88	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.67				
		2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.72				
		3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.81	0.79	0.76				
光源形式		4	0.99	0.94	0.90	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81				
CE407NG-X14A		5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.91	0.89	0.87	0.84				
器具光束		7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89				
6,870 lm		10	1.05	1.03	1.02	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.97	0.96	0.95	0.92				
器具効率 Ft= 100%			<div>単体照度分布(初期値)</div> 																	
上方光束 Fu= 0.5%																				
下方光束 Fd= 99.5%																				
最大取付間隔																				
A-A		1.28																H		
B-B		1.26																H		
保守率	良	0.86																		
	中	0.81																		
	否	0.72																		
光度 (cd/1000 lm)																				
	A-0	B-B																C-0	A'-0	C'-0
0	344	344																344		
10	338	339																337		
20	323	321	321																	
30	293	290	292																	
40	253	249	251																	
50	213	206	210																	
60	157	153	156																	
70	94	95	99																	
80	28	43	41																	
90		5	1																	
100		5	1																	
110		3	1																	
120		2	1																	
130																				
140																				
150																				
160																				
170																				
180																				
			<div>配光曲線</div> <div>(cd/1000 lm)</div> 																	

配光曲線
(cd/1000 lm)

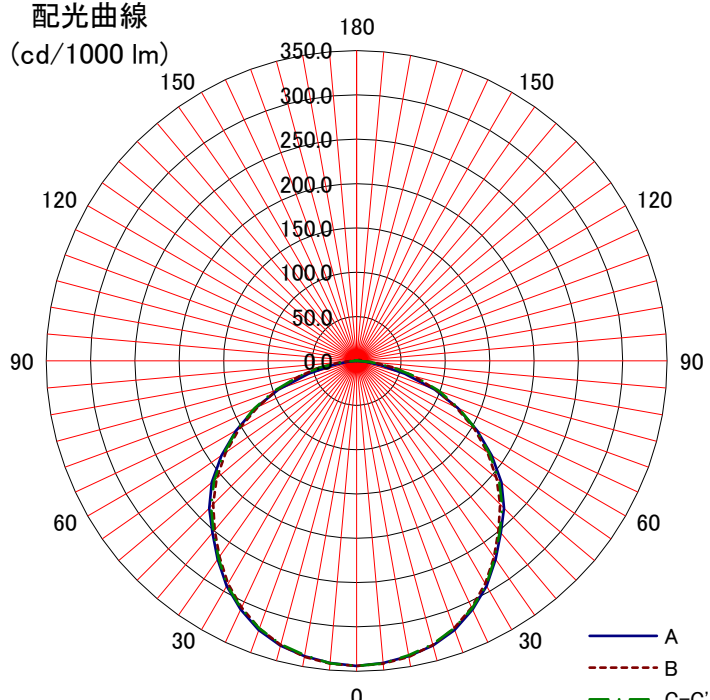