
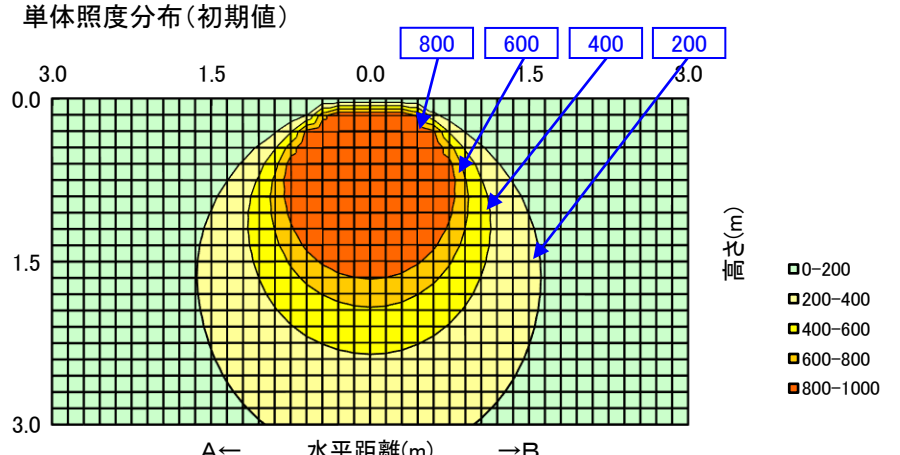
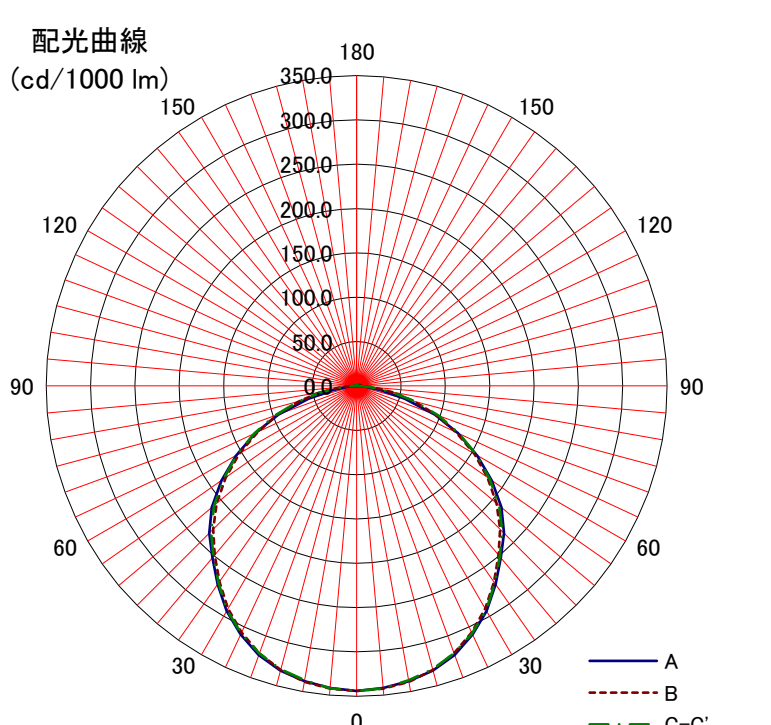


日立照明器具 照明特性

名称: 人感センサー付 交換形ベース器具 (笠付形)	天井	80%			70%				50%			30%			0%
	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
	床	10%													0%
形式: PC4B1SL	室指数	固有照明率 S/H=1.0													
<備考>	0.6	0.58	0.46	0.38	0.57	0.46	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31
	0.8	0.68	0.56	0.49	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40
姿図 	1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47
	1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60
	2	0.90	0.83	0.77	0.88	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.67
	2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.72
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.81	0.79	0.76
光源形式 CE407LE-X14A	4	0.99	0.94	0.90	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81
	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.91	0.89	0.87	0.84
器具光束 6,440 lm	7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89
	10	1.05	1.03	1.02	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.97	0.96	0.95	0.92
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> 													
上方光束 Fu= 0.5%															
下方光束 Fd= 99.5%															
最大取付間隔		<div>配光曲線</div> <div>(cd/1000 lm)</div> 													
A-A 1.28 H															
B-B 1.26 H															
保守率	良	0.86													
	中	0.81													
	否	0.72													
光度 (cd/1000 lm)															
	A-0	B-B	C-0	A'-0	C'-0										
0	344	344	344												
10	338	339	337												
20	323	321	321												
30	293	290	292												
40	253	249	251												
50	213	206	210												
60	157	153	156												
70	94	95	99												
80	28	43	41												
90		5	1												
100		5	1												
110		3	1												
120		2	1												
130															
140															
150															
160															
170															
180															