
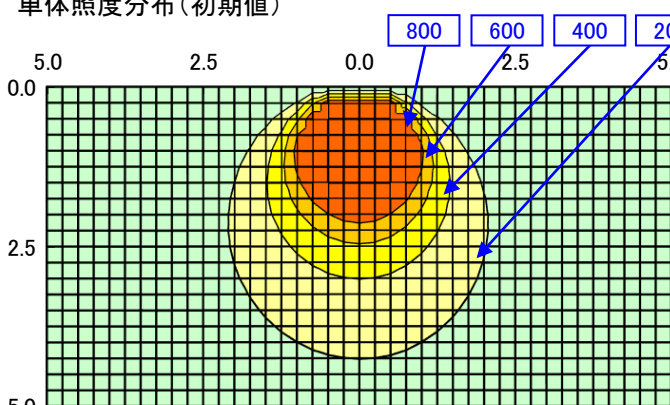
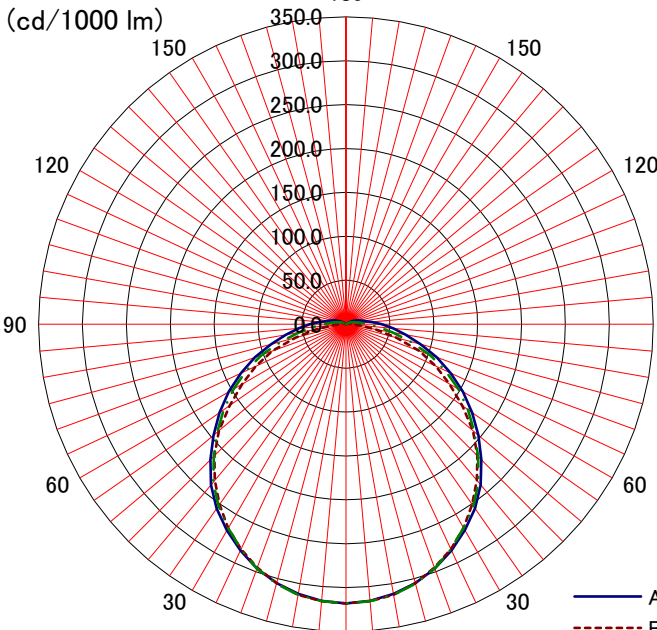


# 日立照明器具 照明特性

名称: 交換形LEDトラフ形	反射率	天井	80%				70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														
形式: PC8A	室指数	固有照明率 S/H=1.0															
<div>&lt;備考&gt;</div> <div></div>	0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28		
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37		
	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43		
	1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50		
	1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55		
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63		
	2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68		
3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71			
光源形式	4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76		
CE812DG-C24A	5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80		
器具光束	7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84		
11,410 lm	10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88		
器具効率 Ft= 100%		<div>単体照度分布 (初期値)</div> <div></div> <div>0-200 200-400 400-600 600-800 800-1000</div>															
上方光束 Fu= 3.5%																	
下方光束 Fd= 96.5%																	
最大取付間隔																	
A-A 1.28 H																	
B-B 1.26 H																	
保守率	良	0.88															
	中	0.86															
	否	0.81															
光度 (cd/1000 lm)		<div>配光曲線 (cd/1000 lm)</div> <div></div> <div>A B C-C'</div>															
	A-0															B-B	C-0
0	318															318	318
10	312															313	313
20	296															295	296
30	271															268	268
40	239															232	235
50	197															189	191
60	154															136	148
70	110															89	102
80	69															35	54
90	41															5	25
100	21															5	12
110	13															3	6
120	5															2	1
130																	
140																	
150																	
160																	
170																	
180																	