
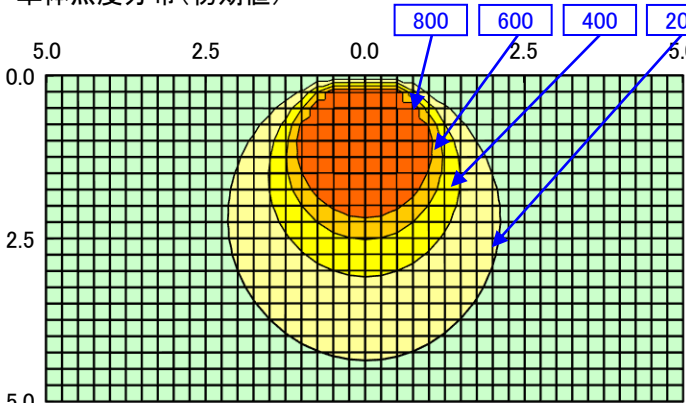
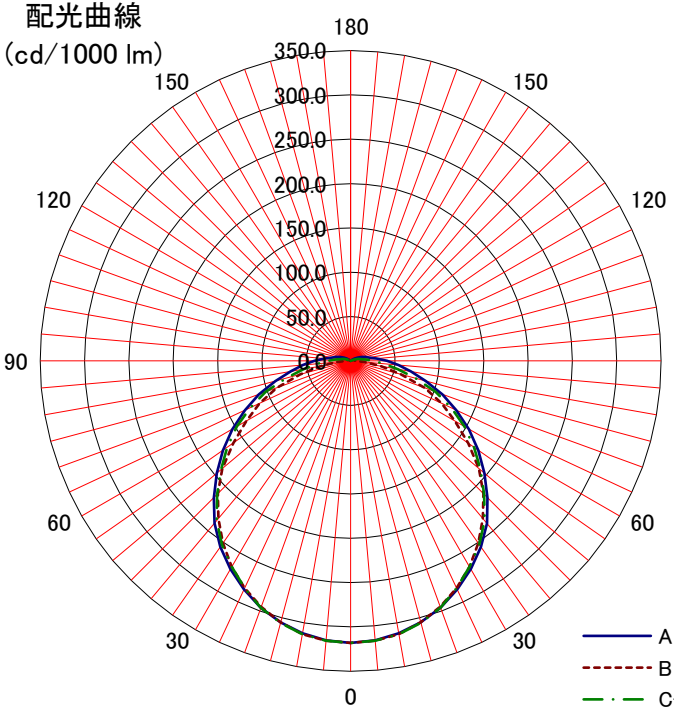


日立照明器具 照明特性

名称: 交換形LEDトラフ形		天井	80%			70%				50%			30%			0%																					
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																				
形式: PC8A		床	10%															0%																			
			固有照明率 S/H=1.0																																		
<備考>		室指数	0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28																				
			0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37																				
姿図 		1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43																					
		1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50																					
		1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55																					
		2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63																					
		2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68																					
		3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71																					
光源形式 CE812NE-N24A		4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76																					
		5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80																					
器具光束 12,000 lm		7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84																					
		10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88																					
器具効率 Ft= 100%			<div>単体照度分布(初期値) </div>																																		
上方光束 Fu= 3.5%																																					
下方光束 Fd= 96.5%																																					
最大取付間隔			<div>配光曲線 (cd/1000 lm) </div>																																		
A-A 1.28 H																																					
B-B 1.26 H																																					
保守率	良	0.88	<div>器具効率 Ft= 100%</div> <div>上方光束 Fu= 3.5%</div> <div>下方光束 Fd= 96.5%</div>																																		
	中	0.86																																			
	否	0.81																																			
光度 (cd/1000 lm)																			<div>器具効率 Ft= 100%</div> <div>上方光束 Fu= 3.5%</div> <div>下方光束 Fd= 96.5%</div>																		
	A-0	B-B																																	C-0	A'-0	C'-0
0	318	318																																	318		
10	312	313																																	313		
20	296	295																																	296		
30	271	268																																	268		
40	239	232																																	235		
50	197	189																																	191		
60	154	136																																	148		
70	110	89																																	102		
80	69	35																																	54		
90	41	5																																	25		
100	21	5																																	12		
110	13	3																																	6		
120	5	2																																	1		
130																																					
140																																					
150																																					
160																																					
170																																					
180																																					