
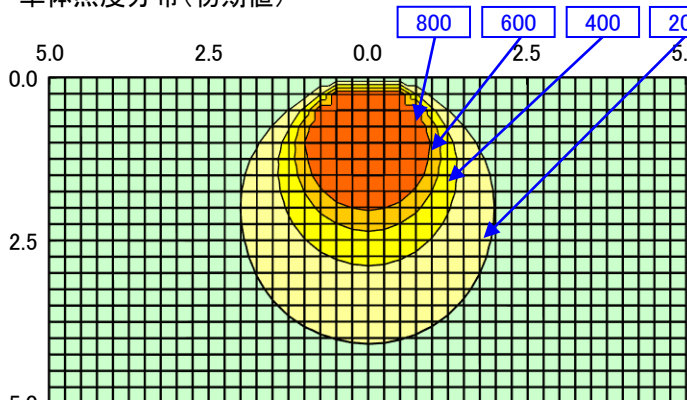
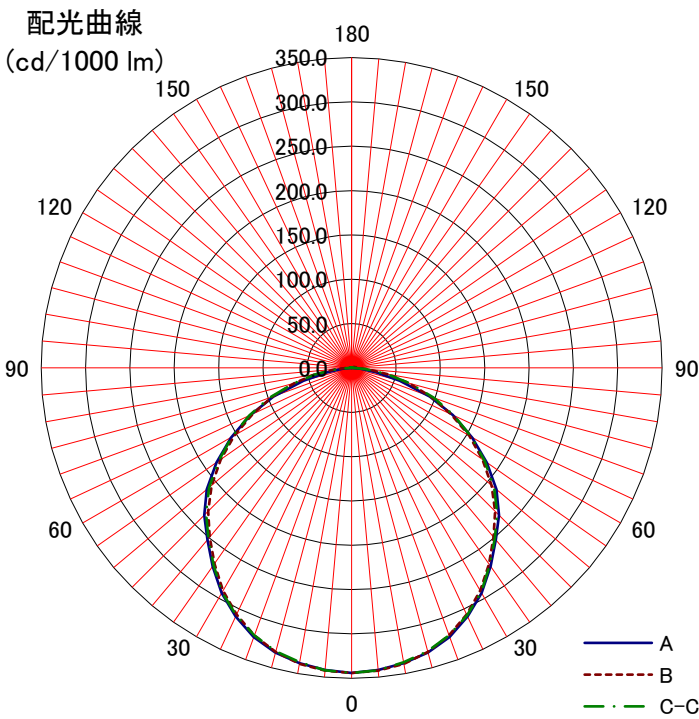
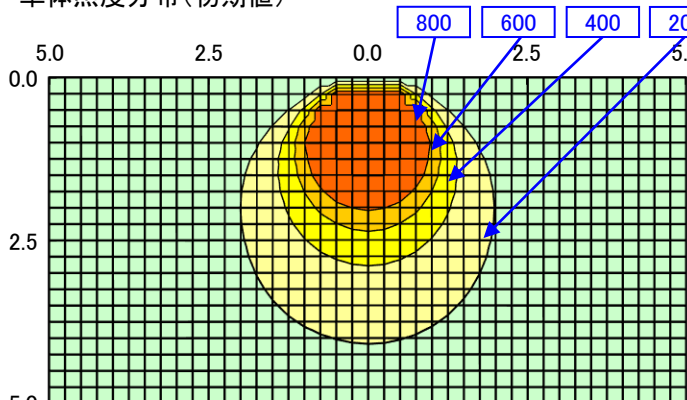


日立照明器具 照明特性

名称: 交換形LED笠付形	天井 反射率	80%			70%				50%			30%			0%					
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
		床	10%														0%			
形式: PC8B	室指数	固有照明率 S/H=1.0																		
〈備考〉	0.6	0.58	0.46	0.38	0.57	0.46	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31					
	0.8	0.68	0.56	0.49	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40					
	1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47					
姿図 	1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54					
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60					
	2	0.90	0.83	0.77	0.88	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.67					
	2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.72					
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.81	0.79	0.76					
光源形式 CE810WE-N24A	4	0.99	0.94	0.90	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81					
	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.91	0.89	0.87	0.84					
器具光束 9,700 lm	7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89					
	10	1.05	1.03	1.02	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.97	0.96	0.95	0.92					
器具効率 Ft= 100%		<div>単体照度分布 (初期値)</div>  <div>0-200 200-400 400-600 600-800 800-1000</div>																		
上方光束 Fu= 0.5%																				
下方光束 Fd= 99.5%																				
最大取付間隔		<div>配光曲線 (cd/1000 lm)</div>  <div>A B C-C'</div>																		
A-A 1.28 H																				
B-B 1.26 H																				
保守率	良																0.86			
	中																0.81			
	否	0.72																		
光度 (cd/1000 lm)		<div>単体照度分布 (初期値)</div>  <div>0-200 200-400 400-600 600-800 800-1000</div>																		
	A-0																B-B	C-0	A'-0	C'-0
0	344																344	344		
10	338																339	337		
20	323																321	321		
30	293	290	292																	
40	253	249	251																	
50	213	206	210																	
60	157	153	156																	
70	94	95	99																	
80	28	43	41																	
90		5	1																	
100		5	1																	
110		3	1																	
120		2	1																	
130																				
140																				
150																				
160																				
170																				
180																				