
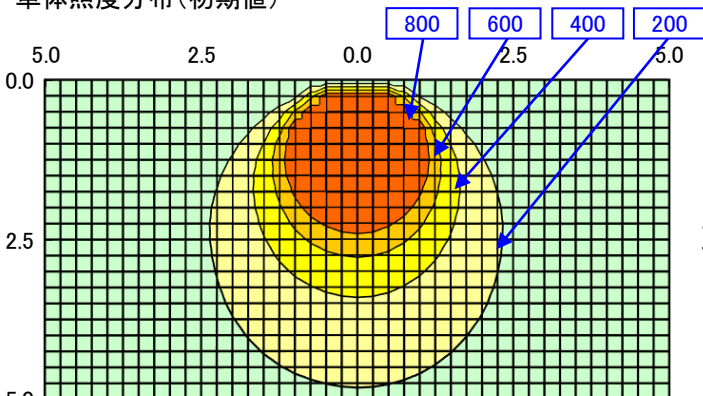
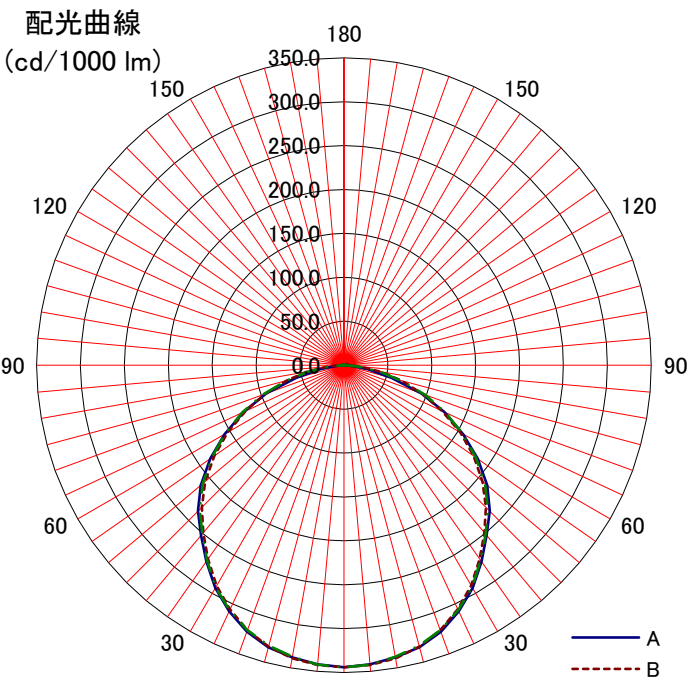


## 日立照明器具 照明特性

|   |                            |  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|---|----------------------------|--|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 名称: 交換形LED笠付形   | 天井<br>反射率<br>壁<br>床<br>室指数 | 80%  |      |      | 70%  |      |      |      | 50%  |      |      | 30%  |      |      | 0%   |      |
|   |                            | 70%  | 50%  | 30%  | 70%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0%   |      |
|   |                            | 10%  |      |      |      |      |      |      |      |      |      |      |      |      |      | 0%   |
| 形式: PC8B  |                            | 固有照明率 S/H=1.0  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| ＜備考＞  |                            | 0.6  | 0.58 | 0.46 | 0.38 | 0.57 | 0.46 | 0.38 | 0.33 | 0.44 | 0.38 | 0.33 | 0.43 | 0.37 | 0.33 | 0.31 |
| <div>姿図</div>  |                            | 0.8  | 0.68 | 0.56 | 0.49 | 0.66 | 0.56 | 0.48 | 0.43 | 0.54 | 0.47 | 0.42 | 0.53 | 0.47 | 0.42 | 0.40 |
|   | 1                          | 0.74   | 0.63 | 0.56 | 0.73 | 0.63 | 0.55 | 0.50 | 0.61 | 0.55 | 0.50 | 0.59 | 0.54 | 0.49 | 0.47 |      |
|   | 1.25                       | 0.80   | 0.70 | 0.63 | 0.78 | 0.69 | 0.63 | 0.57 | 0.68 | 0.62 | 0.57 | 0.66 | 0.61 | 0.56 | 0.54 |      |
|   | 1.5                        | 0.84   | 0.76 | 0.69 | 0.83 | 0.75 | 0.68 | 0.63 | 0.73 | 0.67 | 0.63 | 0.71 | 0.66 | 0.62 | 0.60 |      |
|   | 2                          | 0.90   | 0.83 | 0.77 | 0.88 | 0.82 | 0.76 | 0.72 | 0.80 | 0.75 | 0.71 | 0.78 | 0.74 | 0.70 | 0.67 |      |
|   | 2.5                        | 0.93   | 0.87 | 0.82 | 0.92 | 0.86 | 0.81 | 0.77 | 0.84 | 0.80 | 0.76 | 0.82 | 0.78 | 0.75 | 0.72 |      |
|   | 3                          | 0.96   | 0.90 | 0.86 | 0.94 | 0.89 | 0.85 | 0.81 | 0.87 | 0.83 | 0.80 | 0.85 | 0.81 | 0.79 | 0.76 |      |
| 光源形式  | 4                          | 0.99   | 0.94 | 0.90 | 0.97 | 0.93 | 0.90 | 0.86 | 0.91 | 0.88 | 0.85 | 0.89 | 0.86 | 0.84 | 0.81 |      |
| CE814WG-X24A  | 5                          | 1.01   | 0.97 | 0.94 | 0.99 | 0.96 | 0.93 | 0.90 | 0.94 | 0.91 | 0.89 | 0.91 | 0.89 | 0.87 | 0.84 |      |
| 器具光束  | 7                          | 1.03   | 1.01 | 0.98 | 1.02 | 0.99 | 0.97 | 0.95 | 0.97 | 0.95 | 0.93 | 0.95 | 0.93 | 0.92 | 0.89 |      |
| 13,480 lm   | 10                         | 1.05   | 1.03 | 1.02 | 1.04 | 1.02 | 1.00 | 0.99 | 1.00 | 0.98 | 0.97 | 0.97 | 0.96 | 0.95 | 0.92 |      |
| 器具効率 Ft= 100%   |                            | <div>単体照度分布 (初期値)</div>  <div>5.0 2.5 0.0 2.5 5.0</div> <div>0.0 2.5 5.0</div> <div>水平距離(m)</div> <div>0-200<br/>200-400<br/>400-600<br/>600-800<br/>800-1000</div> |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 上方光束 Fu= 0.5%   |                            |  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 下方光束 Fd= 99.5%  |                            |  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 最大取付間隔  |                            |  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| A-A 1.28 H  |                            |  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| B-B 1.26 H  |                            |  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 保守率   | 良                          | 0.86   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|   | 中                          | 0.81   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|   | 否                          | 0.72   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 光度 (cd/1000 lm)   |                            |  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|   | A-0                        | B-B  | C-0  | A'-0 | C'-0 |      |      |      |      |      |      |      |      |      |      |      |
| 0   | 344                        | 344  | 344  |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 10  | 338                        | 339  | 337  |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 20  | 323                        | 321  | 321  |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 30  | 293                        | 290  | 292  |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 40  | 253                        | 249  | 251  |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 50  | 213                        | 206  | 210  |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 60  | 157                        | 153  | 156  |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 70  | 94                         | 95   | 99   |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 80  | 28                         | 43   | 41   |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 90  |                            | 5  | 1    |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 100   |                            | 5  | 1    |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 110   |                            | 3  | 1    |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 120   |                            | 2  | 1    |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 130   |                            |  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 140   |                            |  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 150   |                            |  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 160   |                            |  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 170   |                            |  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 180   |                            |  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 配光曲線 (cd/1000 lm)   |                            |  <div>180 150 120 90 60 30 0</div> <div>350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0</div> <div>A B C-C'</div>   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |