
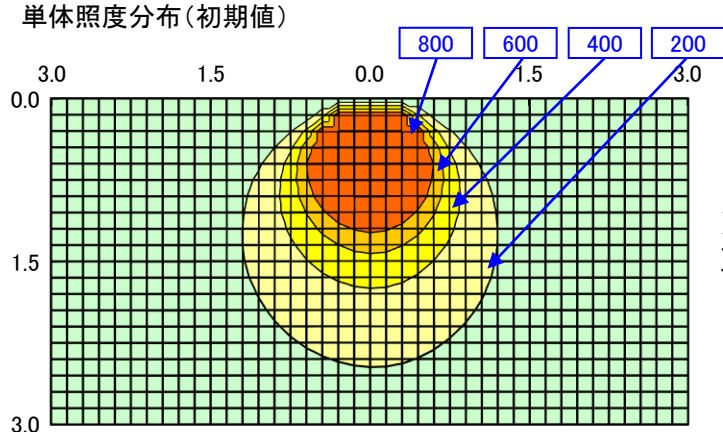
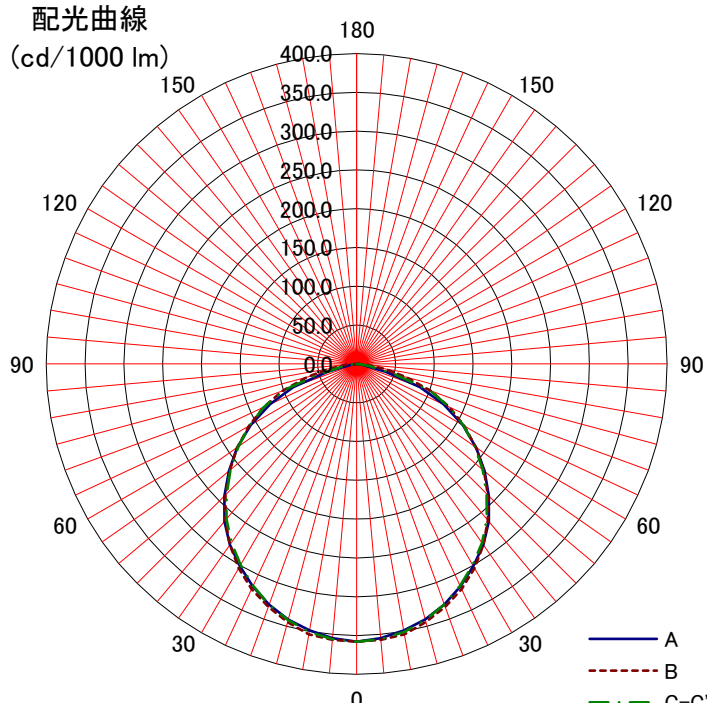


# 日立照明器具 照明特性

名称: 交換形LED埋込形		反射率	天井	80%			70%			50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														
形式: TC4A		室指数	固有照明率 S/H=1.0															
<備考>			0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.39	0.34	0.44	0.38	0.34	0.32	
		0.8	0.68	0.57	0.50	0.67	0.57	0.49	0.44	0.55	0.49	0.44	0.54	0.48	0.43	0.41		
姿図 		1	0.75	0.64	0.57	0.73	0.64	0.57	0.51	0.62	0.56	0.51	0.61	0.55	0.51	0.48		
		1.25	0.81	0.71	0.64	0.79	0.71	0.64	0.59	0.69	0.63	0.58	0.67	0.62	0.58	0.56		
		1.5	0.85	0.77	0.70	0.84	0.76	0.70	0.65	0.74	0.69	0.64	0.72	0.68	0.64	0.61		
		2	0.91	0.84	0.78	0.89	0.83	0.78	0.73	0.81	0.76	0.73	0.79	0.75	0.72	0.69		
		2.5	0.94	0.88	0.83	0.93	0.87	0.83	0.79	0.85	0.81	0.78	0.83	0.80	0.77	0.74		
		3	0.96	0.91	0.87	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.78		
光源形式		4	0.99	0.95	0.92	0.98	0.94	0.91	0.88	0.92	0.89	0.86	0.90	0.87	0.85	0.83		
CET403DE-X14A		5	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.95	0.92	0.90	0.92	0.90	0.89	0.86		
器具光束		7	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.94	0.93	0.90		
3,410 lm		10	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.94		
器具効率 Ft= 100%			単体照度分布(初期値) 															
上方光束 Fu= 0%																		
下方光束 Fd= 100%																		
			最大取付間隔 A-A 1.26 H B-B 1.28 H															
保守率	良	0.86	配光曲線 (cd/1000 lm) 															
	中	0.81																
	否	0.72																
光度 (cd/1000 lm)			A-0	B-B	C-0	A'-0	C'-0											
	0	358	358	358														
	10	349	354	351														
	20	330	333	330														
	30	301	304	299														
	40	265	263	261														
	50	215	214	212														
	60	158	160	159														
	70	87	102	100														
	80	9	37	17														
	90																	
	100																	
	110																	
	120																	
	130																	
	140																	
	150																	
	160																	
	170																	
	180																	