
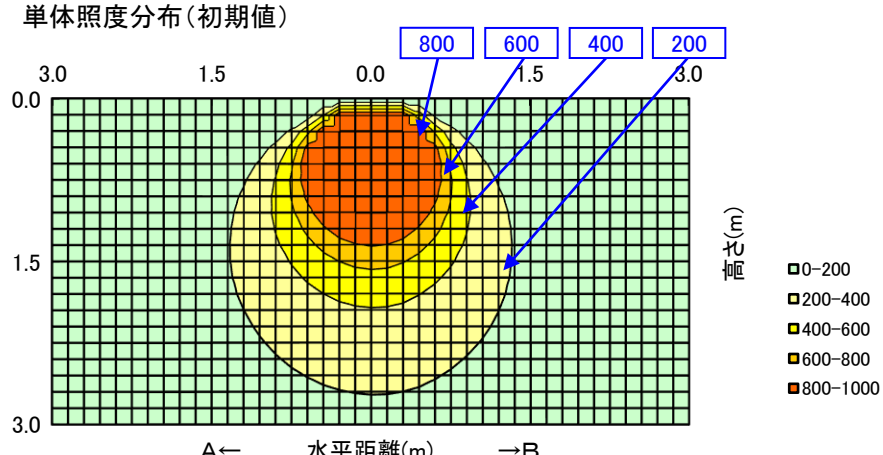
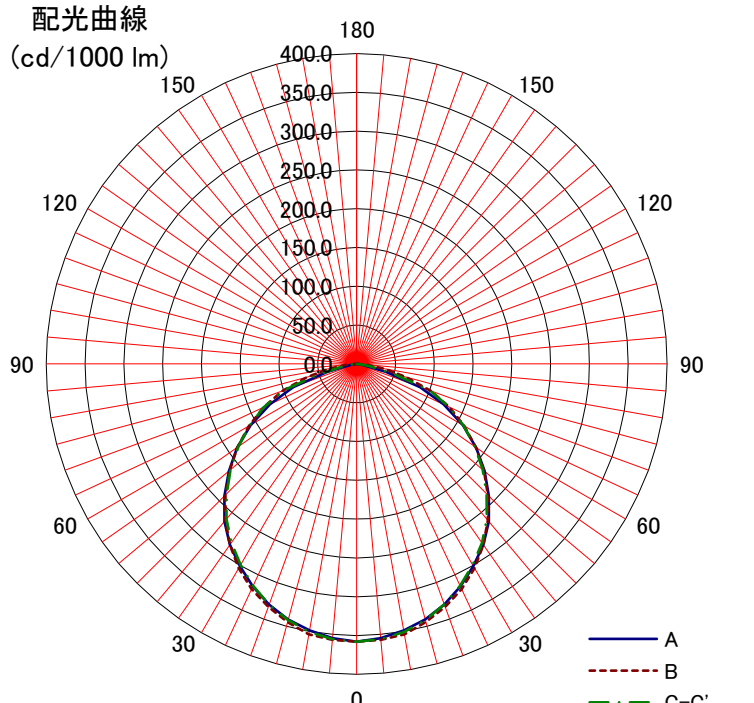


# 日立照明器具 照明特性

名称: 交換形LED埋込形	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: TC4A	室指数	固有照明率 S/H=1.0														
〈備考〉	0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.39	0.34	0.44	0.38	0.34	0.32	
	0.8	0.68	0.57	0.50	0.67	0.57	0.49	0.44	0.55	0.49	0.44	0.54	0.48	0.43	0.41	
姿図 	1	0.75	0.64	0.57	0.73	0.64	0.57	0.51	0.62	0.56	0.51	0.61	0.55	0.51	0.48	
	1.25	0.81	0.71	0.64	0.79	0.71	0.64	0.59	0.69	0.63	0.58	0.67	0.62	0.58	0.56	
	1.5	0.85	0.77	0.70	0.84	0.76	0.70	0.65	0.74	0.69	0.64	0.72	0.68	0.64	0.61	
	2	0.91	0.84	0.78	0.89	0.83	0.78	0.73	0.81	0.76	0.73	0.79	0.75	0.72	0.69	
	2.5	0.94	0.88	0.83	0.93	0.87	0.83	0.79	0.85	0.81	0.78	0.83	0.80	0.77	0.74	
	3	0.96	0.91	0.87	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.78	
光源形式	4	0.99	0.95	0.92	0.98	0.94	0.91	0.88	0.92	0.89	0.86	0.90	0.87	0.85	0.83	
CET404NE-X14A	5	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.95	0.92	0.90	0.92	0.90	0.89	0.86	
器具光束	7	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.94	0.93	0.90	
4,150 lm	10	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.94	
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.26 H																
B-B 1.28 H																
保守率	良 0.86 中 0.81 否 0.72															
光度 (cd/1000 lm)		<div>配光曲線</div> <div>(cd/1000 lm)</div> 														
	A-0 B-B C-0 A'-0 C'-0															
0	358 358 358															
10	349 354 351															
20	330 333 330															
30	301 304 299															
40	265 263 261															
50	215 214 212															
60	158 160 159															
70	87 102 100															
80	9 37 17															
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																