
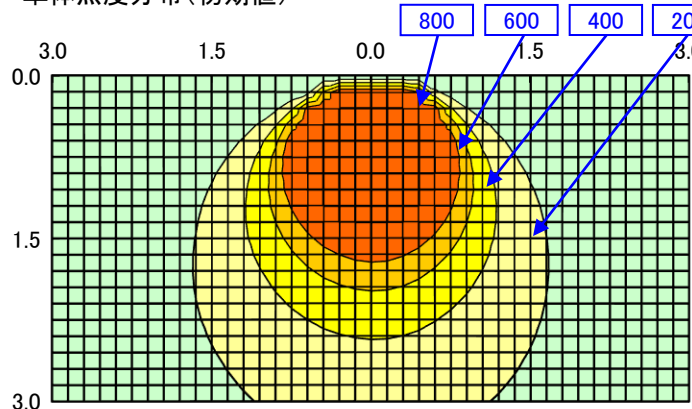
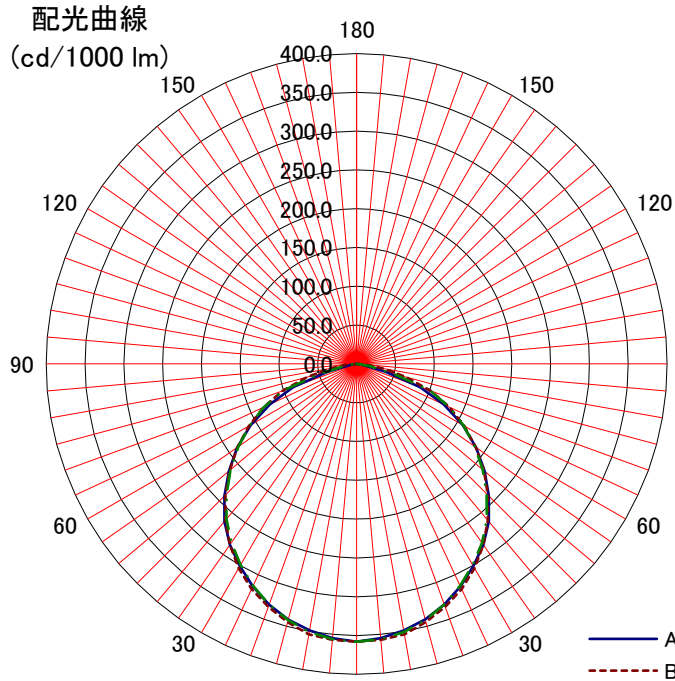


日立照明器具 照明特性

名称: 交換形LED埋込形		天井	80%			70%				50%			30%			0%																																																																																																																									
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																								
形式: TC4A		床	10%															0%																																																																																																																							
			固有照明率 S/H=1.0																																																																																																																																						
<備考>		室指数	0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.39	0.34	0.44	0.38	0.34	0.32																																																																																																																								
		0.8	0.68	0.57	0.50	0.67	0.57	0.49	0.44	0.55	0.49	0.44	0.54	0.48	0.43	0.41																																																																																																																									
姿図 		1	0.75	0.64	0.57	0.73	0.64	0.57	0.51	0.62	0.56	0.51	0.61	0.55	0.51	0.48																																																																																																																									
		1.25	0.81	0.71	0.64	0.79	0.71	0.64	0.59	0.69	0.63	0.58	0.67	0.62	0.58	0.56																																																																																																																									
		1.5	0.85	0.77	0.70	0.84	0.76	0.70	0.65	0.74	0.69	0.64	0.72	0.68	0.64	0.61																																																																																																																									
		2	0.91	0.84	0.78	0.89	0.83	0.78	0.73	0.81	0.76	0.73	0.79	0.75	0.72	0.69																																																																																																																									
		2.5	0.94	0.88	0.83	0.93	0.87	0.83	0.79	0.85	0.81	0.78	0.83	0.80	0.77	0.74																																																																																																																									
		3	0.96	0.91	0.87	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.78																																																																																																																									
光源形式 CET407NE-X14A		4	0.99	0.95	0.92	0.98	0.94	0.91	0.88	0.92	0.89	0.86	0.90	0.87	0.85	0.83																																																																																																																									
		5	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.95	0.92	0.90	0.92	0.90	0.89	0.86																																																																																																																									
器具光束 6,600 lm		7	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.94	0.93	0.90																																																																																																																									
		10	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.94																																																																																																																									
器具効率 Ft= 100%			<div>単体照度分布(初期値)</div>  <div>800 600 400 200</div> <div>3.0 1.5 0.0 1.5 3.0</div> <div>0.0 1.5 3.0</div> <div>水平距離(m)</div> <div>0-200 200-400 400-600 600-800 800-1000</div>																																																																																																																																						
上方光束 Fu= 0%																																																																																																																																									
下方光束 Fd= 100%																																																																																																																																									
最大取付間隔			<div>配光曲線</div> <div>(cd/1000 lm)</div>  <div>180 150 150 120 120 90 90 60 60 30 30 0</div> <div>400.0 350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0</div> <div>A B C-C'</div>																																																																																																																																						
A-A 1.26 H																																																																																																																																									
B-B 1.28 H																																																																																																																																									
保守率																																																																																																																																									
良 0.86			<div>光度 (cd/1000 lm)</div> <table><thead><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr></thead><tbody><tr><td>0</td><td>358</td><td>358</td><td>358</td><td></td><td></td></tr><tr><td>10</td><td>349</td><td>354</td><td>351</td><td></td><td></td></tr><tr><td>20</td><td>330</td><td>333</td><td>330</td><td></td><td></td></tr><tr><td>30</td><td>301</td><td>304</td><td>299</td><td></td><td></td></tr><tr><td>40</td><td>265</td><td>263</td><td>261</td><td></td><td></td></tr><tr><td>50</td><td>215</td><td>214</td><td>212</td><td></td><td></td></tr><tr><td>60</td><td>158</td><td>160</td><td>159</td><td></td><td></td></tr><tr><td>70</td><td>87</td><td>102</td><td>100</td><td></td><td></td></tr><tr><td>80</td><td>9</td><td>37</td><td>17</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>																A-0	B-B	C-0	A'-0	C'-0	0	358	358	358			10	349	354	351			20	330	333	330			30	301	304	299			40	265	263	261			50	215	214	212			60	158	160	159			70	87	102	100			80	9	37	17			90						100						110						120						130						140						150						160						170						180					
	A-0	B-B																C-0	A'-0	C'-0																																																																																																																					
0	358	358																358																																																																																																																							
10	349	354																351																																																																																																																							
20	330	333																330																																																																																																																							
30	301	304																299																																																																																																																							
40	265	263																261																																																																																																																							
50	215	214																212																																																																																																																							
60	158	160																159																																																																																																																							
70	87	102																100																																																																																																																							
80	9	37																17																																																																																																																							
90																																																																																																																																									
100																																																																																																																																									
110																																																																																																																																									
120																																																																																																																																									
130																																																																																																																																									
140																																																																																																																																									
150																																																																																																																																									
160																																																																																																																																									
170																																																																																																																																									
180																																																																																																																																									
中 0.81																																																																																																																																									
否 0.72																																																																																																																																									