
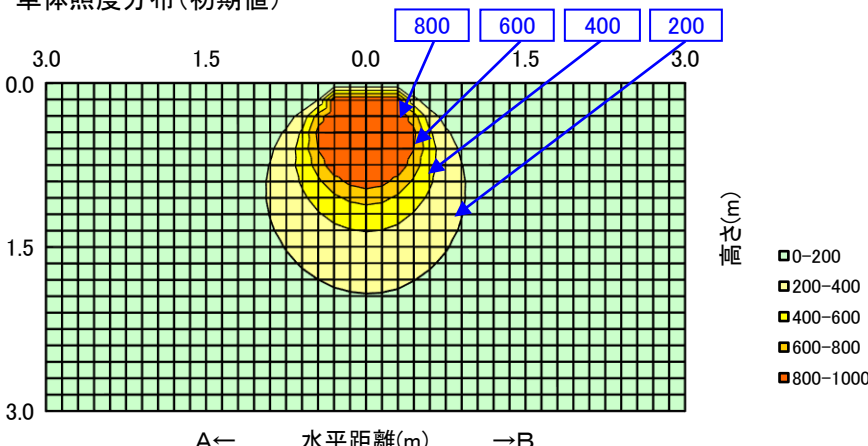
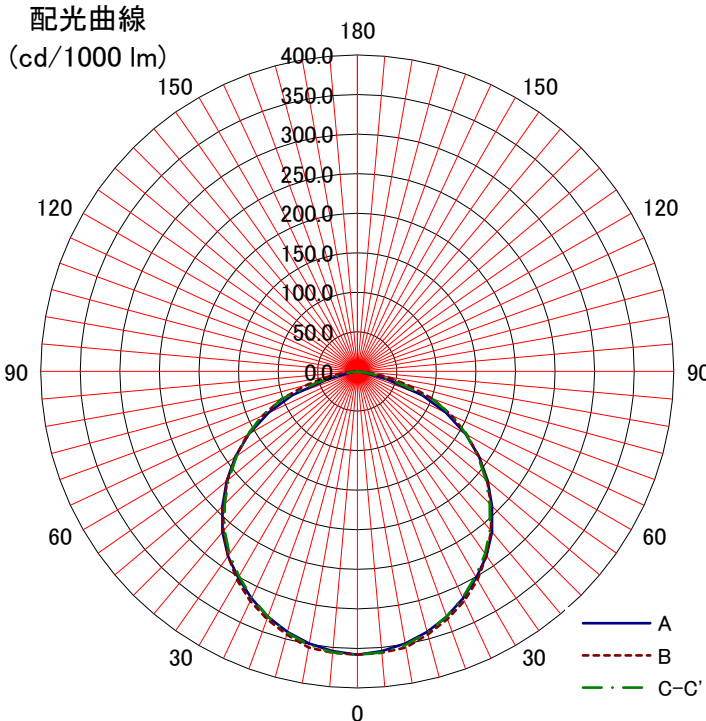


日立照明器具 照明特性																													
名称: 交換形LED埋込形	反射率	天井	80%			70%				50%			30%			0%													
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%													
		床	10%													0%													
形式: TC4A1	室指数	固有照明率 S/H=1.0																											
<備考>	0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.39	0.34	0.44	0.38	0.34	0.32														
	0.8	0.68	0.57	0.50	0.67	0.57	0.49	0.44	0.55	0.49	0.44	0.54	0.48	0.43	0.41														
姿図 	1	0.75	0.64	0.57	0.73	0.64	0.57	0.51	0.62	0.56	0.51	0.61	0.55	0.51	0.48														
	1.25	0.81	0.71	0.64	0.79	0.71	0.64	0.59	0.69	0.63	0.58	0.67	0.62	0.58	0.56														
	1.5	0.85	0.77	0.70	0.84	0.76	0.70	0.65	0.74	0.69	0.64	0.72	0.68	0.64	0.61														
	2	0.91	0.84	0.78	0.89	0.83	0.78	0.73	0.81	0.76	0.73	0.79	0.75	0.72	0.69														
	2.5	0.94	0.88	0.83	0.93	0.87	0.83	0.79	0.85	0.81	0.78	0.83	0.80	0.77	0.74														
	3	0.96	0.91	0.87	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.78														
光源形式	4	0.99	0.95	0.92	0.98	0.94	0.91	0.88	0.92	0.89	0.86	0.90	0.87	0.85	0.83														
CET402NE-X14A	5	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.95	0.92	0.90	0.92	0.90	0.89	0.86														
器具光束	7	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.94	0.93	0.90														
2,070 lm	10	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.94														
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div>  <div>800 600 400 200</div> <div>3.0 1.5 0.0 1.5 3.0</div> <div>0.0 1.5 3.0</div> <div>A ← 水平距離(m) → B</div> <div>(E) ヶ</div> <div>0-200 200-400 400-600 600-800 800-1000</div>																											
上方光束 Fu= 0%																													
下方光束 Fd= 100%																													
最大取付間隔																													
A-A 1.26 H																													
B-B 1.28 H																													
保守率	良	0.86	<div>配光曲線</div> <div>(cd/1000 lm)</div>  <div>180 150 120 90 60 30 0</div> <div>400.0 350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0</div> <div>0 30 60 90 120 150 180</div> <div>A B C-C'</div>																										
	中	0.81																											
	否	0.72																											
光度 (cd/1000 lm)																													
	A-0	B-B															C-0	A'-0	C'-0										
0	358	358															358												
10	349	354	351																										
20	330	333	330																										
30	301	304	299																										
40	265	263	261																										
50	215	214	212																										
60	158	160	159																										
70	87	102	100																										
80	9	37	17																										
90																													
100																													
110																													
120																													
130																													
140																													
150																													
160																													
170																													
180																													