
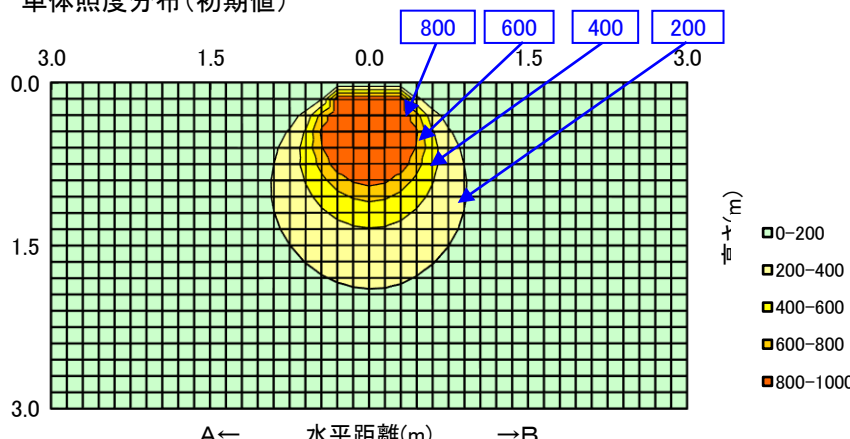


日立照明器具 照明特性

名称: 交換形LED埋込形	反射率	天井	80%				70%				50%			30%			0%															
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																
		床	10%														0%															
形式: TC4A1	室指数	固有照明率 S/H=1.0																														
＜備考＞	0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.39	0.34	0.44	0.38	0.34	0.32																	
	0.8	0.68	0.57	0.50	0.67	0.57	0.49	0.44	0.55	0.49	0.44	0.54	0.48	0.43	0.41																	
姿図 	1	0.75	0.64	0.57	0.73	0.64	0.57	0.51	0.62	0.56	0.51	0.61	0.55	0.51	0.48																	
	1.25	0.81	0.71	0.64	0.79	0.71	0.64	0.59	0.69	0.63	0.58	0.67	0.62	0.58	0.56																	
	1.5	0.85	0.77	0.70	0.84	0.76	0.70	0.65	0.74	0.69	0.64	0.72	0.68	0.64	0.61																	
	2	0.91	0.84	0.78	0.89	0.83	0.78	0.73	0.81	0.76	0.73	0.79	0.75	0.72	0.69																	
	2.5	0.94	0.88	0.83	0.93	0.87	0.83	0.79	0.85	0.81	0.78	0.83	0.80	0.77	0.74																	
	3	0.96	0.91	0.87	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.78																	
	4	0.99	0.95	0.92	0.98	0.94	0.91	0.88	0.92	0.89	0.86	0.90	0.87	0.85	0.83																	
光源形式 CET402WWE-N14A	5	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.95	0.92	0.90	0.92	0.90	0.89	0.86																	
器具光束 2,010 lm	7	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.94	0.93	0.90																	
	10	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.94																	
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> 																														
上方光束 Fu= 0%																																
下方光束 Fd= 100%																																
最大取付間隔																																
A-A 1.26 H																																
B-B 1.28 H																																
保守率	良	0.86																														
	中	0.81																														
	否	0.72																														
光度 (cd/1000 lm)																																
	A-0	B-B	C-0	A'-0	C'-0																											
0	358	358	358																													
10	349	354	351																													
20	330	333	330																													
30	301	304	299																													
40	265	263	261																													
50	215	214	212																													
60	158	160	159																													
70	87	102	100																													
80	9	37	17																													
90																																
100																																
110																																
120																																
130																																
140																																
150																																
160																																
170																																
180																																
		<div>配光曲線 (cd/1000 lm)</div> 