
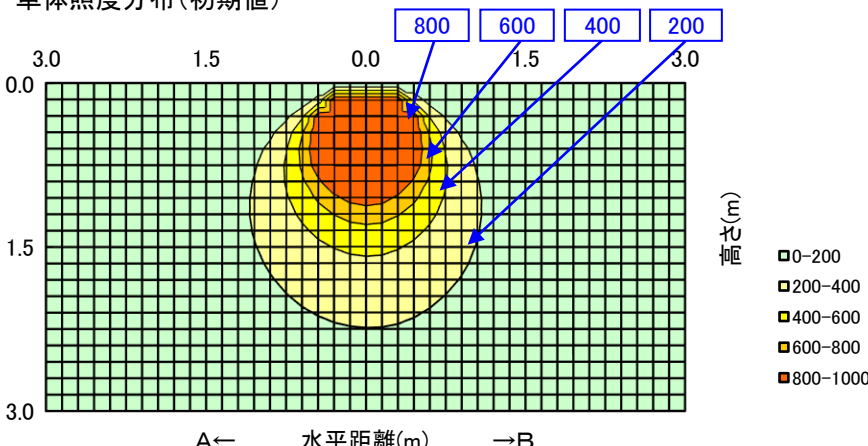
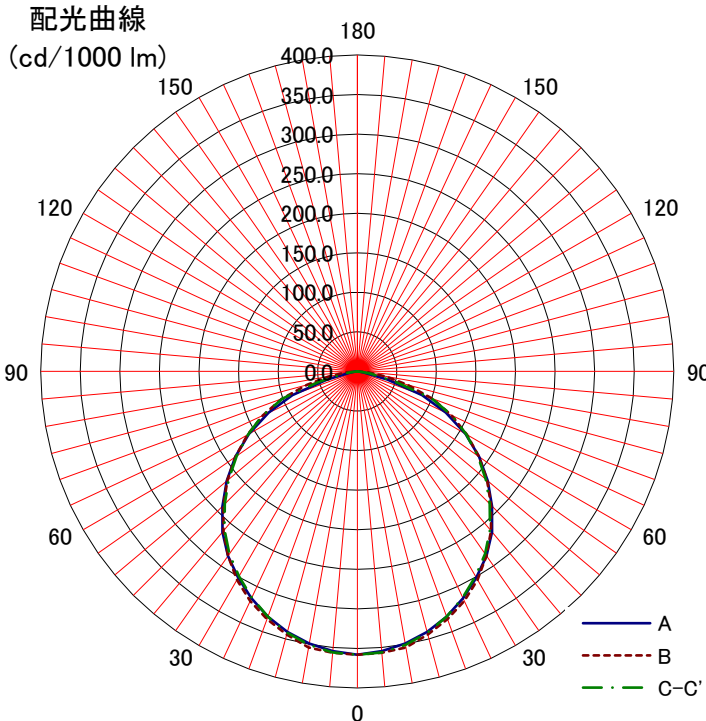


日立照明器具 照明特性																															
名称: 交換形LED埋込形	反射率	天井	80%			70%				50%			30%			0%															
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%															
		床	10%													0%															
形式: TC4A1	室指数	固有照明率 S/H=1.0																													
<備考>	0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.39	0.34	0.44	0.38	0.34	0.32																
	0.8	0.68	0.57	0.50	0.67	0.57	0.49	0.44	0.55	0.49	0.44	0.54	0.48	0.43	0.41																
姿図 	1	0.75	0.64	0.57	0.73	0.64	0.57	0.51	0.62	0.56	0.51	0.61	0.55	0.51	0.48																
	1.25	0.81	0.71	0.64	0.79	0.71	0.64	0.59	0.69	0.63	0.58	0.67	0.62	0.58	0.56																
	1.5	0.85	0.77	0.70	0.84	0.76	0.70	0.65	0.74	0.69	0.64	0.72	0.68	0.64	0.61																
	2	0.91	0.84	0.78	0.89	0.83	0.78	0.73	0.81	0.76	0.73	0.79	0.75	0.72	0.69																
	2.5	0.94	0.88	0.83	0.93	0.87	0.83	0.79	0.85	0.81	0.78	0.83	0.80	0.77	0.74																
	3	0.96	0.91	0.87	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.78																
光源形式	4	0.99	0.95	0.92	0.98	0.94	0.91	0.88	0.92	0.89	0.86	0.90	0.87	0.85	0.83																
CET403WF-X14A	5	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.95	0.92	0.90	0.92	0.90	0.89	0.86																
器具光束	7	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.94	0.93	0.90																
2,800 lm	10	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.94																
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div>  <div>0-200 200-400 400-600 600-800 800-1000</div>																													
上方光束 Fu= 0%																															
下方光束 Fd= 100%																															
最大取付間隔																															
A-A 1.26 H																															
B-B 1.28 H																															
保守率	良	0.86	<div>配光曲線</div>  <div>0 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160 170 180</div>																												
	中	0.81																													
	否	0.72																													
光度 (cd/1000 lm)																															
	A-0	B-B																C-0	A'-0	C'-0											
0	358	358																358													
10	349	354	351																												
20	330	333	330																												
30	301	304	299																												
40	265	263	261																												
50	215	214	212																												
60	158	160	159																												
70	87	102	100																												
80	9	37	17																												
90																															
100																															
110																															
120																															
130																															
140																															
150																															
160																															
170																															
180																															