
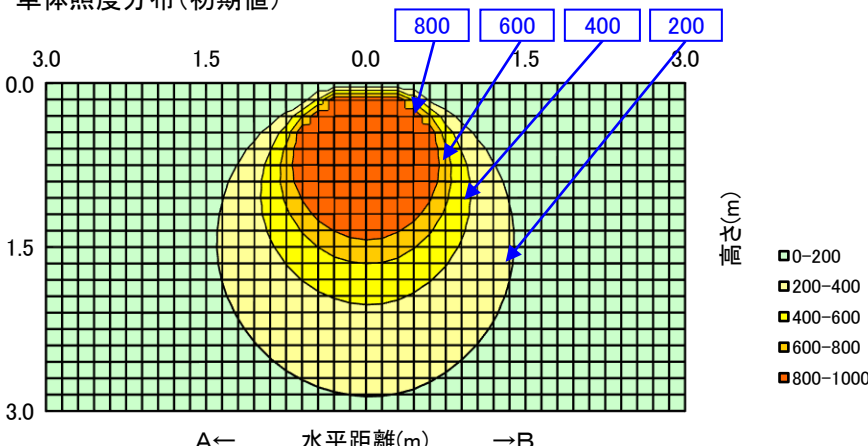
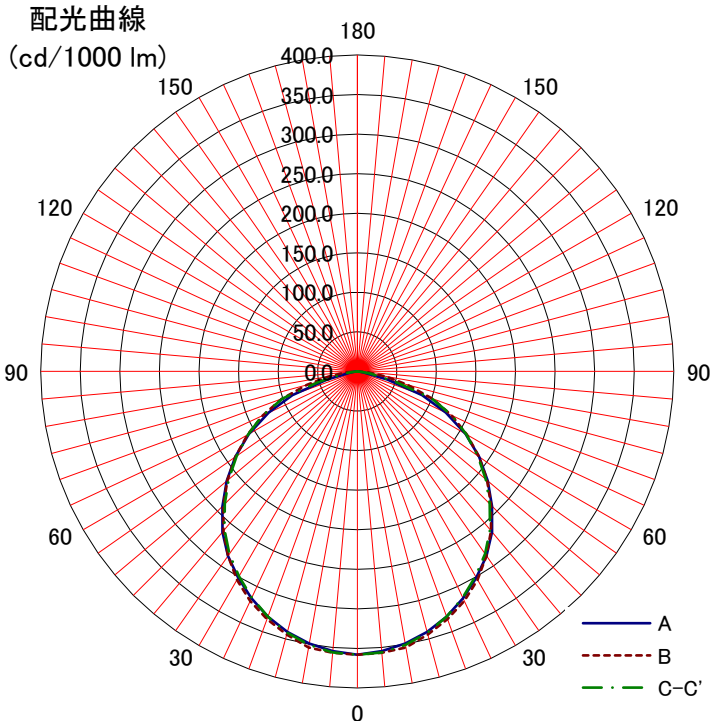


日立照明器具 照明特性																
名称: 交換形LED埋込形	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
形式: TC4A1	室指数	固有照明率 S/H=1.0														
<備考>	0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.39	0.34	0.44	0.38	0.34	0.32	
	0.8	0.68	0.57	0.50	0.67	0.57	0.49	0.44	0.55	0.49	0.44	0.54	0.48	0.43	0.41	
姿図 	1	0.75	0.64	0.57	0.73	0.64	0.57	0.51	0.62	0.56	0.51	0.61	0.55	0.51	0.48	
	1.25	0.81	0.71	0.64	0.79	0.71	0.64	0.59	0.69	0.63	0.58	0.67	0.62	0.58	0.56	
	1.5	0.85	0.77	0.70	0.84	0.76	0.70	0.65	0.74	0.69	0.64	0.72	0.68	0.64	0.61	
	2	0.91	0.84	0.78	0.89	0.83	0.78	0.73	0.81	0.76	0.73	0.79	0.75	0.72	0.69	
	2.5	0.94	0.88	0.83	0.93	0.87	0.83	0.79	0.85	0.81	0.78	0.83	0.80	0.77	0.74	
	3	0.96	0.91	0.87	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.78	
光源形式	4	0.99	0.95	0.92	0.98	0.94	0.91	0.88	0.92	0.89	0.86	0.90	0.87	0.85	0.83	
CET405LE-X14A	5	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.95	0.92	0.90	0.92	0.90	0.89	0.86	
器具光束	7	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.94	0.93	0.90	
4,590 lm	10	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.94	
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div>  <div>800 600 400 200</div> <div>3.0 1.5 0.0 1.5 3.0</div> <div>0.0 1.5 3.0</div> <div>A← 水平距離(m) →B</div> <div>(E) 高さ</div> <div>0-200 200-400 400-600 600-800 800-1000</div>														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.26 H																
B-B 1.28 H																
保守率	良	0.86														
	中	0.81														
	否	0.72														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	358	358	358													
10	349	354	351													
20	330	333	330													
30	301	304	299													
40	265	263	261													
50	215	214	212													
60	158	160	159													
70	87	102	100													
80	9	37	17													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																
<div>配光曲線 (cd/1000 lm)</div>  <div>180 150 120 90 60 30 0</div> <div>400.0 350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0</div> <div>A B C-C'</div>																