
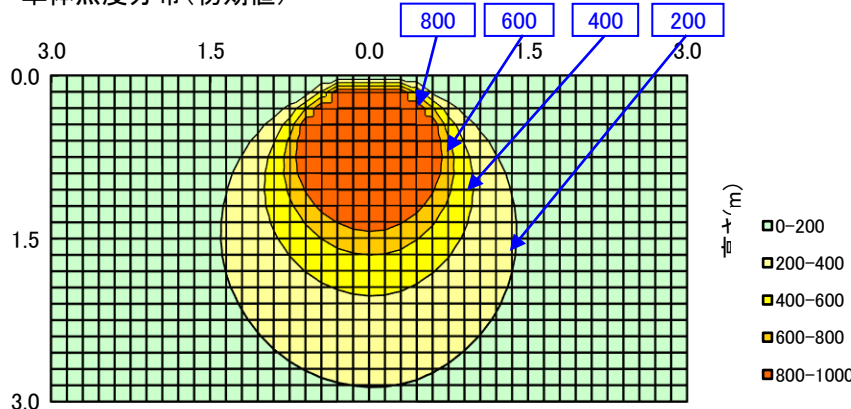
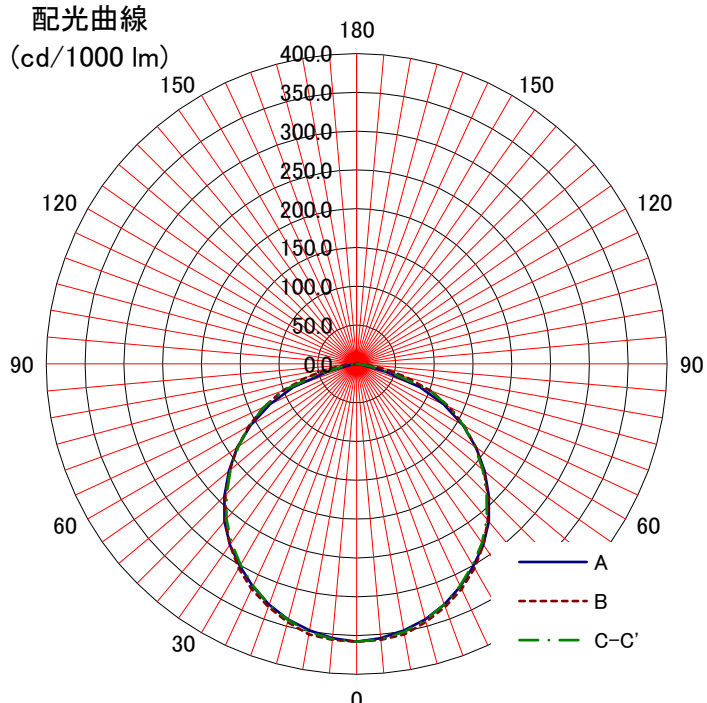
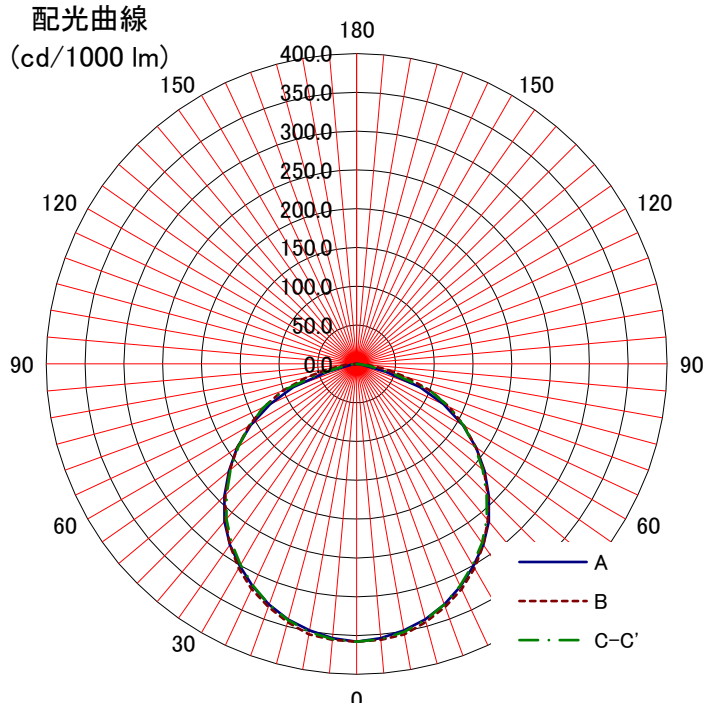


# 日立照明器具 照明特性

名称: 交換形LED埋込形	反射率	天井	80%			70%				50%			30%			0%			
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%														0%		
形式: TC4A1	室指数	固有照明率 S/H=1.0																	
〈備考〉	0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.39	0.34	0.44	0.38	0.34	0.32				
	0.8	0.68	0.57	0.50	0.67	0.57	0.49	0.44	0.55	0.49	0.44	0.54	0.48	0.43	0.41				
姿図 	1	0.75	0.64	0.57	0.73	0.64	0.57	0.51	0.62	0.56	0.51	0.61	0.55	0.51	0.48				
	1.25	0.81	0.71	0.64	0.79	0.71	0.64	0.59	0.69	0.63	0.58	0.67	0.62	0.58	0.56				
	1.5	0.85	0.77	0.70	0.84	0.76	0.70	0.65	0.74	0.69	0.64	0.72	0.68	0.64	0.61				
	2	0.91	0.84	0.78	0.89	0.83	0.78	0.73	0.81	0.76	0.73	0.79	0.75	0.72	0.69				
	2.5	0.94	0.88	0.83	0.93	0.87	0.83	0.79	0.85	0.81	0.78	0.83	0.80	0.77	0.74				
	3	0.96	0.91	0.87	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.78				
	4	0.99	0.95	0.92	0.98	0.94	0.91	0.88	0.92	0.89	0.86	0.90	0.87	0.85	0.83				
光源形式 CET405LE-N14A	5	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.95	0.92	0.90	0.92	0.90	0.89	0.86				
器具光束 4,590 lm	7	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.94	0.93	0.90				
	10	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.94				
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> 																	
上方光束 Fu= 0%																			
下方光束 Fd= 100%																			
最大取付間隔		<div>配光曲線</div> 																	
A-A 1.26 H																			
B-B 1.28 H																			
保守率	良															0.86			
	中															0.81			
	否															0.72			
光度 (cd/1000 lm)																<div>配光曲線</div> 			
	A-0	B-B	C-0	A'-0	C'-0														
0	358	358	358																
10	349	354	351																
20	330	333	330																
30	301	304	299																
40	265	263	261																
50	215	214	212																
60	158	160	159																
70	87	102	100																
80	9	37	17																
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			