



日立照明器具 照明特性

名称: 交換形LED埋込形	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														
形式: TC4A1	室指数	固有照明率 S/H=1.0															
<備考>	0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.39	0.34	0.44	0.38	0.34	0.32		
	0.8	0.68	0.57	0.50	0.67	0.57	0.49	0.44	0.55	0.49	0.44	0.54	0.48	0.43	0.41		
姿図 	1	0.75	0.64	0.57	0.73	0.64	0.57	0.51	0.62	0.56	0.51	0.61	0.55	0.51	0.48		
	1.25	0.81	0.71	0.64	0.79	0.71	0.64	0.59	0.69	0.63	0.58	0.67	0.62	0.58	0.56		
	1.5	0.85	0.77	0.70	0.84	0.76	0.70	0.65	0.74	0.69	0.64	0.72	0.68	0.64	0.61		
	2	0.91	0.84	0.78	0.89	0.83	0.78	0.73	0.81	0.76	0.73	0.79	0.75	0.72	0.69		
	2.5	0.94	0.88	0.83	0.93	0.87	0.83	0.79	0.85	0.81	0.78	0.83	0.80	0.77	0.74		
	3	0.96	0.91	0.87	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.78		
	4	0.99	0.95	0.92	0.98	0.94	0.91	0.88	0.92	0.89	0.86	0.90	0.87	0.85	0.83		
光源形式	5	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.95	0.92	0.90	0.92	0.90	0.89	0.86		
CET407NG-X14A	7	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.94	0.93	0.90		
器具光束	10	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.94		
6,600 lm																	


器具効率 Ft= 100%			
上方光束 Fu= 0%			
下方光束 Fd= 100%			
最大取付間隔			
A-A		1.26	H
B-B		1.28	H
保守率	良	0.86	
	中	0.81	
	否	0.72	
光度 (cd/1000 lm)			
	A-0	B-B	C-0
0	358	358	358
10	349	354	351
20	330	333	330
30	301	304	299
40	265	263	261
50	215	214	212
60	158	160	159
70	87	102	100
80	9	37	17
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布 (初期値)

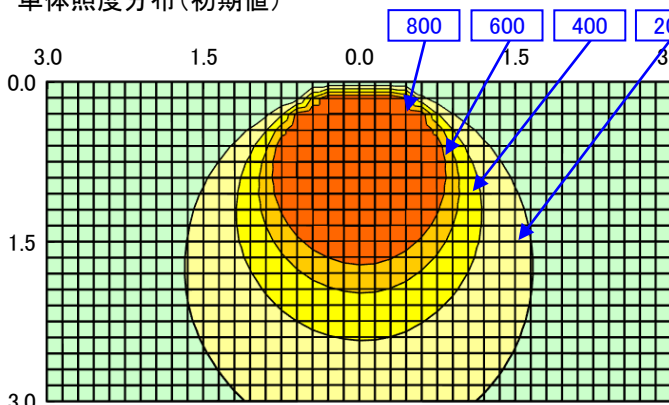

0-200
200-400
400-600
600-800
800-1000

配光曲線 (cd/1000 lm)

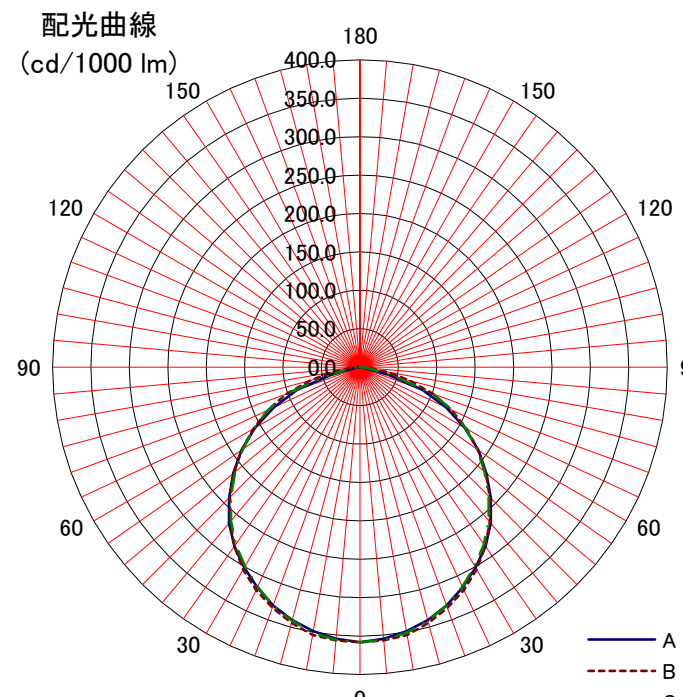

A
B
C-C'