



# 日立照明器具 照明特性

| 名称: 交換形LED埋込形   | 反射率  | 天井            | 80%  |      |      | 70%  |      |      |      | 50%  |      |      | 30%  |      |      | 0% |  |
|---|------|---------------|------|------|------|------|------|------|------|------|------|------|------|------|------|----|--|
|   |      | 壁             | 70%  | 50%  | 30%  | 70%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0% |  |
|   |      | 床             | 10%  |      |      |      |      |      |      |      |      |      |      |      |      |    |  |
| 形式: TC4A1   | 室指数  | 固有照明率 S/H=1.0 |      |      |      |      |      |      |      |      |      |      |      |      |      |    |  |
| <備考>  | 0.6  | 0.59          | 0.47 | 0.39 | 0.57 | 0.46 | 0.39 | 0.34 | 0.45 | 0.39 | 0.34 | 0.44 | 0.38 | 0.34 | 0.32 |    |  |
|   | 0.8  | 0.68          | 0.57 | 0.50 | 0.67 | 0.57 | 0.49 | 0.44 | 0.55 | 0.49 | 0.44 | 0.54 | 0.48 | 0.43 | 0.41 |    |  |
| 姿図<br> | 1    | 0.75          | 0.64 | 0.57 | 0.73 | 0.64 | 0.57 | 0.51 | 0.62 | 0.56 | 0.51 | 0.61 | 0.55 | 0.51 | 0.48 |    |  |
|   | 1.25 | 0.81          | 0.71 | 0.64 | 0.79 | 0.71 | 0.64 | 0.59 | 0.69 | 0.63 | 0.58 | 0.67 | 0.62 | 0.58 | 0.56 |    |  |
|   | 1.5  | 0.85          | 0.77 | 0.70 | 0.84 | 0.76 | 0.70 | 0.65 | 0.74 | 0.69 | 0.64 | 0.72 | 0.68 | 0.64 | 0.61 |    |  |
|   | 2    | 0.91          | 0.84 | 0.78 | 0.89 | 0.83 | 0.78 | 0.73 | 0.81 | 0.76 | 0.73 | 0.79 | 0.75 | 0.72 | 0.69 |    |  |
|   | 2.5  | 0.94          | 0.88 | 0.83 | 0.93 | 0.87 | 0.83 | 0.79 | 0.85 | 0.81 | 0.78 | 0.83 | 0.80 | 0.77 | 0.74 |    |  |
|   | 3    | 0.96          | 0.91 | 0.87 | 0.95 | 0.90 | 0.86 | 0.82 | 0.88 | 0.84 | 0.81 | 0.86 | 0.83 | 0.80 | 0.78 |    |  |
|   | 4    | 0.99          | 0.95 | 0.92 | 0.98 | 0.94 | 0.91 | 0.88 | 0.92 | 0.89 | 0.86 | 0.90 | 0.87 | 0.85 | 0.83 |    |  |
| 光源形式  | 5    | 1.01          | 0.98 | 0.95 | 1.00 | 0.97 | 0.94 | 0.91 | 0.95 | 0.92 | 0.90 | 0.92 | 0.90 | 0.89 | 0.86 |    |  |
| CET407WWG-N14A  | 7    | 1.04          | 1.01 | 0.99 | 1.02 | 1.00 | 0.98 | 0.96 | 0.98 | 0.96 | 0.95 | 0.96 | 0.94 | 0.93 | 0.90 |    |  |
| 器具光束  | 10   | 1.05          | 1.04 | 1.02 | 1.04 | 1.03 | 1.01 | 1.00 | 1.00 | 0.99 | 0.98 | 0.98 | 0.97 | 0.96 | 0.94 |    |  |
| 6,400 lm  |      |               |      |      |      |      |      |      |      |      |      |      |      |      |      |    |  |

|                 |     |      |     |      |      |
|-----------------|-----|------|-----|------|------|
| 器具効率 Ft= 100%   |     |      |     |      |      |
| 上方光束 Fu= 0%     |     |      |     |      |      |
| 下方光束 Fd= 100%   |     |      |     |      |      |
|                 |     |      |     |      |      |
| 最大取付間隔          |     |      |     |      |      |
| A-A             |     | 1.26 | H   |      |      |
| B-B             |     | 1.28 | H   |      |      |
| 保守率             | 良   | 0.86 |     |      |      |
|                 | 中   | 0.81 |     |      |      |
|                 | 否   | 0.72 |     |      |      |
| 光度 (cd/1000 lm) |     |      |     |      |      |
|                 | A-0 | B-B  | C-0 | A'-0 | C'-0 |
| 0               | 358 | 358  | 358 |      |      |
| 10              | 349 | 354  | 351 |      |      |
| 20              | 330 | 333  | 330 |      |      |
| 30              | 301 | 304  | 299 |      |      |
| 40              | 265 | 263  | 261 |      |      |
| 50              | 215 | 214  | 212 |      |      |
| 60              | 158 | 160  | 159 |      |      |
| 70              | 87  | 102  | 100 |      |      |
| 80              | 9   | 37   | 17  |      |      |
| 90              |     |      |     |      |      |
| 100             |     |      |     |      |      |
| 110             |     |      |     |      |      |
| 120             |     |      |     |      |      |
| 130             |     |      |     |      |      |
| 140             |     |      |     |      |      |
| 150             |     |      |     |      |      |
| 160             |     |      |     |      |      |
| 170             |     |      |     |      |      |
| 180             |     |      |     |      |      |


単体照度分布 (初期値)

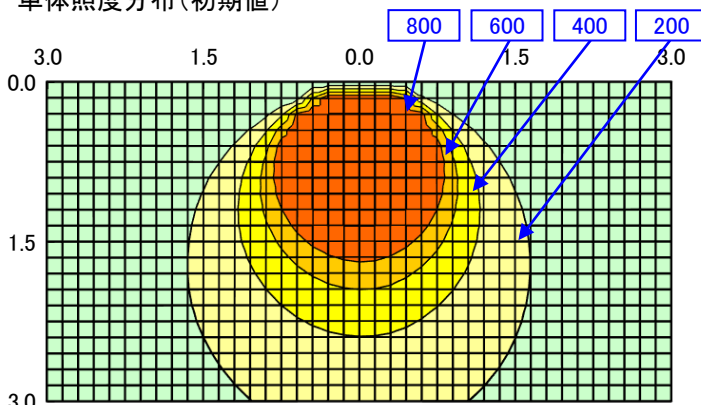

0-200  
200-400  
400-600  
600-800  
800-1000

A← 水平距離(m) →B

配光曲線 (cd/1000 lm)

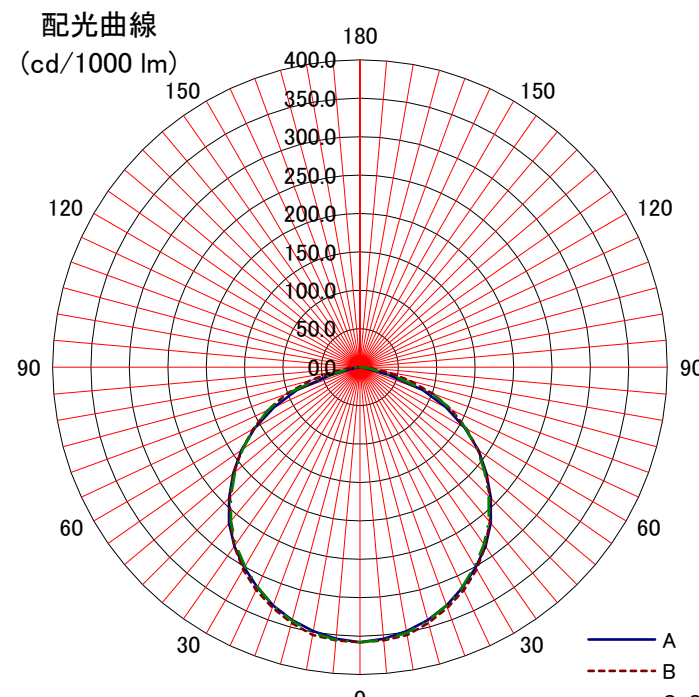

A  
B  
C-C'