
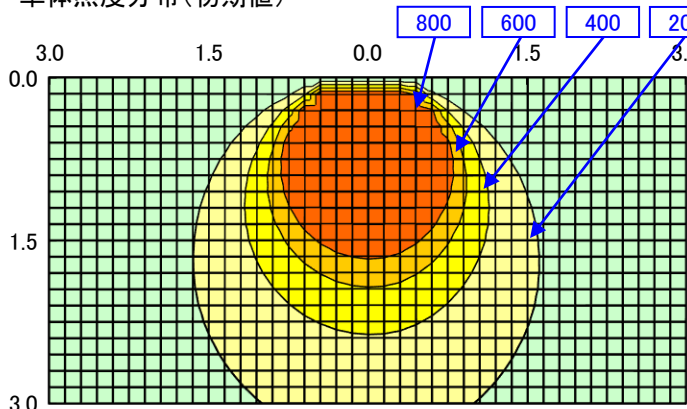
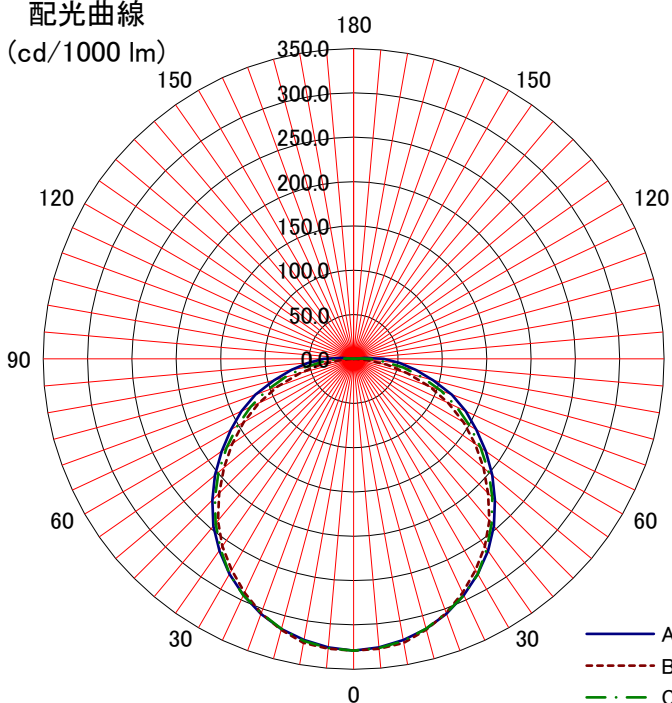


## 日立照明器具 照明特性

名称: 交換形LED埋込形	天井 反射率 壁 床	80%			70%				50%			30%			0%															
		70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%															
		10%														0%														
形式: TC4B	室指数	固有照明率 S/H=1.0																												
<div>〈備考〉</div> <div>姿図</div> <div></div>	0.6	0.57	0.45	0.37	0.56	0.44	0.37	0.32	0.43	0.36	0.31	0.42	0.36	0.31	0.29															
	0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.51	0.45	0.40	0.38															
	1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.59	0.53	0.48	0.58	0.52	0.47	0.45															
	1.25	0.79	0.69	0.61	0.77	0.68	0.61	0.55	0.66	0.60	0.54	0.64	0.59	0.54	0.52															
	1.5	0.83	0.74	0.67	0.82	0.73	0.66	0.61	0.71	0.65	0.60	0.69	0.64	0.60	0.57															
	2	0.89	0.81	0.75	0.87	0.80	0.74	0.69	0.78	0.73	0.68	0.76	0.71	0.68	0.65															
	2.5	0.92	0.86	0.80	0.91	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.76	0.73	0.70															
	3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.85	0.81	0.77	0.83	0.79	0.76	0.73															
光源形式 CET407NE-X14A	4	0.98	0.93	0.89	0.96	0.92	0.88	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.79															
器具光束 6,810 lm	5	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.89	0.87	0.90	0.87	0.85	0.82															
	7	1.03	1.00	0.97	1.01	0.98	0.96	0.93	0.96	0.94	0.92	0.94	0.92	0.90	0.87															
	10	1.05	1.03	1.01	1.03	1.01	0.99	0.98	0.99	0.97	0.96	0.96	0.95	0.94	0.91															
器具効率 Ft= 100%		<div>単体照度分布 (初期値)</div> <div></div>																												
上方光束 Fu= 0%																														
下方光束 Fd= 100%																														
最大取付間隔		<div>配光曲線 (cd/1000 lm)</div> <div></div>																												
A-A 1.28 H																														
B-B 1.26 H																														
保守率	良																0.86													
	中																0.81													
	否	0.72																												
光度 (cd/1000 lm)																														
	A-0	B-B	C-0	A'-0	C'-0																									
0	329	329	329																											
10	322	325	323																											
20	306	305	305																											
30	280	275	280																											
40	246	238	242																											
50	204	191	199																											
60	160	143	151																											
70	118	92	105																											
80	71	38	57																											
90	34	1	18																											
100																														
110																														
120																														
130																														
140																														
150																														
160																														
170																														
180																														