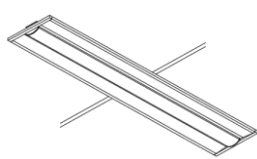
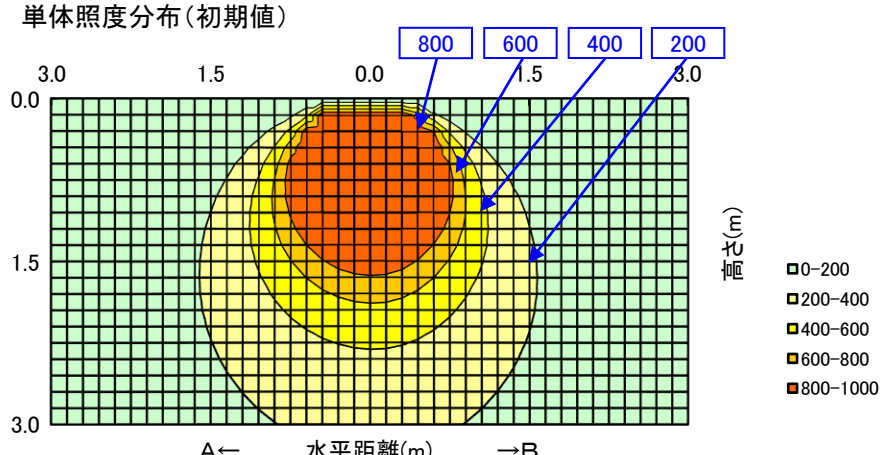
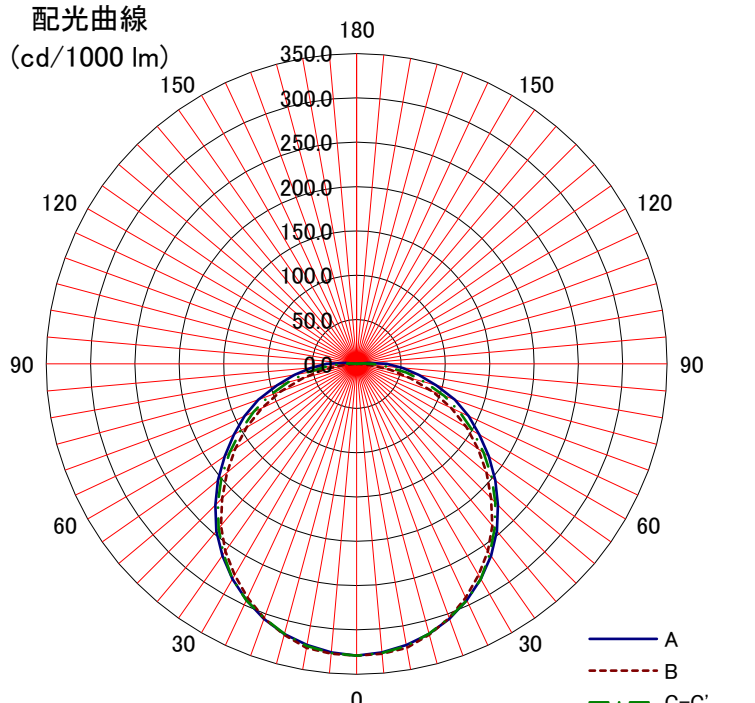


日立照明器具 照明特性

名称: 交換形LED埋込形		天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式: TC4B		床	10%													0%	
			固有照明率 S/H=1.0														
<備考>		室指数	0.6	0.57	0.45	0.37	0.56	0.44	0.37	0.32	0.43	0.36	0.31	0.42	0.36	0.31	0.29
		0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.51	0.45	0.40	0.38	
姿図 		1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.59	0.53	0.48	0.58	0.52	0.47	0.45	
		1.25	0.79	0.69	0.61	0.77	0.68	0.61	0.55	0.66	0.60	0.54	0.64	0.59	0.54	0.52	
		1.5	0.83	0.74	0.67	0.82	0.73	0.66	0.61	0.71	0.65	0.60	0.69	0.64	0.60	0.57	
		2	0.89	0.81	0.75	0.87	0.80	0.74	0.69	0.78	0.73	0.68	0.76	0.71	0.68	0.65	
		2.5	0.92	0.86	0.80	0.91	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.76	0.73	0.70	
		3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.85	0.81	0.77	0.83	0.79	0.76	0.73	
光源形式 CET407DE-N14A		4	0.98	0.93	0.89	0.96	0.92	0.88	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.79	
		5	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.89	0.87	0.90	0.87	0.85	0.82	
器具光束 6,480 lm		7	1.03	1.00	0.97	1.01	0.98	0.96	0.93	0.96	0.94	0.92	0.94	0.92	0.90	0.87	
		10	1.05	1.03	1.01	1.03	1.01	0.99	0.98	0.99	0.97	0.96	0.96	0.95	0.94	0.91	
器具効率 Ft= 100%			単体照度分布(初期値) 														
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
			最大取付間隔 A-A 1.28 H B-B 1.26 H														
保守率	良	0.86	配光曲線 (cd/1000 lm) 														
	中	0.81															
	否	0.72															
光度 (cd/1000 lm)			A-0	B-B	C-0	A'-0	C'-0										
	0	329	329	329													
	10	322	325	323													
	20	306	305	305													
	30	280	275	280													
	40	246	238	242													
	50	204	191	199													
	60	160	143	151													
	70	118	92	105													
	80	71	38	57													
	90	34	1	18													
	100																
	110																
	120																
	130																
	140																
	150																
	160																
	170																
	180																