
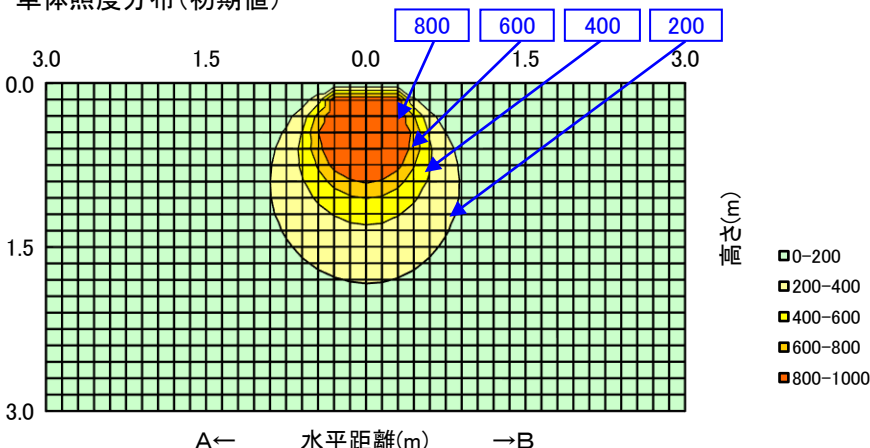
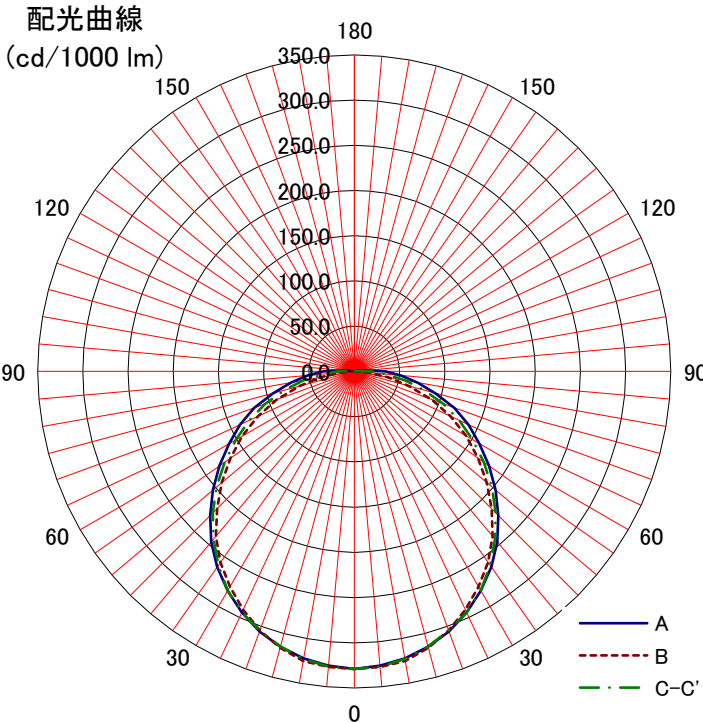


日立照明器具 照明特性																				
名称: 交換形LED埋込形	反射率	天井	80%			70%				50%			30%			0%				
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
		床	10%													0%				
	形式: TC4B1	室指数	固有照明率 S/H=1.0																	
<備考>	0.6	0.57	0.45	0.37	0.56	0.44	0.37	0.32	0.43	0.36	0.31	0.42	0.36	0.31	0.29					
	0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.51	0.45	0.40	0.38					
姿図 	1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.59	0.53	0.48	0.58	0.52	0.47	0.45					
	1.25	0.79	0.69	0.61	0.77	0.68	0.61	0.55	0.66	0.60	0.54	0.64	0.59	0.54	0.52					
	1.5	0.83	0.74	0.67	0.82	0.73	0.66	0.61	0.71	0.65	0.60	0.69	0.64	0.60	0.57					
	2	0.89	0.81	0.75	0.87	0.80	0.74	0.69	0.78	0.73	0.68	0.76	0.71	0.68	0.65					
	2.5	0.92	0.86	0.80	0.91	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.76	0.73	0.70					
	3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.85	0.81	0.77	0.83	0.79	0.76	0.73					
	4	0.98	0.93	0.89	0.96	0.92	0.88	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.79					
光源形式 CET402DE-X14A	5	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.89	0.87	0.90	0.87	0.85	0.82					
器具光束	7	1.03	1.00	0.97	1.01	0.98	0.96	0.93	0.96	0.94	0.92	0.94	0.92	0.90	0.87					
2,040 lm	10	1.05	1.03	1.01	1.03	1.01	0.99	0.98	0.99	0.97	0.96	0.96	0.95	0.94	0.91					
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div>  <div>0-200 200-400 400-600 600-800 800-1000</div>																		
上方光束 Fu= 0%																				
下方光束 Fd= 100%																				
最大取付間隔																				
A-A 1.28 H																				
B-B 1.26 H																				
保守率	良	0.86																		
	中	0.81																		
	否	0.72																		
光度 (cd/1000 lm)		<div>配光曲線 (cd/1000 lm)</div>  <div>A B C-C'</div>																		
	A-0																B-B	C-0	A'-0	C'-0
0	329																329	329		
10	322																325	323		
20	306																305	305		
30	280																275	280		
40	246																238	242		
50	204																191	199		
60	160																143	151		
70	118																92	105		
80	71																38	57		
90	34																1	18		
100																				
110																				
120																				
130																				
140																				
150																				
160																				
170																				
180																				