
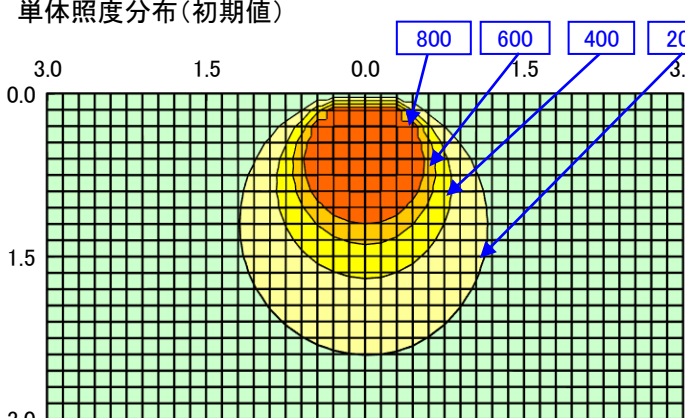
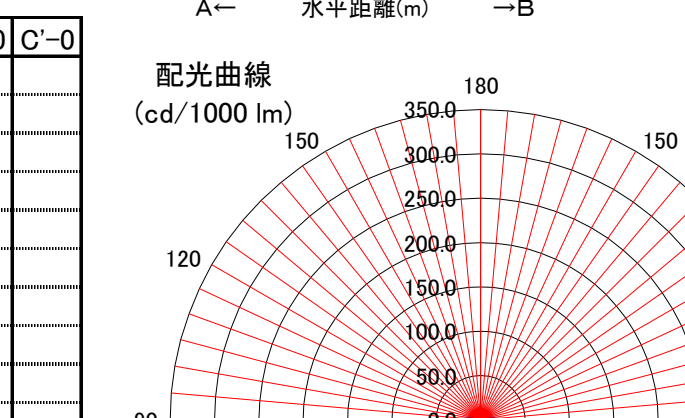
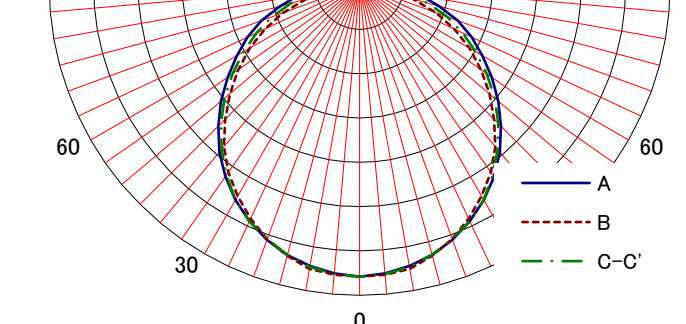


日立照明器具 照明特性

名称: 交換形LED埋込形		天井 反射率	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
形式: TC4B1		床	10%															0%
			室指数		固有照明率 S/H=1.0													
〈備考〉		0.6	0.57	0.45	0.37	0.56	0.44	0.37	0.32	0.43	0.36	0.31	0.42	0.36	0.31	0.29		
		0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.51	0.45	0.40	0.38		
姿図 		1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.59	0.53	0.48	0.58	0.52	0.47	0.45		
		1.25	0.79	0.69	0.61	0.77	0.68	0.61	0.55	0.66	0.60	0.54	0.64	0.59	0.54	0.52		
		1.5	0.83	0.74	0.67	0.82	0.73	0.66	0.61	0.71	0.65	0.60	0.69	0.64	0.60	0.57		
		2	0.89	0.81	0.75	0.87	0.80	0.74	0.69	0.78	0.73	0.68	0.76	0.71	0.68	0.65		
		2.5	0.92	0.86	0.80	0.91	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.76	0.73	0.70		
		3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.85	0.81	0.77	0.83	0.79	0.76	0.73		
光源形式 CET403DE-N14A		4	0.98	0.93	0.89	0.96	0.92	0.88	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.79		
		5	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.89	0.87	0.90	0.87	0.85	0.82		
器具光束 3,520 lm		7	1.03	1.00	0.97	1.01	0.98	0.96	0.93	0.96	0.94	0.92	0.94	0.92	0.90	0.87		
		10	1.05	1.03	1.01	1.03	1.01	0.99	0.98	0.99	0.97	0.96	0.96	0.95	0.94	0.91		
器具効率 Ft= 100%		<div>単体照度分布 (初期値)</div> 																
上方光束 Fu= 0%																		
下方光束 Fd= 100%																		
最大取付間隔		<div>A← 水平距離(m) →B</div> 																
A-A 1.28 H																		
B-B 1.26 H																		
保守率	良	0.86	<div>配光曲線 (cd/1000 lm)</div> 															
	中	0.81																
	否	0.72																
光度 (cd/1000 lm)																		
	A-0	B-B	C-0	A'-0	C'-0													
0	329	329	329															
10	322	325	323															
20	306	305	305															
30	280	275	280															
40	246	238	242															
50	204	191	199															
60	160	143	151															
70	118	92	105															
80	71	38	57															
90	34	1	18															
100																		
110																		
120																		
130																		
140																		
150																		
160																		
170																		
180																		